



Recessed Wall Mount


for Jabra PanaCast 50

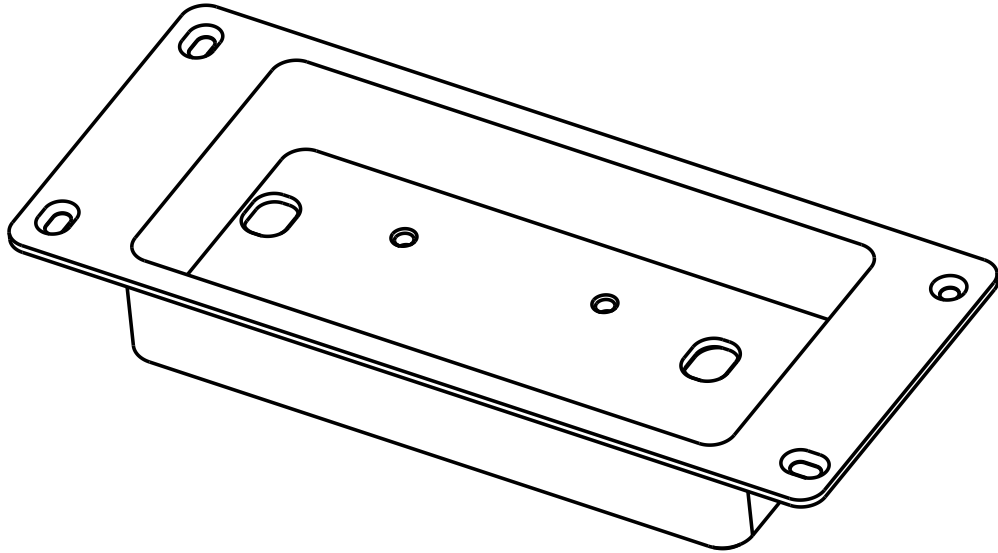


Wall bracket

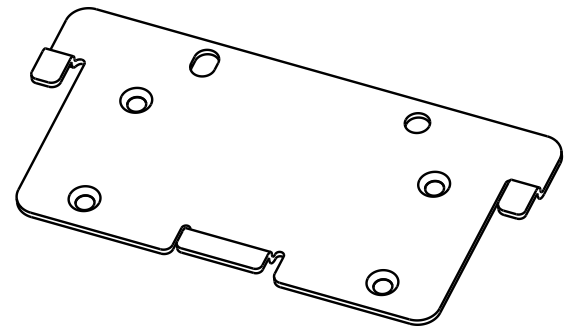

Mounting plate



Tilt lock

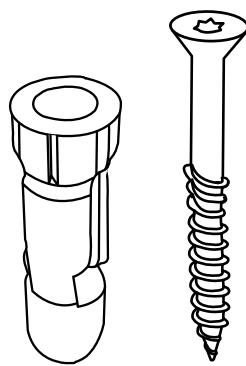


Fisher wall plug
5/16 " (8mm)
(4 pcs)




M5 x8
(2 pcs)

Disclaimer: Though products can be designed to meet the Americans with Disabilities Act (ADA) guidelines, the United States federal government does not issue approvals or certify specific products as ADA-compliant, nor does any other body. Jabra does not certify that this product is prima facie compliant with all aspects of the ADA as the application, placement, and surroundings of the product within the space impact accessibility and usability. However, following the instructions provided herein may allow the product to comply with certain ADA standards in effect from time to time.


- 1 Cut a hole in the wall. The hole should be a minimum of 3 - 1/8" (8cm) below the screen.

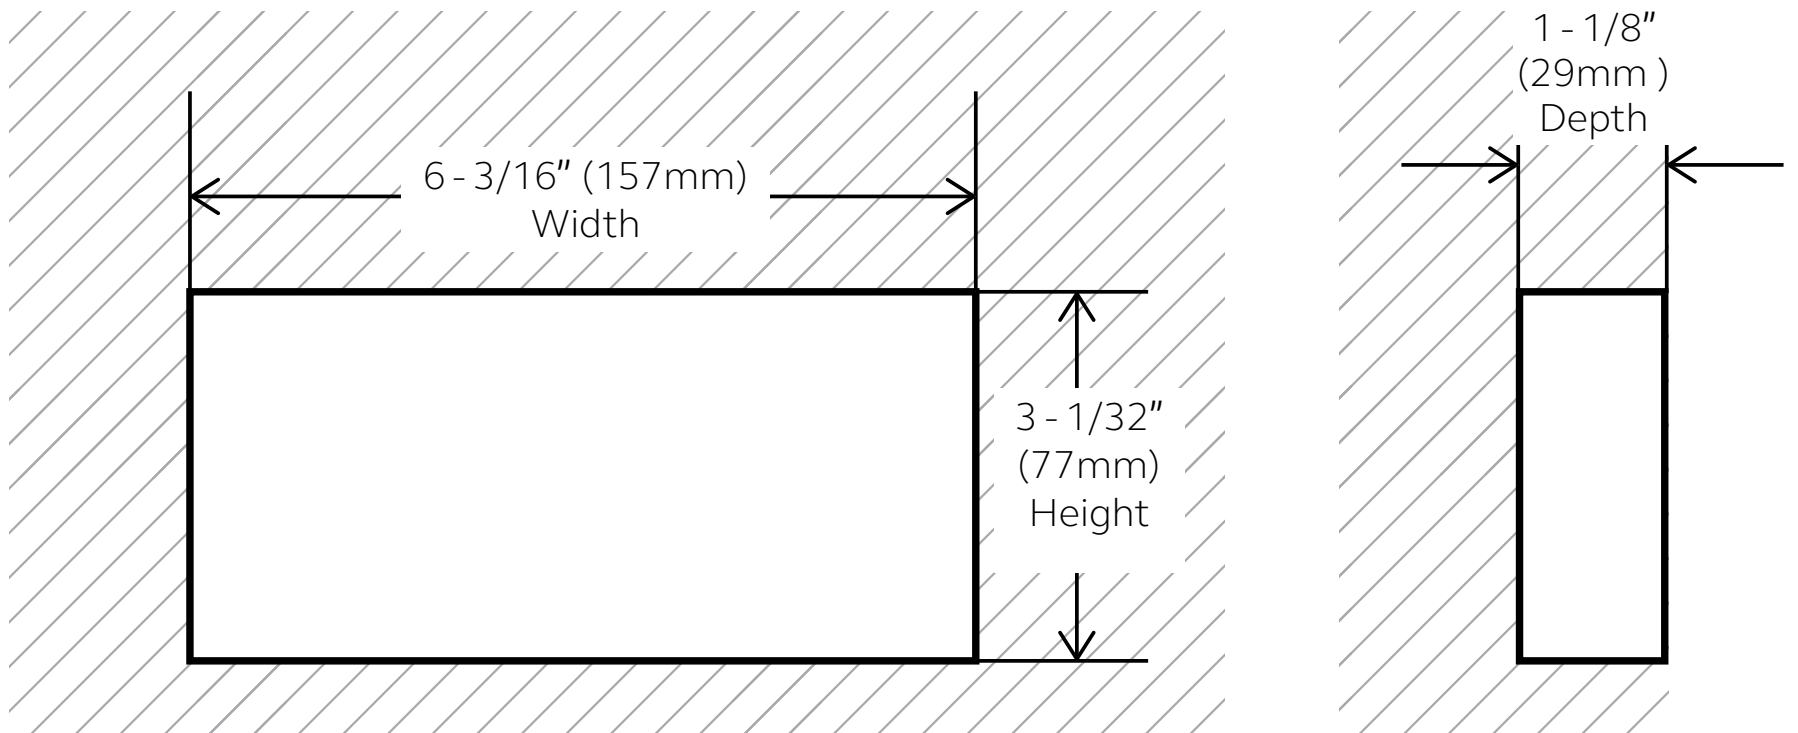

- 2 Mark the wall with drill holes and then drill into the wall using an 5/16" (8mm) drill bit.

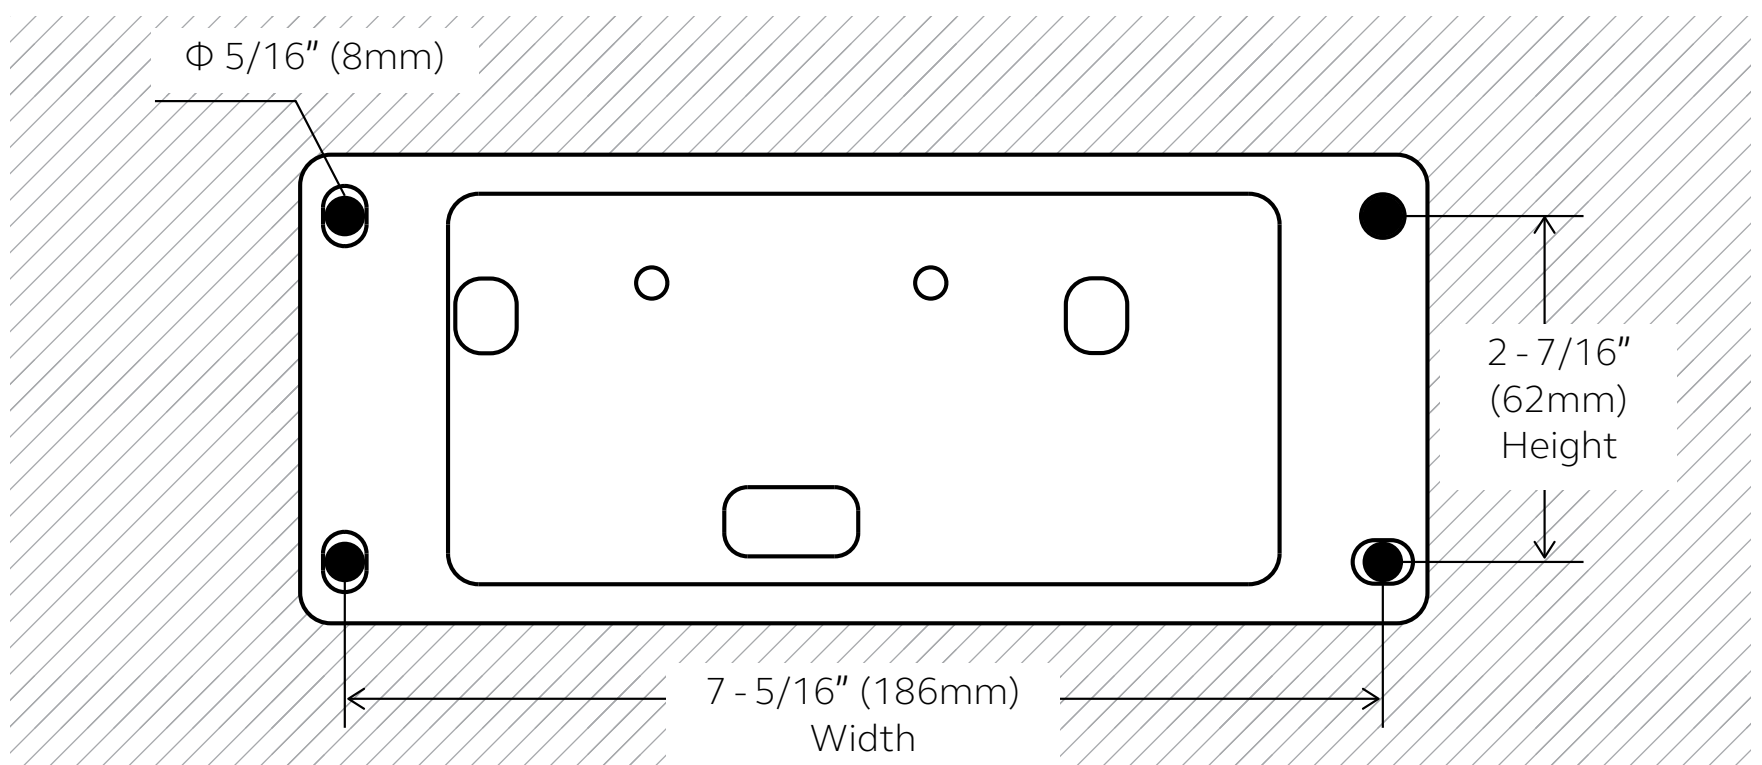


- 3 Attach the wall bracket to the wall using the supplied screws.

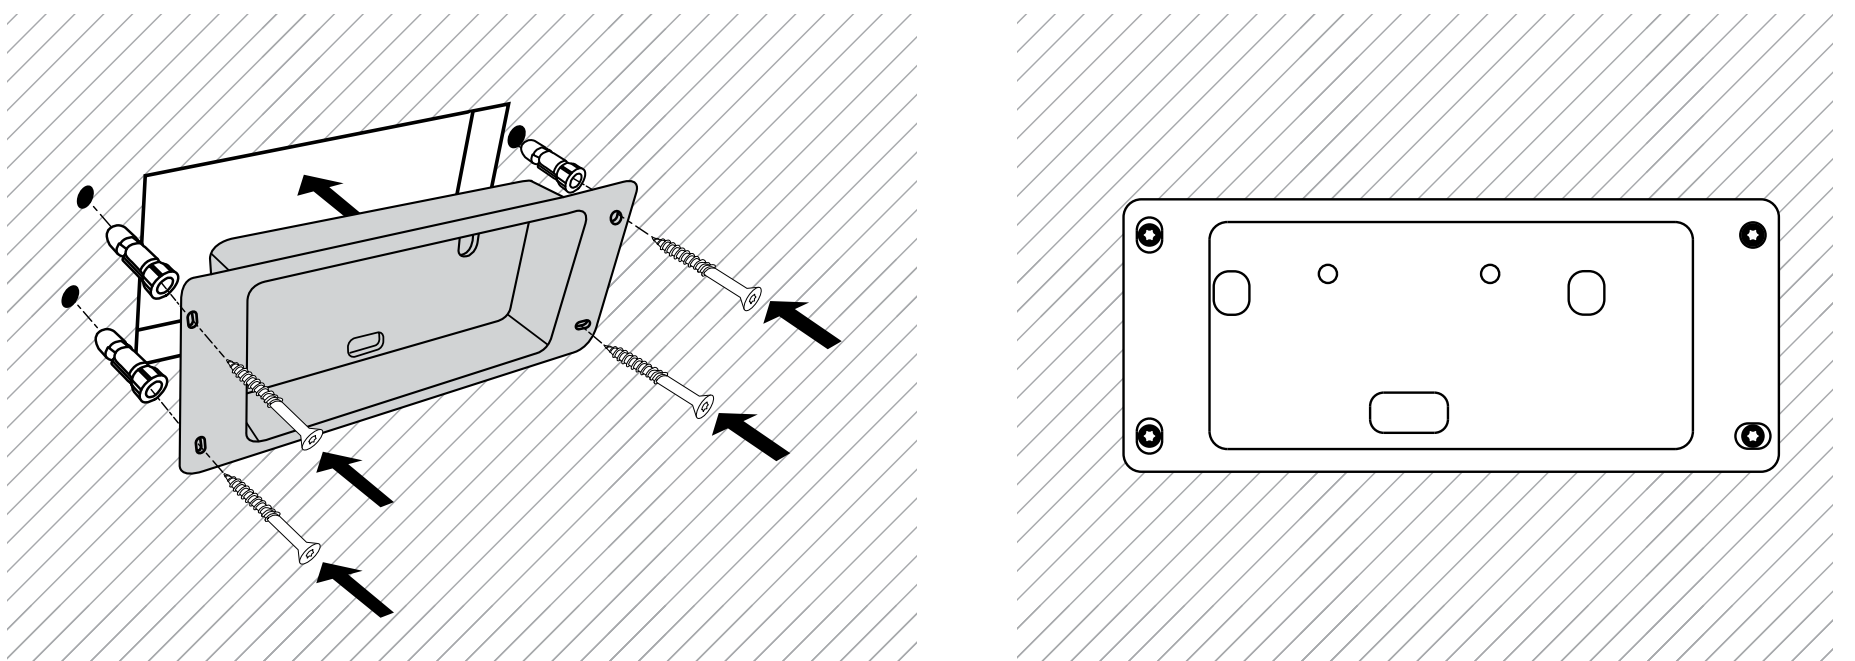



4

Remove the original mounting plate from the Jabra PanaCast 50. The screws will be reused in Step 5.

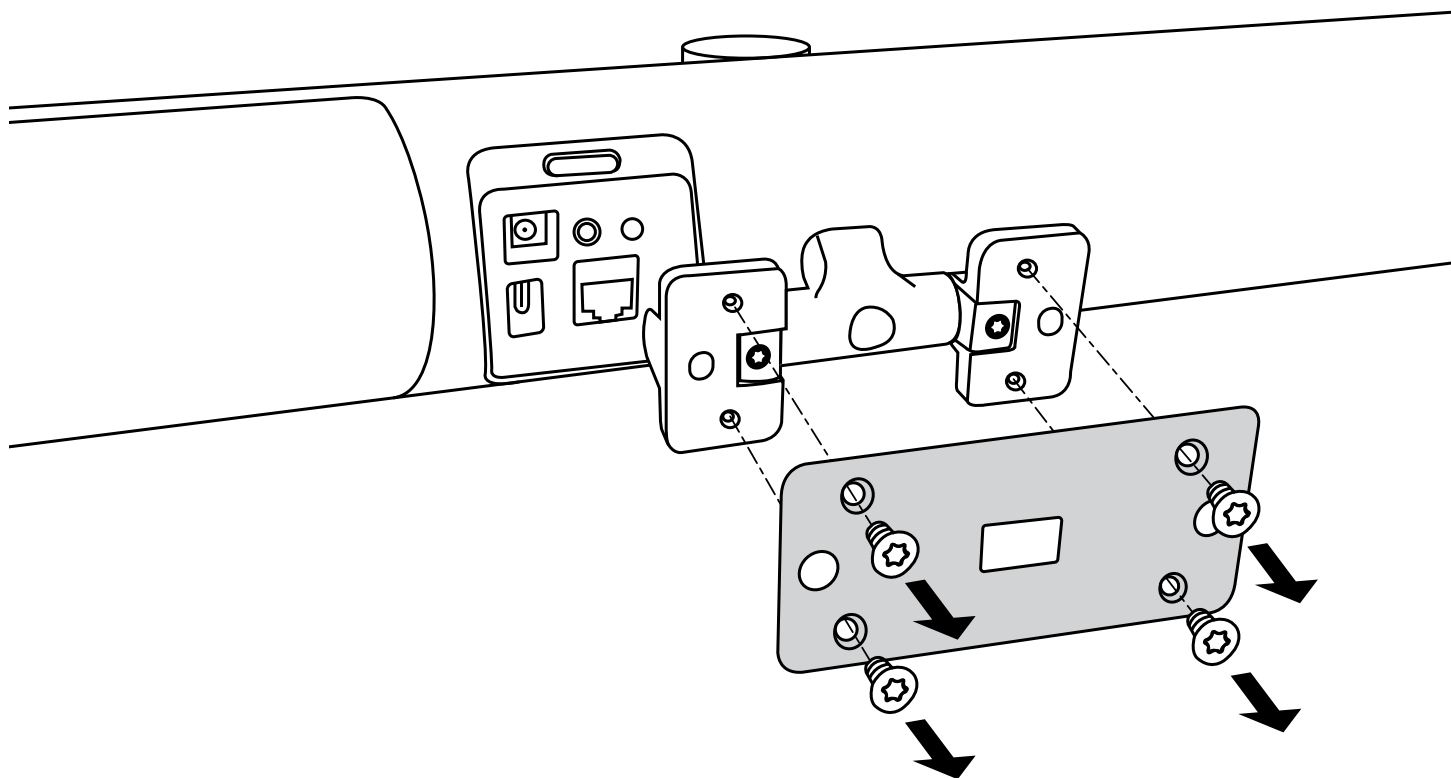


5

Attach the tilt lock and new recessed mounting plate to the Jabra PanaCast 50. Ensure that the tilt lock is in the unlocked position.

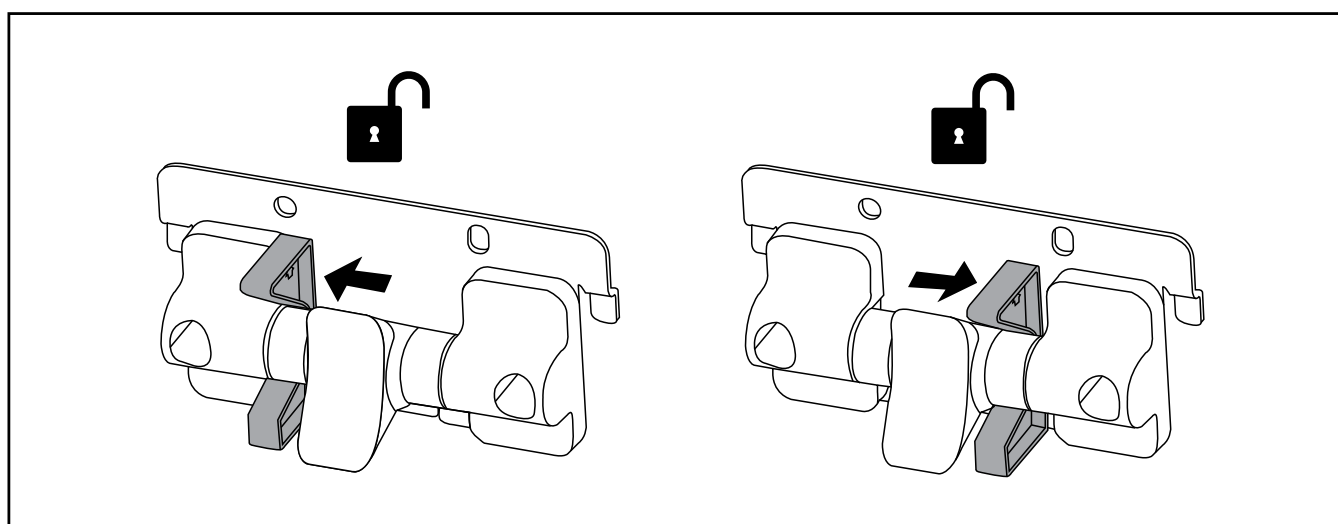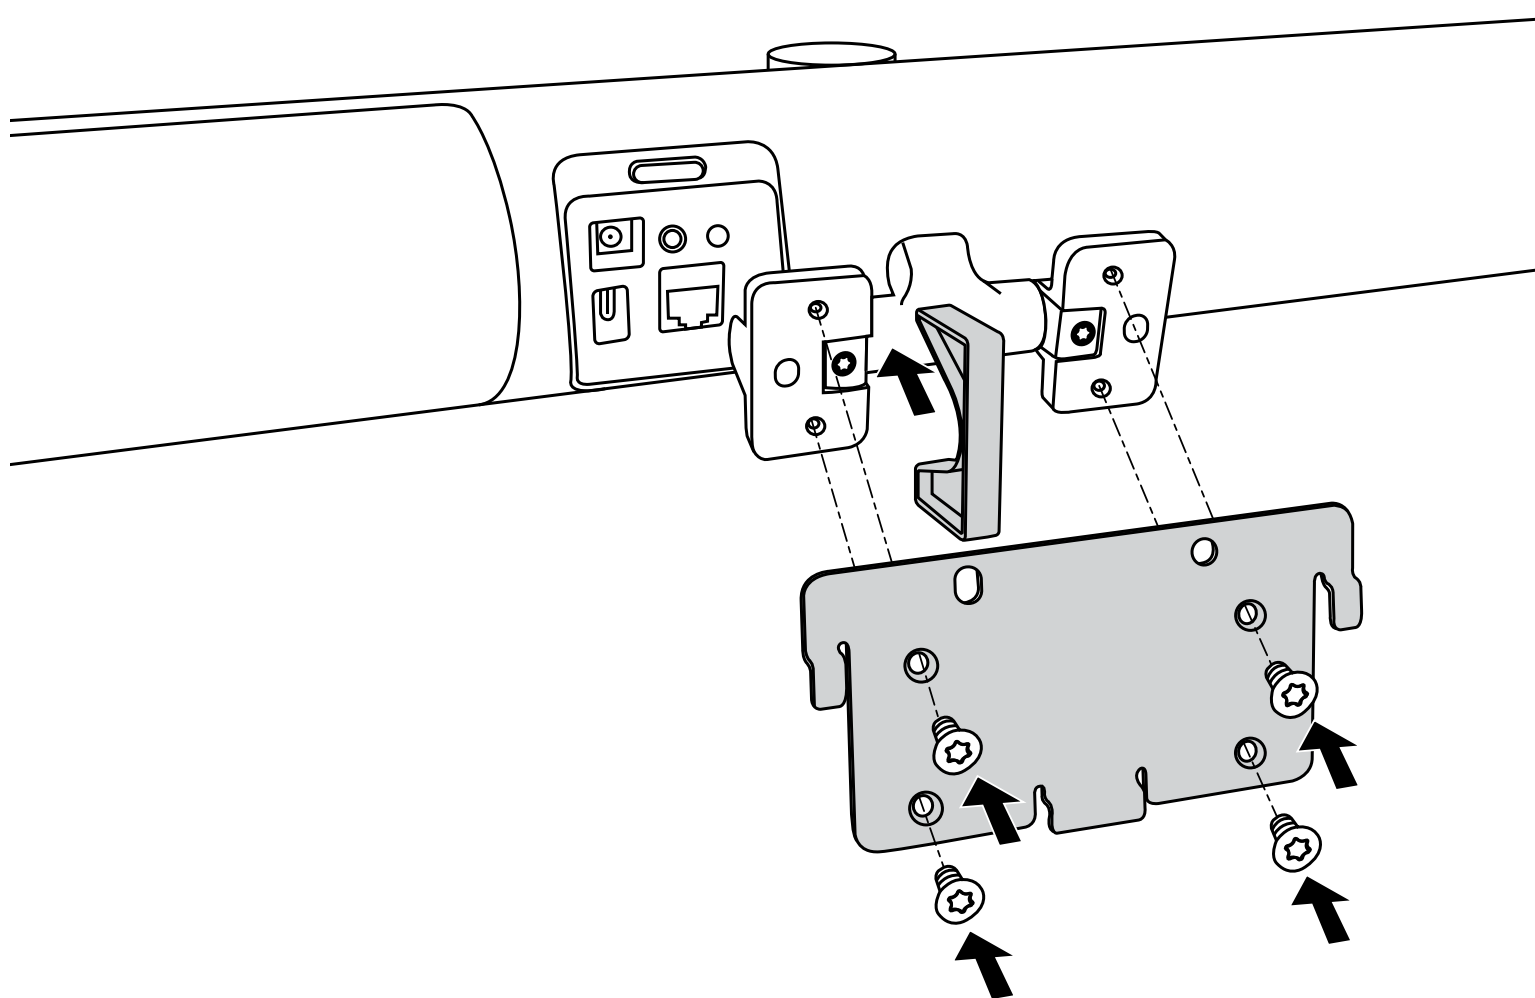



6

Plug in the necessary cables.

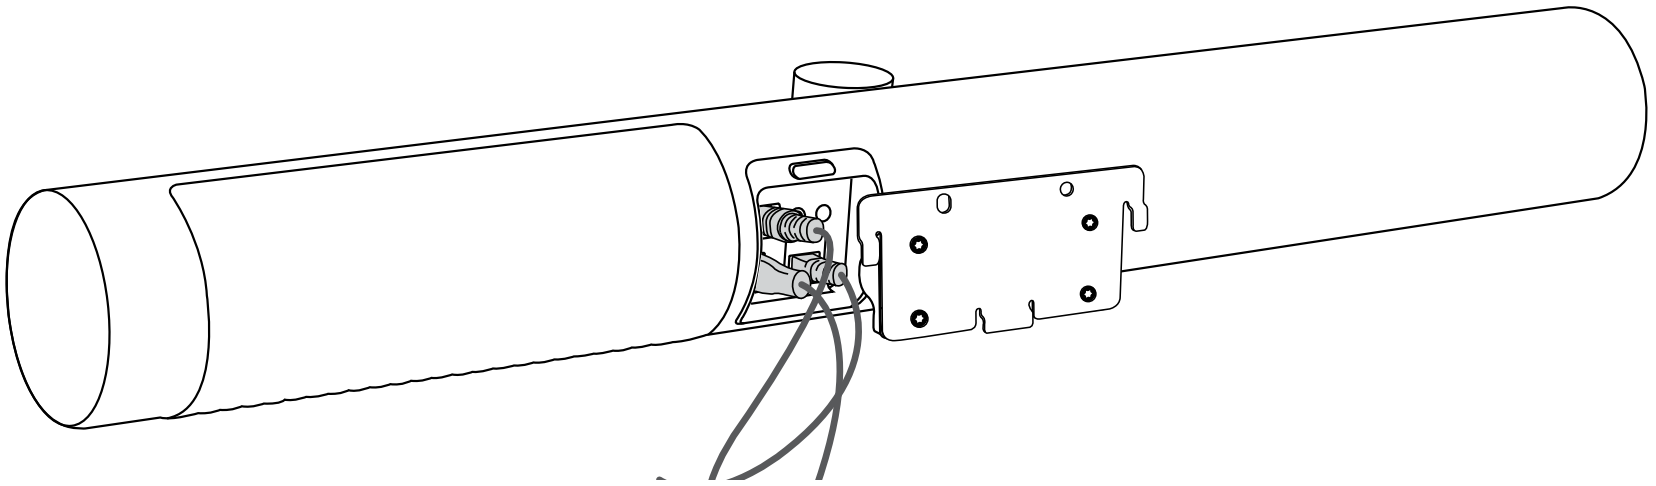

7

Attach the Jabra PanaCast 50 to the wall bracket.

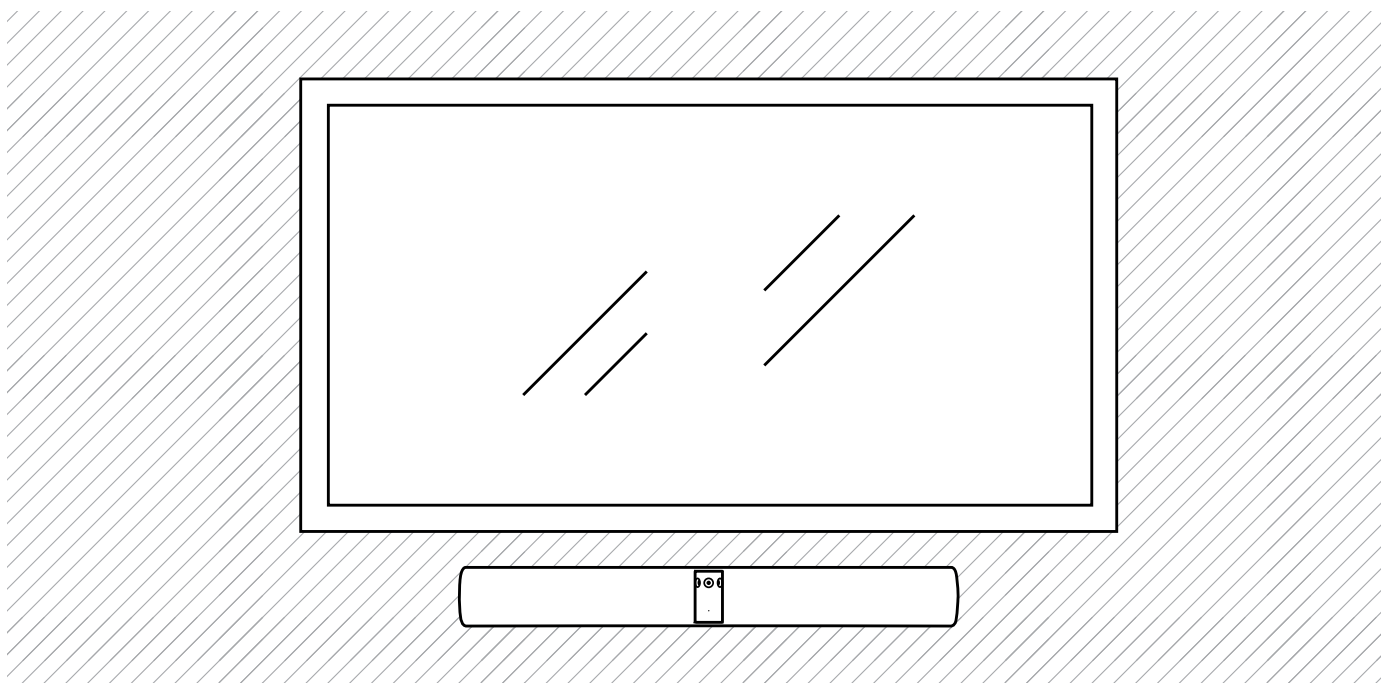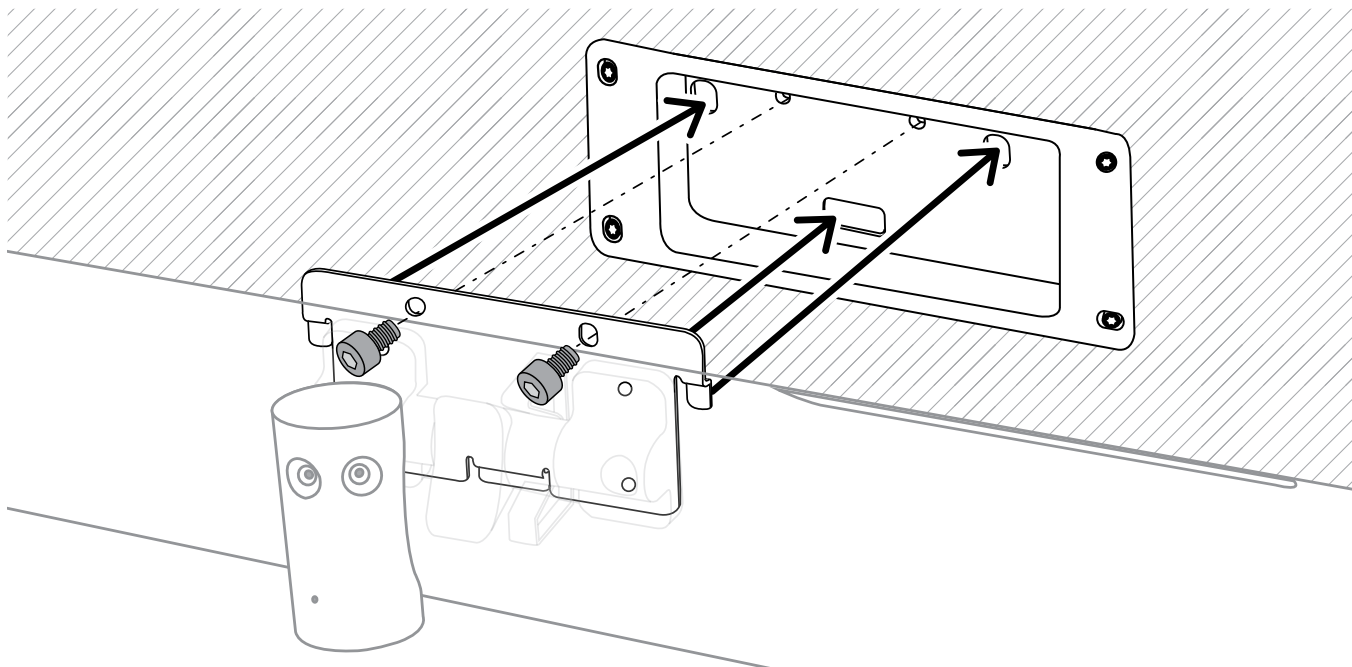

8

If the Jabra PanaCast 50 is installed underneath the screen, ensure the camera is pointing straight ahead. Move the tilt lock to the locked position to prevent the camera from being able to tilt up and down.

