

Procure




**Powered By Choice,
Driven By You.**

RP703 Interactive Flat Panel



Input and Output Terminals

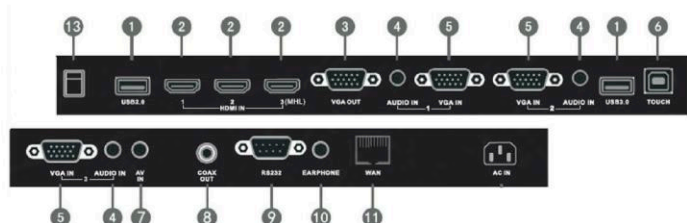

No.	Name	Description
1	USB	Connect USB devices such as mobile hard disk, U disk, USB keyboard and mouse, USB drivers, etc
2	HDMI IN	High-definition multimedia interface signal input, connect to PC (personal computer) with HDMI output, set-top box, or other video device. Touch signal is also supported. HDMI 3 input supports MHL
3	VGA OUT	Connect to display devices with VGA input
4	AUDIO IN	External computer audio input
5	VGA IN	External computer image input
6	TOUCH	RP703 has default touch screen. To make external computer touch controlled: the driver should be installed, connect VGA and audio signal of external computer, also connect USB port of external computer to the RP703. (Default touch function works with PC, VGA and HDMI inputs)
7	AV IN	Composite video and audio input
8	COAX OUT	Coaxial output
9	RS232	Serial interface, used for mutual transfer of data between devices
10	EARPHONE	Connect to device with headphone input
11	WAN	Wan interface, connect RJ45 terminals. (Only for Android)

Features

- Up to 20-point Multi-touch Interactivity
- Touch Driver Free & Multi-platform Support
- Built-in Android OS
- Built-in Smart Annotation Tool NFC Pen & EZWrite Software
- Anti-Glare / Low Blue Light / Flicker free / Anti-bacteria Glass
- Touch OSD Menu

Product Specifications

Panel	Screen Diagonal	70"		
	Backlight	LED		
	Resolution	1920 x 1080		
	Aspect Ratio	16 : 9		
	Brightness	300 nits		
	Contrast Ratio	4000 : 1		
	Viewing Angle	178° / 178°		
	Color Gamut (x% NTSC)	66%		
	Frame Rate	60Hz		
	Response Time	8ms		
	Panel Bit	8-bit		
	Light Life	30,000 hrs		
	Orientation	Landscape		
Touch Solution	Touch Technology	IR		
	Number of touches	Multi-touch up to 20 touches		
	Touch Interface	USB x 1		
Cover Glass	Resolution	32767 x 32767		
	Thickness	Tempered, 4 mm		
	Hardness	7H		
	AG Coating	80%		
Speaker	Built-in Speaker	10W x 2		
Interface	Input	Power (AC) inlet	x 1	
		Audio line-in	x 3	
		Composite video	x 1	
		Composite audio	x 1	
		D-sub	x 3	
		Type A HDMI	x 3	
		Type A (USB Playback)	x 4	
		RS232	x 1	
		LAN	x 1	
	Output	D-sub	x 1	
		Earphone	x 1	
		COAX	x 1	
	Others	NFC Reader / Writer	x 1	
		IR receiver	x 1	
	Mechanical	Dimensions (W x H x D) (without packing / with packing)	1665 x 1015 x 98 mm / 1803 x 1160 x 243 mm	
		Net Weight / Gross Weight	55kg / 68kg	
	Power	Power supply	AC100 to 240V, 50 to 60 Hz	
Power Consumption		222W		
OSD	On-Screen Display Languages	EN / EF / SP / EP / CN / TC / GM / DT / PL / RS / CZ / DN / SW / IT / RM / FN / NG / GK / TK / AB / JP (21 Languages)		
Accessories	Standard	Remote Control w/ Battery	x 1	
		Power Cord (by region)	x 4	
		Touch pen	x 2 (NFC)	
		Quick Start Guide	x 1	
		Audio cable	x 1	
		Touch cable (USB to USB)	x 1	
		VGA (D-sub 15pin) cable	x 1	

Product Specifications

Wallmount

