

Procure



**Powered By Choice,
Driven By You.**



65WR6CE

65" ADVANCED INTERACTIVE DISPLAY

Hisense Interactive Display solutions deliver unrivalled performance and market leading value. Combining the power of a digital display, tablet, electronic whiteboard and video conference device, Hisense delivers the ultimate all-in-one display solution. Superior processors and the latest touch technology provide best-in-class user experiences while seamless wireless integration makes collaboration both simple and engaging. The 65WR6CE features an optical bonded display for an enhanced touch experience, a wireless live presentation link to compatible Hisense displays and NFC integration.

Highlights



4K Ultra HD

The 4K Ultra HD picture quality ensures perfect colour and rich details in all possible surroundings. In addition to the 4K screen as always, we bring 4K UI for WR6CE. With 4K UI, we can make the most of this clear, bright, eye-protective screen for a more beautiful display.



Anti-Glare

Optical technology diffuses mirror-like reflections and bright lights to help keep what's on your screen clear and visible.



Comfortable viewing

Low blue light and full frequency DC dimming from hardware, bring the ultimate comfort viewing experience.



Settings menu lock

Now you can set a separate password lock for the settings menu to prevent children from accidentally touching it.



Screen Transmission

The WR6CE interactive digital board can wirelessly connect with two or more auxiliary screen devices. Near-Field Communication (NFC) touch transmission and A&C screen transmission simplify this process.



Wide viewing angle

The extra wide 178° viewing angle is a perfect fit for classrooms and presentations, with perfect colour and rich details in all possible surroundings.




Collaborative interaction

The touchscreen recognizes up to 20 touches at once which is ideal for simultaneous use by meeting participants.



Newly upgraded whiteboard

Add sticky note function to jot down your thoughts. You can view all the pages through the page list, adjust the page order, and copy content across pages.

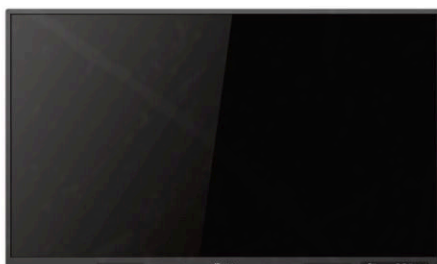

Specifications

Interactive Display Panel

LCD Size	65"
Backlight Type	D-LED
Resolution	3840x2160(pixels)
Brightness	350cd/m ² (typ.)
Contrast Ratio	1200:1(typ.)
Response Time	8ms (typ.)
Refreshing Frequency	60Hz
Viewing Angle	178°(H) / 178°(V)
Lifetime	50,000 hrs (min.)
Color Gamut(X% NTSC)	72%
Display Colors	1.07B(10bit)

System

RAM	4GB
ROM	64GB
OS	Android 13.0
Language	Chinese, English, Polish, German, French, Italian, Spanish, Finnish, Norwegian, Swedish, Thai, Indonesian, Japanese

Speaker

Audio Output Power	2x15W
--------------------	-------

Power

Power Requirements	AC 100 V ~ 240 V, 50/60 Hz
Power Consumption Without OPS	210W
Standby Consumption	<0.5W

Connectivity

Wi-Fi	IEEE 802.11a/b/g/n/ac/ax(2.4G and 5G) IEEE 802.11a/b/g/n/ac(2.4G and 5G)
Bluetooth	BT5.1
Input	HDMI(2.0) IN x3 VGA IN x1 Mic IN x1 OPS (Optional) x1 LAN x2 (1000baseT RJ45in+RJ45out) USB2.0 x1 USB3.0 x4 Type-C x1 (Support PD 65W) Touch x2 Audio In x1 RS-232 In x1
Output	HDMI Out x1 S/PDIF Out x1 Audio Out x1

Certification

Standard Certification	CB/CE/ERP/South Africa Efficiency/ tUUVus/CEC/FCC/ICASA/Energy Star
------------------------	--

Touch

Sensing Type	Infrared Touch Frame
Surface Protection	Anti-Glare Glass
Infrared Touch	≤20 points
Touch Accuracy	90%(±1mm)
Theory Clicks	Unlimited
Minimum Touch Object	≥2mm
Windows 10/8/7,Android	Multi Touch

Physical

Housing Color	Black
Product Size (W x H x D)	1488 x 898 x 95mm 58.6 x 35.4 x 3.7inch
Package Size (W x H x D)	1720 x 240 x 1110mm 67.7 x 43.3 x 9.4inch
Net Weight	33kg / 72.77lbs
Packed Weight	43.9kg / 96.80lbs
VESA	600x400mm, 4-M8 screw

What's in the box

Basic	User Manual x 1
	Pen x 2
	Remote Control x 1
	Wireless Cast x 1 (Optional)
	Power Cable x 1
	Battery x 2
	Wall Mount Bracket x 1

Dimensions

65" 1488 x 898 x 95 mm / 58.6 x 35.4 x 3.7 inch
33 kg / 72.77 lbs

