Procure

Powered By Choice, Driven By You.

Engaging Presentation

Interactive Learning

TRUTOUCH *UB* Series

Product Specifications

Model Name	TT-6516UB	TT-7516UB	TT-8616UB
Active Screen Size ("inch)	65"	75"	86"
Display Backlight	LED		
Display Area	1428.5 x 803.5mm	1650 x 973mm	1895 x 1066mm
Display Ratio	16：9		
Resolution	3840 x 2160 Pixel (4K)		
Display Colors	10 bit		
LCD Brightness	370 cd/m2		
Contrast Ratio (Typical)	4000:1		
Response Time (Typical)	8 ms		
Viewing Angle	178°		
Life Time (working hours)	Minimum 30,000 hours		
Power Consumption Max.	Maximum <220W	Maximum <350W	Maximum <450W
Touch Surface Material	Tempered glass		
Touch Surface Technology	Anti-Glare glass		
Transparency	>88%		
Touch Sensor	Infrared Touch		
Touch Points	10 Points under Windows system		
Touch Screen Writing Tools	Nano Pen (>6mm width) included or Finger		
Cursor Speed	100 Point/s		
Positioning Accuracy	5 mm		
Communication Interface	USB-B		
Speaker Position	Forward		
Speaker Max.Power Output	15W x 2		
Transmission Range	5M		
Android System	Version 5.0.1		
Installation Method (optional	Wall-mounted / Floor Stand		
Outline Dimension	1544.03 x 939.1 x 99.1 mm	1768 x 1066 x 114 mm	2019 x 1209 x 116 mm
Packing Dimension	1705 x 1080 x 265 mm	1923 x 1215 x 280 mm	2180 x 1340 x 340 mm
Net Weight	43 KG	57 KG	72 KG
Gross Weight	57 KG	77 KG	96 KG

Easily Write and Erase   Annotation   Record   Handwriting   Rugged   Easy of Use   Import Video   Android   HDMI
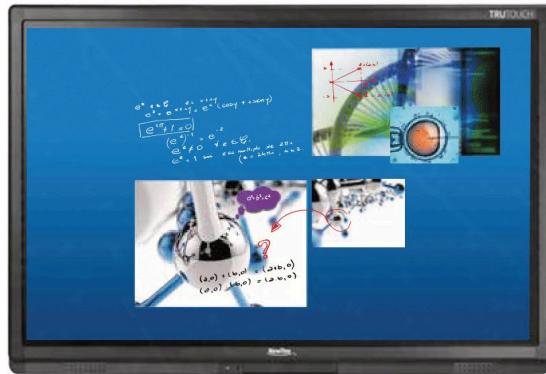
Product Advanced Features

Connectivity

Share everything by the way you like to use, not only physical cable to input but also wireless solution.

Internal PC	Screen Projection &Touch Control	Object Projection	Wireless Presentation
OPS (Optional)	PC/Mac	Document Camera	TRUCAST (Optional)

Zero Training Easy Operation

With its simple user interface no training needed to learn TRUTOUCH. Simply following the icon and use TRUTOUCH basic function without any difficulty.

Android System Tool Bar

Whiteboard Function Bar

Input Source Selection

Source

Android | OPS | HDMI1 | HDMI2 | HDMI3

HDMI4 | DP | VGA | AV

Excellent 4K Resolution

Responsive 10 points Touch

TRUTOUCH supports multi-touch to 10 points. Creating the interaction environment for conference room.

Support Multiple Input & Output

TRUTOUCH allows users to share information by their own devices.
You may find all of the major I/O ports on TRUTOUCH front sides and rear sides as well.

VGA	HDMI	TOUCH-USB	Micro SD	USB	AUDIO
IN x 1	IN x 4, Out x 1	x 4	IN x 1	Android x 2 PC x 2	Audio In (VGA) x1 Audio Out x 1 Earphone x1

MIC	DisplayTouch	RS232	LAN	AV-IN
IN x 1	IN x 1	x 1	x 2	x 1

Antiglare Glass

Integrated Sound Bar

Plug & Play