
Procure




Powered By Choice, Driven By You.

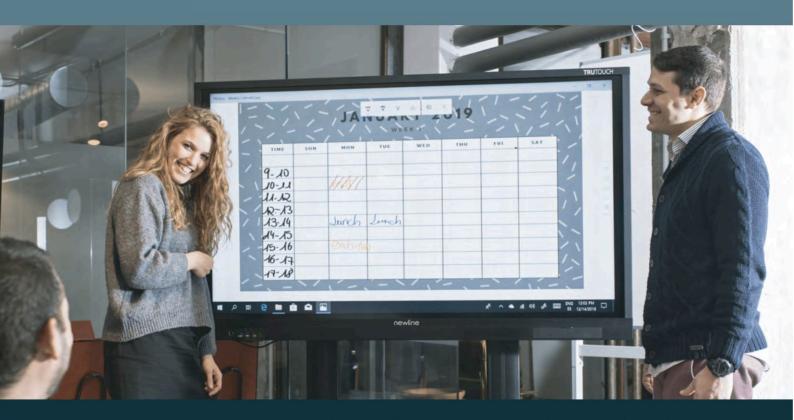

THE SMOOTHEST, MOST INTUITIVE TOUCH EXPERIENCE

Communication and collaboration made easy for all teams











86"



Superior Touch





Intuitive User Interface



Go Wireless














UNPARALLELED WRITING EXPERIENCE

Object Recognition and advanced IR touch technology give you the smoothest, most intuitive and responsive writing experience available. Write with a thin pen, erase with your palm, and set memory functions. Collaborate easily and comfortably without limitations.



Ultra-wide 178° viewing angle for clear, robust images no matter where you sit in the room. Optical bonding brings an improved visual experience with accurate touch and a sturdier display. The benefits are endless.





TRULY ENGAGING COLLABORATION

A stunning, multi-functional display to make your meetings and presentations more engaging than ever. The VN Series enables BYOD so you can share and broadcast personal device screens wirelessly and hassle-free. Enhance productivity and maximize efficiency with the VN Series.



Present wirelessly from any network with a single click. Share video, links, and files from any device.



Broadcast content or present wirelessly from a personal device, and invite up to 200 participants to connect from their own.

DISPLAY MANAGEMENT

Centrally manage and deploy apps, configure settings, use digital signage and broadcast messages to all your Newline displays.

LAUNCH CONTROL

Enable the proximity sensor to quickly launch your calendar, meetings and preferred on-screen applications as soon as you reach the display.

Built-In Apps

Everything you need to schedule meetings, manage e-mails, save and open files with the cloud and work on documents, all with Newline's built-in apps. Collaborate locally











File Commander

APPLICATIONS

MEETING ROOM



HIGHER EDUCATION



HUDDLE SPACE



TRAINING



SPECIFICATIONS

Model	TT-6518VN	TT-7518VN	TT-8618VN	
		Display		
Display Backlight		LED		
Display Area	1429.5 x 804.5 mm	1651 x 929 mm	1897 x 1066 mm	
Active Screen Size ("inch)	65"	75"	86"	
Display Ratio		16:9		
Resolution		3840 × 2160 Pixels		
Display Colors	8 bit + FRC (1.07 billion) colors 10-bit(D), 1.07 Billion colors			
LCD Brightness(After Glass)	0 5% - 1 110 (1.07	370 nit	To Bit(B), They Billion delete	
Contrast Ratio (Dynamic)		4000:1		
Viewing Angle		178°		
Life time (working hours/day)		≥ 50,000 hours		
Response Time		8ms		
		Speaker		
Speaker Position		Front facing		
Transmission Range	5m			
Speaker Max.Power Output		15 W × 2		
opeaker Max.Fower Output		TOTAL CONTRACTOR OF THE CONTRA		
- 1	M	Power	Marian - 150 W	
Power Consumption	Maximum ≦250 W Standby Mode ≦ 0.5 W	Maximum ≤ 400 W Standby Mode ≤ 0.5 W	Maximum ≤ 450 W Standby Mode ≤ 0.5 W	
Working Voltage	Stariday Wode = 0.5 W	AC100-240V; 50/60 Hz	Startaby Wode = 0.5 W	
vvoiking voitage	Touch			
Touch Surface Technology	Δη	iti-Glare, tempered glass with Optical bondin	a	
Touch Surface Hardness	7.0	> 7H	9	
Touch Sensor	> 7H Infrared touch			
Touch Points		Up to 20 Points		
Touch Screen Writing Tools		Stylus, Finger		
Communication Interface		USB		
Communication interrese	Transportation/ Storage			
		Section 1 Control Cont		
Storage Temperature/ Humidity	15			
Storage Temperature/ Humidity		°C ~ 55°C / 20 ~ 90% RH (Non coagulation)		
Working Temperature/ Humidity		$^{\circ}$ C ~ 55 $^{\circ}$ C / 20 ~ 90% RH (Non coagulation) C ~ 40 $^{\circ}$ C / 20 ~ 80% RH (Non coagulation)		
Working Temperature/ Humidity Mounting Options	0%	$^{\circ}$ C \sim 55 $^{\circ}$ C / 20 \sim 90% RH (Non coagulation) C \sim 40 $^{\circ}$ C / 20 \sim 80% RH (Non coagulation) Wall-mount or Mobile Stand	2010 v 1211 v 104 mm	
Working Temperature/ Humidity Mounting Options Outline Dimensions	0° 1547 × 944 × 89 mm	°C ~ 55°C / 20 ~ 90% RH (Non coagulation) C ~ 40°C / 20 ~ 80% RH (Non coagulation) Wall-mount or Mobile Stand 1771 × 1071 × 108 mm	2018 × 1211 × 104 mm	
Working Temperature/ Humidity Mounting Options Outline Dimensions Packing Dimensions	0° 1547 × 944 × 89 mm 1670 × 1056 × 221 mm	°C ~ 55°C / 20 ~ 90% RH (Non coagulation) C ~ 40°C / 20 ~ 80% RH (Non coagulation) Wall-mount or Mobile Stand 1771 × 1071 × 108 mm 1894 × 1193 × 247 mm	2170 × 1345 × 275 mm	
Working Temperature/ Humidity Mounting Options Outline Dimensions Packing Dimensions Net Weight	0° 1547 × 944 × 89 mm 1670 × 1056 × 221 mm 39 kg	°C ~ 55°C / 20 ~ 90% RH (Non coagulation) C ~ 40°C / 20 ~ 80% RH (Non coagulation) Wall-mount or Mobile Stand 1771 × 1071 × 108 mm 1894 × 1193 × 247 mm 50.5 kg	2170 × 1345 × 275 mm 62.5 kg	
Working Temperature/ Humidity Mounting Options Outline Dimensions Packing Dimensions Net Weight Gross Weight	0° 1547 × 944 × 89 mm 1670 × 1056 × 221 mm 39 kg 53 ± 2 kg	$^{\circ}$ C \sim 55 $^{\circ}$ C / 20 \sim 90% RH (Non coagulation) C \sim 40 $^{\circ}$ C / 20 \sim 80% RH (Non coagulation) Wall-mount or Mobile Stand 1771 \times 1071 \times 108 mm 1894 \times 1193 \times 247 mm 50.5 kg 68 \pm 2 kg	2170 × 1345 × 275 mm 62.5 kg 81.5 ± 2 kg	
Working Temperature/ Humidity Mounting Options Outline Dimensions Packing Dimensions Net Weight	0° 1547 × 944 × 89 mm 1670 × 1056 × 221 mm 39 kg	°C ~ 55°C / 20 ~ 90% RH (Non coagulation) C ~ 40°C / 20 ~ 80% RH (Non coagulation) Wall-mount or Mobile Stand 1771 × 1071 × 108 mm 1894 × 1193 × 247 mm 50.5 kg 68 ± 2 kg	2170 × 1345 × 275 mm 62.5 kg 81.5 ± 2 kg	
Working Temperature/ Humidity Mounting Options Outline Dimensions Packing Dimensions Net Weight Gross Weight VESA Mount installation position	0° 1547 × 944 × 89 mm 1670 × 1056 × 221 mm 39 kg 53 ± 2 kg 600 × 400 mm	°C ~ 55°C / 20 ~ 90% RH (Non coagulation) C ~ 40°C / 20 ~ 80% RH (Non coagulation) Wall-mount or Mobile Stand 1771 × 1071 × 108 mm 1894 × 1193 × 247 mm 50.5 kg 68 ± 2 kg 800 × 4	2170 × 1345 × 275 mm 62.5 kg 81.5 ± 2 kg 00 mm	
Working Temperature/ Humidity Mounting Options Outline Dimensions Packing Dimensions Net Weight Gross Weight VESA Mount installation position Front Interface Inputs	0° 1547 × 944 × 89 mm 1670 × 1056 × 221 mm 39 kg 53 ± 2 kg 600 × 400 mm	**C ~ 55°C / 20 ~ 90% RH (Non coagulation) C ~ 40°C / 20 ~ 80% RH (Non coagulation) Wall-mount or Mobile Stand 1771 × 1071 × 108 mm 1894 × 1193 × 247 mm 50.5 kg 68 ± 2 kg 800 × 4 Ports **AK@30Hz) × 1, USB (Touch) × 1, USB 2.0 (Pu	2170 × 1345 × 275 mm 62.5 kg 81.5 ± 2 kg 00 mm	
Working Temperature/ Humidity Mounting Options Outline Dimensions Packing Dimensions Net Weight Gross Weight VESA Mount installation position Front Interface Inputs AV Inputs	0° 1547 × 944 × 89 mm 1670 × 1056 × 221 mm 39 kg 53 ± 2 kg 600 × 400 mm HDMI 1.4 (HDMI out (Support 4k@60H	"C ~ 55°C / 20 ~ 90% RH (Non coagulation) C ~ 40°C / 20 ~ 80% RH (Non coagulation) Wall-mount or Mobile Stand 1771 × 1071 × 108 mm 1894 × 1193 × 247 mm 50.5 kg 68 ± 2 kg 800 × 4 Ports (4K@30Hz) × 1, USB (Touch) × 1, USB 2.0 (Pt	2170 × 1345 × 275 mm 62.5 kg 81.5 ± 2 kg 00 mm ublic) x 2 Line Out x 1, SPDIF out x 1	
Working Temperature/ Humidity Mounting Options Outline Dimensions Packing Dimensions Net Weight Gross Weight VESA Mount installation position Front Interface Inputs AV Inputs AV Outputs	0° 1547 × 944 × 89 mm 1670 × 1056 × 221 mm 39 kg 53 ± 2 kg 600 × 400 mm HDMI 1.4 (HDMI out (Support 4k@60H HDMI out (Support 3840x2160@60F	"C ~ 55°C / 20 ~ 90% RH (Non coagulation) C ~ 40°C / 20 ~ 80% RH (Non coagulation) Wall-mount or Mobile Stand 1771 × 1071 × 108 mm 1894 × 1193 × 247 mm 50.5 kg 68 ± 2 kg 800 × 4 Ports (4K@30Hz) × 1, USB (Touch) × 1, USB 2.0 (Pt. Iz, 1920×1080@60Hz, 720×480@60Hz) × 1, It. Iy. Iy. Iy. Iy. Iy. Iy. Iy. Iy. Iy. Iy	2170 × 1345 × 275 mm 62.5 kg 81.5 ± 2 kg 00 mm ublic) x 2 ine Out x 1, SPDIF out x 1 ine Out(earphone) *1, SPDIF out*1	
Working Temperature/ Humidity Mounting Options Outline Dimensions Packing Dimensions Net Weight Gross Weight VESA Mount installation position Front Interface Inputs AV Inputs	0° 1547 × 944 × 89 mm 1670 × 1056 × 221 mm 39 kg 53 ± 2 kg 600 × 400 mm HDMI 1.4 (HDMI out (Support 4k@60H HDMI out (Support 3840x2160@60k) USB 2.0 (Public) ×	"C ~ 55°C / 20 ~ 90% RH (Non coagulation) C ~ 40°C / 20 ~ 80% RH (Non coagulation) Wall-mount or Mobile Stand 1771 × 1071 × 108 mm 1894 × 1193 × 247 mm 50.5 kg 68 ± 2 kg 800 × 4 Ports (4K@30Hz) × 1, USB (Touch) × 1, USB 2.0 (Pt	2170 × 1345 × 275 mm 62.5 kg 81.5 ± 2 kg 00 mm ublic) × 2 Line Out × 1, SPDIF out × 1 Line Out(earphone) *1, SPDIF out*1 0 × 1, RS232 × 1,	
Working Temperature/ Humidity Mounting Options Outline Dimensions Packing Dimensions Net Weight Gross Weight VESA Mount installation position Front Interface Inputs AV Inputs AV Outputs	0° 1547 × 944 × 89 mm 1670 × 1056 × 221 mm 39 kg 53 ± 2 kg 600 × 400 mm HDMI 1.4 (HDMI out (Support 4k@60H HDMI out (Support 3840x2160@60k) USB 2.0 (Public) ×	C ~ 55°C / 20 ~ 90% RH (Non coagulation) C ~ 40°C / 20 ~ 80% RH (Non coagulation) Wall-mount or Mobile Stand 1771 × 1071 × 108 mm 1894 × 1193 × 247 mm 50.5 kg 68 ± 2 kg 800 × 4 Ports 4K(@30Hz) × 1, USB (Touch) × 1, USB 2.0 (Put, 1920x1080@60Hz, 720x480@60Hz) × 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 2, 1, 1, 1, 2, 1, 2, 1, 2, 2, 1, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2,	2170 × 1345 × 275 mm 62.5 kg 81.5 ± 2 kg 00 mm ublic) × 2 Line Out × 1, SPDIF out × 1 Line Out(earphone) *1, SPDIF out*1 0 × 1, RS232 × 1,	
Working Temperature/ Humidity Mounting Options Outline Dimensions Packing Dimensions Net Weight Gross Weight VESA Mount installation position Front Interface Inputs AV Inputs AV Outputs	0° 1547 × 944 × 89 mm 1670 × 1056 × 221 mm 39 kg 53 ± 2 kg 600 × 400 mm HDMI 1.4 (HDMI out (Support 4k@60H HDMI out (Support 3840x2160@60k) USB 2.0 (Public) ×	C ~ 55°C / 20 ~ 90% RH (Non coagulation) C ~ 40°C / 20 ~ 80% RH (Non coagulation) Wall-mount or Mobile Stand 1771 × 1071 × 108 mm 1894 × 1193 × 247 mm 50.5 kg 68 ± 2 kg 800 × 4 Ports 4K@30Hz) × 1, USB (Touch) × 1, USB 2.0 (Pt. z, 1920x1080@60Hz, 720x480@60Hz) × 1, It. JUSB 3.0 (Public) × 1, USB 2.0 (Embedded in/Out), OPS Slots (4K@60Hz) × 1, US 5.0 (Embedded in/Out), OPS Slots (4K@60Hz) × 1, DC 5V-26	2170 × 1345 × 275 mm 62.5 kg 81.5 ± 2 kg 00 mm ublic) × 2 Line Out × 1, SPDIF out × 1 Line Out(earphone) *1, SPDIF out*1 0 × 1, RS232 × 1,	
Working Temperature/ Humidity Mounting Options Outline Dimensions Packing Dimensions Net Weight Gross Weight VESA Mount installation position Front Interface Inputs AV Inputs AV Outputs Other	0° 1547 × 944 × 89 mm 1670 × 1056 × 221 mm 39 kg 53 ± 2 kg 600 × 400 mm HDMI 1.4 (HDMI out (Support 4k@60H HDMI out (Support 3840x2160@60k) USB 2.0 (Public) ×	C ~ 55°C / 20 ~ 90% RH (Non coagulation) C ~ 40°C / 20 ~ 80% RH (Non coagulation) Wall-mount or Mobile Stand 1771 × 1071 × 108 mm 1894 × 1193 × 247 mm 50.5 kg 68 ± 2 kg 800 × 4 Ports 4K(@30Hz) × 1, USB (Touch) × 1, USB 2.0 (Put, 1920×1080@60Hz, 720×480@60Hz) × 1, USB 1, USB 2.0 (Put, 1920×1080@60Hz, 720×480@60Hz) × 1, USB 3.0 (Public) × 1, USB 2.0 (Embedded (in/Out), OPS Slots (4K(@60Hz) × 1, DC 5V-24) Embedded Operating System	2170 × 1345 × 275 mm 62.5 kg 81.5 ± 2 kg 00 mm ublic) × 2 Line Out × 1, SPDIF out × 1 Line Out(earphone) *1, SPDIF out*1 0 × 1, RS232 × 1,	
Working Temperature/ Humidity Mounting Options Outline Dimensions Packing Dimensions Net Weight Gross Weight VESA Mount installation position Front Interface Inputs AV Inputs AV Outputs Other	0° 1547 × 944 × 89 mm 1670 × 1056 × 221 mm 39 kg 53 ± 2 kg 600 × 400 mm HDMI 1.4 (HDMI out (Support 4k@60H HDMI out (Support 3840x2160@60k) USB 2.0 (Public) ×	C ~ 55°C / 20 ~ 90% RH (Non coagulation) C ~ 40°C / 20 ~ 80% RH (Non coagulation) Wall-mount or Mobile Stand 1771 × 1071 × 108 mm 1894 × 1193 × 247 mm 50.5 kg 68 ± 2 kg 800 × 4 Ports 4K(@30Hz) × 1, USB (Touch) × 1, USB 2.0 (Pt. z, 1920x1080@60Hz, 720x480@60Hz) × 1, 1, 1, 1, 1, 1, 1, 1, 1, 2, 1, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2,	2170 × 1345 × 275 mm 62.5 kg 81.5 ± 2 kg 00 mm ublic) × 2 Line Out × 1, SPDIF out × 1 Line Out(earphone) *1, SPDIF out*1 0 × 1, RS232 × 1,	
Working Temperature/ Humidity Mounting Options Outline Dimensions Packing Dimensions Net Weight Gross Weight VESA Mount installation position Front Interface Inputs AV Inputs AV Outputs Other CPU GPU	0° 1547 × 944 × 89 mm 1670 × 1056 × 221 mm 39 kg 53 ± 2 kg 600 × 400 mm HDMI 1.4 (HDMI out (Support 4k@60H HDMI out (Support 3840x2160@60k) USB 2.0 (Public) ×	C ~ 55°C / 20 ~ 90% RH (Non coagulation) C ~ 40°C / 20 ~ 80% RH (Non coagulation) Wall-mount or Mobile Stand 1771 × 1071 × 108 mm 1894 × 1193 × 247 mm 50.5 kg 68 ± 2 kg 800 × 4 Ports (4K@30Hz) × 1, USB (Touch) × 1, USB 2.0 (Pt. Iz, 1920x1080@60Hz, 720x480@60Hz) × 1, I 1-z, 1920x1080@60Hz, 720x480@60Hz) × 1, I 1, USB 3.0 (Public) × 1, USB 2.0 (Embedded in/Out), OPS Slots (4K@60Hz) × 1, DC 5V-2A Embedded Operating System ARM Cortex A53 4 × core 1.4GHz ARM Mali450 MP4 6-cores 600MHz	2170 × 1345 × 275 mm 62.5 kg 81.5 ± 2 kg 00 mm ublic) × 2 Line Out × 1, SPDIF out × 1 Line Out(earphone) *1, SPDIF out*1 0 × 1, RS232 × 1,	
Working Temperature/ Humidity Mounting Options Outline Dimensions Packing Dimensions Net Weight Gross Weight VESA Mount installation position Front Interface Inputs AV Inputs AV Outputs Other CPU GPU RAM	0° 1547 × 944 × 89 mm 1670 × 1056 × 221 mm 39 kg 53 ± 2 kg 600 × 400 mm HDMI 1.4 (HDMI out (Support 4k@60H HDMI out (Support 3840x2160@60k) USB 2.0 (Public) ×	C ~ 55°C / 20 ~ 90% RH (Non coagulation) C ~ 40°C / 20 ~ 80% RH (Non coagulation) Wall-mount or Mobile Stand 1771 × 1071 × 108 mm 1894 × 1193 × 247 mm 50.5 kg 68 ± 2 kg 800 × 4 Ports (4K@30Hz) × 1, USB (Touch) × 1, USB 2.0 (Pt iz, 1920×1080@60Hz, 720×480@60Hz) × 1, i+z, 1920×1080@60Hz, 720×480@60Hz, 720×480@60Hz) × 1, i+z, 1920×1080@60Hz, 720×480@60Hz, 720×480@60H	2170 × 1345 × 275 mm 62.5 kg 81.5 ± 2 kg 00 mm ublic) × 2 Line Out × 1, SPDIF out × 1 Line Out(earphone) *1, SPDIF out*1 0 × 1, RS232 × 1,	
Working Temperature/ Humidity Mounting Options Outline Dimensions Packing Dimensions Net Weight Gross Weight VESA Mount installation position Front Interface Inputs AV Inputs AV Outputs Other CPU GPU RAM ROM	0° 1547 × 944 × 89 mm 1670 × 1056 × 221 mm 39 kg 53 ± 2 kg 600 × 400 mm HDMI 1.4 (HDMI out (Support 4k@60H HDMI out (Support 3840x2160@60k) USB 2.0 (Public) ×	C ~ 55°C / 20 ~ 90% RH (Non coagulation) C ~ 40°C / 20 ~ 80% RH (Non coagulation) Wall-mount or Mobile Stand 1771 × 1071 × 108 mm 1894 × 1193 × 247 mm 50.5 kg 68 ± 2 kg 800 × 4 Ports 4K(@30Hz) × 1, USB (Touch) × 1, USB 2.0 (Pt. 2), 1920×1080 (60Hz), 720×480 (60Hz) × 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1,	2170 × 1345 × 275 mm 62.5 kg 81.5 ± 2 kg 00 mm ublic) × 2 Line Out × 1, SPDIF out × 1 Line Out(earphone) *1, SPDIF out*1 0 × 1, RS232 × 1,	
Working Temperature/ Humidity Mounting Options Outline Dimensions Packing Dimensions Net Weight Gross Weight VESA Mount installation position Front Interface Inputs AV Inputs AV Outputs Other CPU GPU RAM ROM	0° 1547 × 944 × 89 mm 1670 × 1056 × 221 mm 39 kg 53 ± 2 kg 600 × 400 mm HDMI 1.4 (HDMI out (Support 4k@60H HDMI out (Support 3840x2160@60k) USB 2.0 (Public) ×	C ~ 55°C / 20 ~ 90% RH (Non coagulation) C ~ 40°C / 20 ~ 80% RH (Non coagulation) Wall-mount or Mobile Stand 1771 × 1071 × 108 mm 1894 × 1193 × 247 mm 50.5 kg 68 ± 2 kg 800 × 4 Ports 4K(@30Hz) × 1, USB (Touch) × 1, USB 2.0 (Pt. 12, 1920×1080(@60Hz, 720×480(@60Hz) × 1, 14z, 1920×1080(@60Hz, 720×480(@60Hz)*), Lt. 1, USB 3.0 (Public) × 1, USB 2.0 (Embedded (in/Out), OPS Slots (4K(@60Hz) × 1, DC 5V-24 Embedded Operating System ARM Cortex A53 4 × core 1.4GHz ARM Mali450 MP4 6-cores 600MHz 2GB 8GB 5.0.1	2170 × 1345 × 275 mm 62.5 kg 81.5 ± 2 kg 00 mm ublic) × 2 Line Out × 1, SPDIF out × 1 Line Out(earphone) *1, SPDIF out*1 0 × 1, RS232 × 1,	
Working Temperature/ Humidity Mounting Options Outline Dimensions Packing Dimensions Net Weight Gross Weight VESA Mount installation position Front Interface Inputs AV Inputs AV Outputs Other CPU GPU RAM ROM Android Version	0° 1547 × 944 × 89 mm 1670 × 1056 × 221 mm 39 kg 53 ± 2 kg 600 × 400 mm HDMI 1.4 (HDMI out (Support 4k@60H HDMI out (Support 3840x2160@60F USB 2.0 (Public) × RJ45 × 2 (C ~ 55°C / 20 ~ 90% RH (Non coagulation) C ~ 40°C / 20 ~ 80% RH (Non coagulation) Wall-mount or Mobile Stand 1771 × 1071 × 108 mm 1894 × 1193 × 247 mm 50.5 kg 68 ± 2 kg 800 × 4 Ports 4K(@30Hz) × 1, USB (Touch) × 1, USB 2.0 (Pt. 2, 1920×1080(@60Hz, 720×480(@60Hz) × 1, Hz., 1920×1080(@60Hz, 720×480(@60Hz) × 1, LT., USB 3.0 (Public) × 1, USB 2.0 (Embedded (in/Out), OPS Slots (4K(@60Hz) × 1, DC 5V-24 Embedded Operating System ARM Cortex A53 4 × core 1.4GHz ARM Mali450 MP4 6-cores 600MHz 2GB 8GB 5.0.1 Other Optional	2170 × 1345 × 275 mm 62.5 kg 81.5 ± 2 kg 00 mm ublic) × 2 Line Out × 1, SPDIF out × 1 Line Out(earphone) *1, SPDIF out*1 0 × 1, RS232 × 1,	
Working Temperature/ Humidity Mounting Options Outline Dimensions Packing Dimensions Net Weight Gross Weight VESA Mount installation position Front Interface Inputs AV Inputs AV Outputs Other CPU GPU RAM ROM Android Version OPS PC WIFI dongle	0° 1547 × 944 × 89 mm 1670 × 1056 × 221 mm 39 kg 53 ± 2 kg 600 × 400 mm HDMI 1.4 (HDMI out (Support 4k@60H HDMI out (Support 3840x2160@60F USB 2.0 (Public) × RJ45 × 2 (**C ~ 55°C / 20 ~ 90% RH (Non coagulation) C ~ 40°C / 20 ~ 80% RH (Non coagulation) Wall-mount or Mobile Stand 1771 × 1071 × 108 mm 1894 × 1193 × 247 mm 50.5 kg 68 ± 2 kg 800 × 4 **Ports** **AK@30Hz) × 1, USB (Touch) × 1, USB 2.0 (Pt	2170 × 1345 × 275 mm 62.5 kg 81.5 ± 2 kg 00 mm ublic) × 2 Line Out × 1, SPDIF out × 1 Line Out(earphone) *1, SPDIF out*1 0 × 1, RS232 × 1,	
Working Temperature/ Humidity Mounting Options Outline Dimensions Packing Dimensions Net Weight Gross Weight VESA Mount installation position Front Interface Inputs AV Inputs AV Outputs Other CPU GPU RAM ROM Android Version OPS PC WIFI dongle Intelligent thermo protector	0° 1547 × 944 × 89 mm 1670 × 1056 × 221 mm 39 kg 53 ± 2 kg 600 × 400 mm HDMI 1.4 (HDMI out (Support 4k@60H HDMI out (Support 3840x2160@60F USB 2.0 (Public) × RJ45 × 2 (PC ~ 55°C / 20 ~ 90% RH (Non coagulation) C ~ 40°C / 20 ~ 80% RH (Non coagulation) Wall-mount or Mobile Stand 1771 × 1071 × 108 mm 1894 × 1193 × 247 mm 50.5 kg 68 ± 2 kg 800 × 4 Ports 4K(@30Hz) × 1, USB (Touch) × 1, USB 2.0 (Puz, 1920x1080@60Hz, 720x480@60Hz) × 1, Idz, 1920x1080@60Hz, 720x480@60Hz) × 1, Idz, 1920x1080@60Hz, 720x480@60Hz) × 1, Idz, 1920x1080@60Hz, 720x480@60Hz) × 1, DC 5V-26 Embedded Operating System ARM Cortex A53 4 × core 1.4GHz ARM Mali450 MP4 6-cores 600MHz 2GB 8GB 5.0.1 Other Optional ES, 802.11 a/b/g/n/ac (2.4G/5G Dual-band) YES	2170 × 1345 × 275 mm 62.5 kg 81.5 ± 2 kg 00 mm ublic) × 2 Line Out × 1, SPDIF out × 1 Line Out(earphone) *1, SPDIF out*1) × 1, RS232 × 1,	
Working Temperature/ Humidity Mounting Options Outline Dimensions Packing Dimensions Net Weight Gross Weight VESA Mount installation position Front Interface Inputs AV Inputs AV Outputs Other CPU GPU RAM ROM Android Version OPS PC WIFI dongle	0° 1547 × 944 × 89 mm 1670 × 1056 × 221 mm 39 kg 53 ± 2 kg 600 × 400 mm HDMI 1.4 (HDMI out (Support 4k@60H HDMI out (Support 3840x2160@60H USB 2.0 (Public) x RJ45 × 2 (**C ~ 55°C / 20 ~ 90% RH (Non coagulation) C ~ 40°C / 20 ~ 80% RH (Non coagulation) Wall-mount or Mobile Stand 1771 × 1071 × 108 mm 1894 × 1193 × 247 mm 50.5 kg 68 ± 2 kg 800 × 4 **Ports** **AK@30Hz) × 1, USB (Touch) × 1, USB 2.0 (Pt	2170 × 1345 × 275 mm 62.5 kg 81.5 ± 2 kg 00 mm ublic) x 2 ine Out x 1, SPDIF out x 1 ine Out(earphone) *1, SPDIF out*1) x 1, RS232 x 1, out x 1	