Procure



Powered By Choice, Driven By You.

Interactive Display

Flip 3

Imagine a new era of learning

About Samsung Electronics Co., Ltd.

Samsung Electronics Co., Ltd. inspires the world and shapes the future with transformative ideas and technologies. The company is redefining the worlds of TVs, smartphones, wearable devices, tablets, cameras, digital appliances, medical equipment, network systems, and semiconductor and LED solutions. For the latest news, please visit the Samsung Newsroom at news.samsung.com.

Smart Signage

 $For more information\ about\ Samsung\ Smart\ Signage\ WM75A\ Displays,\ visit\ www.samsung.com/business\ or\ www.samsung.com/displaysolutions$

Copyright © 2021 Samsung Electronics Co. Ltd. All rights reserved. Samsung is a registered trademark of Samsung Electronics Co. Ltd. Specifications and designs are subject to change without notice. Non-metric weights and measurements are approximate. All data were deemed correct at time of creation. Samsung is not liable for errors or omissions. All brand, product, service names and logos are trademarks and/or registered trademarks of their respective owners and are hereby recognized and acknowledged.

Samsung Electronics Co., Ltd. 416, Maetan 3-dong, Yeongtong-gu, Suwon-si, Gyeonggi-do 443-772, Korea


2021-03




What is Samsung Flip 3?

Samsung Flip 3 is a powerful education solution that delivers interactive learning experiences. Developed specifically for the education market, Flip 3 provides educators with boundless resources and flexibility to create engaging lessons for a new era of learning. Flip 3 features immersive touchscreen and input technologies, enabling simultaneous multi-user writing to provide increased involvement while learning. To get the most out of Flip 3's powerful hardware, students and teachers can access both trusted, embedded content or preferred third-party software. Samsung's latest technology enables secure environments, while faster hardware increases student engagement. Power seamless learning experiences for everyone with Samsung Flip 3.

How does Samsung Flip 3 transform the classroom?

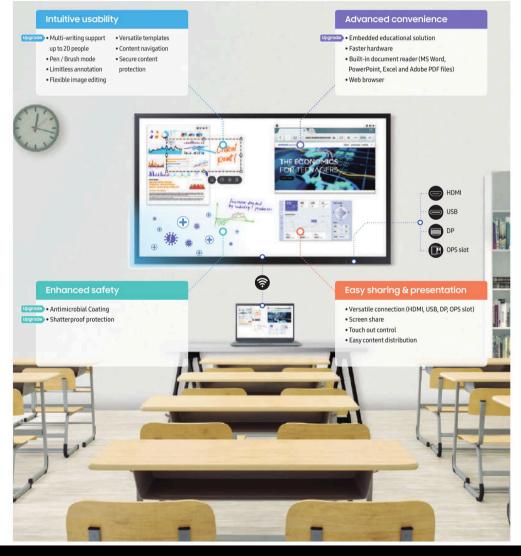

Intuitive usability

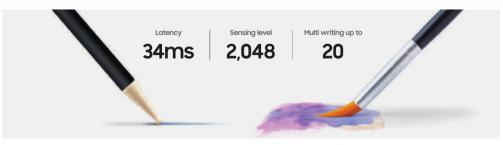

Unlock creativity with immersive touch technology Upgrade

Ideate and create with interactive touchscreen technology. With support for up to 20 inputs at once, sketch out ideas with swift drawing speed at just 34ms of latency or paint with real-world accuracy with 2,048 points of pressure built directly into the display.



Create and solve without limits

Interactions are intuitively built for problem solving and creating. Use any object near you as a stylus to bring your ideas to life. Flip 3 distinguishes between inputs from thin or thick objects to simulate on-screen writing and highlighting. Or simply erase content with your finger or palm.

Enhanced safety



Keep the screen clean Upgrade

Thanks to an Antimicrobial Coating, Samsung Flip 3 inhibits microbial growth to help protect against certain bacteria. This enables teachers and students to stay focused on what's on the screen with peace of mind.



Minimize accidents and risks Upgrade

Samsung understands that accidents happen. To protect students and educators from injury, the Flip 3 screen is wrapped in a proprietary shatterproof film, ensuring the screen stays intact in the event of a break.

- ${\color{red}^{*}} \textbf{To perform its antibacterial function, this product has been treated with the biocidal substance Zinc Pyrithione.} \\$
- * Antibacterial property does not completely protect users against bacteria and provides no protection against viruses including Covid-19.
- * Antimicrobial Coating is on surface of screen only and the effect may vary depending on conditions of use.

 * Antipacterial certification: UL 2282 which is granted when the antipacterial effectiveness is more than 99%.
- (Test method/JIS Z 2801): after inoculation of 0.4cc of liquid with bacterial(Escherichia coli and Staphylococcus aureus) on specimen(5cm x 5cm), a sterillzed film(4cm x 4cm) is adhered and left in a thermo-hygrostat with a relative humidity of 90% or more at 35°C for 24 hours, and then the efficiency of killing of the bacteria is measured / Test agency: FITI Test Research Institute)
- * For further details regarding regional restrictions on the antibacterial function, please refer to each country's Samsung.com website.

Advanced convenience



Explore trusted educational solutions Upgrade

Samsung partnered closely with Boxlight, a leading US education solution, to deliver fully optimized and innovative education software* directly to Flip 3. Now, educators can access Boxlight's extensive catalog of versatile learning content for hassle-free lesson planning.

 ${}^*\!Accessible through a web browser shortcut. Full app availability available through a future software update.\\$

* Requires Boxlight registration and subscription to use this service.



Faster operation for seamless interactions Upgrade

Power faster device interactions with less load time with 20% more memory (RAM). Or download and save more interactive content while enjoying consistent, reliable performance thanks to two times more storage capacity.

*When compared to Samsung Flip 2.



Connect multiple devices with ease

Flip 3 features multiple connectivity options, including USB, HDMI, DP, and OPS, as well as wireless screen sharing, to ensure educators can easily access their content from any device. Flip 3 automatically recognizes plugged-in sources, giving you control of your files and media quickly.

Easy sharing & presentation



Centralize lesson plans and school notifications

Use preferred third-party education solutions and connect to school information systems with the built-in OPS (Open Pluggable Specification) slot. Flip 3 is a centralized source for classroom learning and school-wide notifications such as principal announcements, weather alerts and fire drills.



Connect any device with ease

Flip 3 features multiple connectivity options, including USB, HDMI, DP, and OPS, as well as wireless screen sharing, to ensure educators can easily access their content from any device. Flip 3 automatically recognizes any plugged-in source, giving you control of your files and media quickly.

Specifications

			WM75A
	Diagon	al Size	75*
	Type		New edge, 60Hz
	Resolution		3,840 x 2,160(Landscape)
Panel	Brightness(Typ.)		350cd/m2(Without glass)
Tunct	Display Color		16.7M
	Viewing Angle(H/V)		10.7™ 178 : 178
	Response Time(G-to-G) SpeakerType		6ms(Typ.)
Sound	Speake		Built in speaker(10W x 2CH)
	Input	RGB	N/A
		Video	HDMI 2(rear1, front1), DP1, OPS I/F
		Audio	N/A
		USB	2(For SoC, rear/front), 2(For external 2.0 x 1/3.0 x 1(front))
	Output	RGB	N/A
onnectivity		Video	HDMI1(Screen share in front)
		Audio	1(Stereo mini jack)
		Touch Out	Touch out 2(USB upstream type, front 1, rear 1)
	Internal	Sensor	N/A
	External	Control	Touch input RS232C thru stereo jack, RJ45(For MDC)
	BT/WiFi		Yes(Keyboard/Mouse)
	Туре		IR
	# of Drawing		4 drawing(Internal) 20 drawing(External)
	Touch Pen Type		Passive pen with magnet
	Object Recognition Range		2mm/4mm/8mm/50mm (Brush mode : Dynamic object recognition)
Touch	Haze		8%-12%
	Thickness		3.2T
	Hardness		Heat semi-strengthened glass
	Hardness Additional Film		AG, Hydrophobic coated PET
	Туре		Internal(Main 1ea, OPS1ea)
	Power Supply		AC100~240V 50/60Hz
	PowerConsumption	Max[W/h]	275
Power		Typical[W/h]	115
		Rating[W/h]	250
		Stand-by[W/h]	0.5
		BTU[W/h]	937.75
	Dimension(mm)	Set	1,721 x1,019.3 x 75.2 mm
	(WxHxD)	Package	1,905 x 1,182 x 287 mm
		Set	58.3 kg
	Weight (kg)	Package	71.7 kg
	Color		Charcoal black
1echanical	VESA Mount		400 x 400
Spec	Protection Glass		Yes
	Stand Type		Wall mount
			OPS slot support
	Media Player Option Type		Landscape only
	Rotation		3M/2.4M(US)
	Dawer Cab		
	Power Cab		
	Acces	sory	Power cord, USB upstream cable(2ea), Pen(2ea, Black), OPS box, Waranty/QSG
Operation	Acces Operating Te	sory	Power cord, USB upstream cable(Zea), Pen(Zea, Black), OPS box, Waranty/QSG 0°C−40°C
Operation	Acces Operating Te Humi	sory emperature dity	Power cord, USB upstream cable(Zea), Pen(Zea, Black), OPS box, Waranty/QSG 0°C-40°C 10%-80%, non-condensing
Operation	Acces Operating Te Humi Ke	sory emperature dity y	Power cord, USB upstream cable(Zea), Pen(Zea, Black), OPS box, Waranty/QSG 0°C-40°C 10%-80%, non-condensing Flip app
Operation	Acces Operating Te Humi	sory Imperature dity y ation	Power cord, USB upstream cable(2ea), Pen(2ea, Black), OPS box, Waranty/QSG O°C_40°C 10%−80%, non-condensing Filo app Landscape
Operation	Acces Operating Te Humi Ke Orient	sory mperature dity y ation H/W	Power cord, USB upstream cable(2ea), Pen(2ea, Black), OPS box, Waranty/QSG O°C−40°C 10%−80%, non-condensing Filip app Landscape Touch overlay(IR), Front connectivity, OPS I/F support(w/OPS Box) Built in speaker(10W x 2), WiF/BT module embedded
Operation	Acces Operating Te Humi Ke	sory Imperature dity y ation	Power cord, USB upstream cable(Zea), Pen(Zea, Black), OPS box, Waranty/QSG 0°C~40°C 10%~80%, non-condensing Filip app Landscape Touch overlay(IR), Front connectivity, OPS I/F support(W/OPS Box) Built in speaker(10W x 2), WiFI/BT module embedded Flip S/W
Operation	Acces Operating Te Humi Ke Orient	sory mperature dity y ation H/W	Power cord, USB upstream cable(2ea), Pen(2ea, Black), OPS box, Waranty/QSG O°C−40°C 10%−80%, non-condensing Filip app Landscape Touch overlay(IR), Front connectivity, OPS I/F support(w/OPS Box) Built in speaker(10W x 2), WiF/BT module embedded
Operation	Acces Operating Te Humi Ke Orient	sory Imperature dity y ation H/W S/W Platform Processor	Power cord, USB upstream cable(Zea), Pen(Zea, Black), OPS box, Waranty/QSG 0°C~40°C 10%~80%, non-condensing Filip app Landscape Touch overlay(IR), Front connectivity, OPS I/F support(W/OPS Box) Built in speaker(10W x 2), WiFI/BT module embedded Flip S/W
	Acces Operating Te Humi Ke Orient	sory imperature dity y stion H/W S/W Platform Processor On-Chip Cache	Power cord, USB upstream cable(Zea), Pen(Zea, Black), OPS box, Waranty/QSG 0°C-40°C 10%-80%, non-condensing Flip app Landscape Touch overlay(IR), Front connectivity, OPS I/F support(WOPS Box) Built in speaker(10W x 2), WiFI/BT module embedded Flip S/W Muse-M(Tizen 6.0)
	Acces Operating Te Humi Ke Orient	sory Imperature dity y ation H/W S/W Platform Processor On-Chip Cache Memory	Power cord, USB upstream cable(2ea), Pen(2ea, Black), OPS box, Waranty/QSG 10%-80%, non-condensing Flip app Landscape Touch overlay(IR), Front connectivity, OPS I/F support(w/OPS Box) Built in speaker(10W x 2), WiFI/BT module embedded Flip S/W Muse-M/Tizen 6.0) CA72 quad(1.7GHz) 2MB L2 L2 : 2MB
Operation	Acces Operating Te Humi Ke Orient Special	sory Imperature dity y ation H/W S/W Platform Processor On-Chip Cache Memory Clock Speed	Power cord, USB upstream cable(2ea), Pen(2ea, Black), OPS box, Waranty/QSG 0°C~40°C 10%~80%, non-condensing Filp app Landscape Touch overlay(IR), Front connectivity, OPS I/F support(w/OPS Box) Built in speaker(10W x 2), WiFI/BT module embedded Filp S/W Muse-M(Tizen 6.0) CA72 quad(1/36Hz) 2MB L2 L2 : 2MB 1.7GHz CPU quad
	Acces Operating Te Humi Ke Orient Special	sory Imperature dity y attion H/W S/W Platform Processor On-Chip Cache Memory Clock Speed Main Memory Interface	Power cord, USB upstream cable(2ea), Pen(2ea, Black), OPS box, Waranty/QSG 0°C_40°C 10%-80%, non-condensing Flip app Landscape Touch overlay(IR), Front connectivity, OPS I/F support(w/OPS Box) Built in speaker(10W x 2), WiFi/BT module embedded Flip S/W Muse-M(Tizen 6.0) CA72 quad (1/36/tz) 2MB L2 L2 : 2MB 1.7GHz CPU quad LPDDRA 1.6GHz 64bit 3.0GB
	Acces Operating Te Humi Ke Orient Special	sory mperature dity dity dity stion H/W S/W Platform Processor On-Chip Cache Memory Clock Speed Main Memory	Power cord, USB upstream cable(2ea), Pen(2ea, Black), OPS box, Waranty/QSG 0°C~40°C 10%~80%, non-condensing Filp app Landscape Touch overlay(IR), Front connectivity, OPS I/F support(w/OPS Box) Built in speaker(10W x 2), WiFI/BT module embedded Filp S/W Muse-M(Tizen 6.0) CA72 quad(1/36Hz) 2MB L2 L2 : 2MB 1.7GHz CPU quad
Operation Feature	Acces Operating Te Humi Ke Orient Special	sory Imperature dity y attion H/W S/W Platform Processor On-Chip Cache Memory Clock Speed Main Memory Interface	Power cord, USB upstream cable(2ea), Pen(2ea, Black), OPS box, Waranty/QSG 0°C_40°C 10%-80%, non-condensing Flip app Landscape Touch overlay(IR), Front connectivity, OPS I/F support(w/OPS Box) Built in speaker(10W x 2), WiFi/BT module embedded Flip S/W Muse-M(Tizen 6.0) CA72 quad (1/36/tz) 2MB L2 L2 : 2MB 1.7GHz CPU quad LPDDRA 1.6GHz 64bit 3.0GB
	Acces Operating Te Humi Ke Orient Special	sory Imperature dity y ation H/W S/W Platform Processor On-Chip Cache Memory Clock Speed Main Memory Interface Graphics	Power cord, USB upstream cable(2ea), Pen(2ea, Black), OPS box, Waranty/QSG O°C_40°C 10%-80%, non-condensing Filip app Landscape Touch overlay(IR), Front connectivity, OPS I/F support(w/OPS Box) Built in speaker(10W x 2), WiFi/BT module embedded Filip S/W Muse-M(Tizen 6.0) CA72 quad(17.67tz) 2MB L2 L 2 : 2MB 1.7GHz CPU quad LPDDR4 1.6GHz 64bit 3.0GB GPU: MaliGS1 MP4@760MHz
	Acces Operating Te Humi Ke Orient Special	sory Imperature dity y ation H/W S/W Platform Processor On-Chip Cache Memory Clock Speed Main Memory Interface Graphics Storage	Power cord, USB upstream cable(Zea), Pen(Zea, Black), OPS box, Waranty/QSG O°C~40°C 10%~80%, non-condensing Filip app Landscape Touch overlay(IR), Front connectivity, OPS I/F support(w/OPS Box) Built in speaker(10W x 2), WiFi/BT module embedded Filip S/W Muse-MiTizen 6.0) CA72 quad(1.7GHz) 2MB L2 L2 : 2MB 1.7GHz CPU quad LPDDRA1.6GHz 64bit 3.0GB GPU : MaliGS1 MP4@760MHz 16GB
Feature	Acces Operating Te Humi Ke Orient Special	sory Imperature didity dity dity ation H/W S/W Platform Processor On-Chip Cache Memory Clock Speed Main Memory Interface Graphics Storage 10 Ports Operating System	Power cord, USB upstream cable(2ea), Pen(2ea, Black), OPS box, Waranty/QSG O°C-40°C 10%-80%, non-condensing Filip app Landscape Touch overlay(IR), Front connectivity, OPS I/F support(tw/OPS Box) Built in speaker(10W x 2), WiFI/BT module embedded Filip S/W Muse-M(Tizen 6.0) CA72 quad(1.7GHz) 2MB L2 L2 : 2MB 1.7GHz CPU quad LPDDR41.6GHz 64bit 3.0GB GPU : MaliGSI MP4@760MHz 16GB USB 2.0
Feature	Acces Operating Te Humi Ke Orient Special Internal Player (Embedded H/W)	sory Imperature dity y ation H/W S/W Platform Processor On-Chip Cache Memory Clock Speed Main Memory Interface Graphics Storage IO Ports Operating System rity	Power cord, USB upstream cable(2ea), Pen(2ea, Black), OPS box, Waranty/QSG O°C_40°C 10%-80%, non-condensing Flip app Landscape Touch overlay(IR), Front connectivity, OPS I/F support(w/OPS Box) Built in speaker(10W x 2), WiFi/BT module embedded Flip S/W Muse-M(Tizen 6.0) CA72 quad(1/76/tz) 2MB L2 L2 ; 2MB 1.76Hz CPU quad LPDDR4 1.6GHz 64bit 3.0GB GPU : MaliGS1 MP4@760MHz 16GB USB 2.0 Tizen 6.0 : Samsung proprietary OS(VOLinux) 802.1x(WPA2 enterprise) : EAP-TLS, EAP-TILS, EAP-PEAP
	Acces Operating Te Humi Ke Orient Special Internal Player (Embedded H/W) Secu	sory Imperature dity y ation H/W S/W Platform Processor On-Chip Cache Memory Clock Speed Main Memory Interface Graphics Storage IO Ports Operating System rity	Power cord, USB upstream cable(2ea), Pen(2ea, Black), OPS box, Waranty/QSG O°C40°C 10%-80%, non-condensing Filip app Landscape Touch overlay(IR), Front connectivity, OPS I/F support(w/OPS Box) Built in speaker(10W x 2), WiFi/BT module embedded Filip S/W Muse-M(Tizen 6.0) CA72 quad(1/36/tz) 2MB L2 L2 : 2MB 1.7GHz CPU quad LPDDR41A6Hz 45Hit 3.0GB GPU : MaliG51 MP4@760MHz 16GB USB 2.0 Tizen 6.0 : Samsung proprietary OS(VDLinux)