Procure




Powered By Choice, Driven By You.

Samsung Smart Signage Small Display

QB24R / QB24R-T

Enhanced communication in a compact display

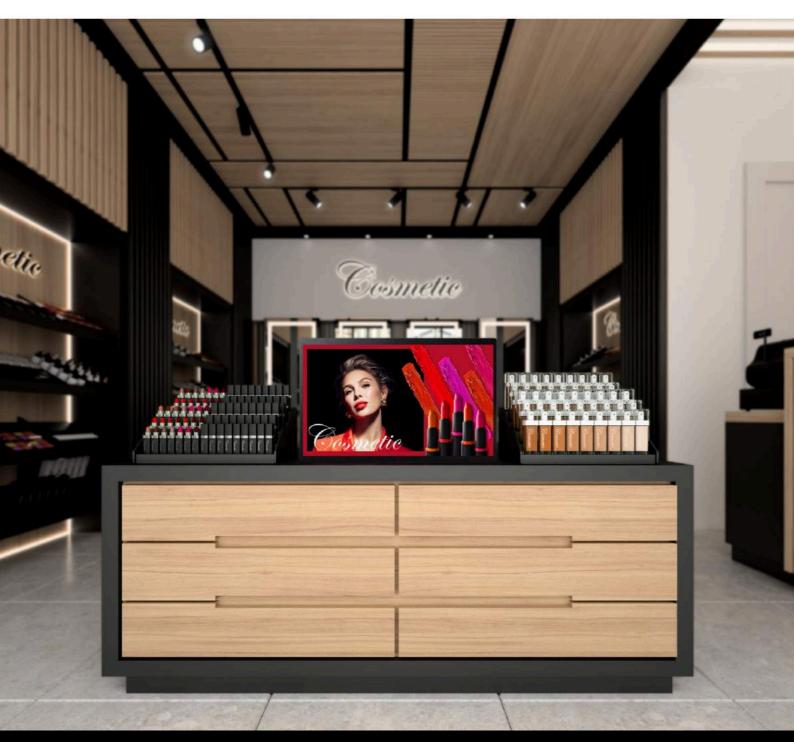

Industry trend

With an ever-growing need to create differentiated brick-and-mortar locations, providing a unique in-store experience is critically important for elevating a brand and driving sales. Therefore, businesses are finding new and effective ways to engage customers by making the most of every customer touch point. Small-sized displays are being adapted as common tools in various environments. More personalized, intimate content can reach the right audience at optimal points in time, increasing engagement and sales opportunities. Efficient content management and reliable performance ensure businesses can operate the displays without any hassle.

Introducing Samsung Small Displays

Samsung is introducing the two latest versatile, small-sized displays, the QB24R and touch-enabled QB24R-T. Designed for professional use, Samsung's QB24R and QB24R-T deliver clear content using the embedded MagicINFO S media player, supported by reliable 16/7 operation and industry standard certification to ensure safe operation and simple, reliable performance.









QB24R: Small Display

The QB24R is a small display that packs a heavy punch with FHD resolution delivering vivid, eye-catching text and content. Ideal for highlighting targeted promotions to drive purchase of key items on store shelves or nearby walls. Crisp visuals and powerful content playback help drive greater engagement and immediate customer interaction at the point of purchase. The display's compact design and clear visuals also make it an excellent choice for posting schedules for meeting rooms, classrooms or even elevators.



QB24R-T: Touch Display

With integrated capacitive touch functionality, the QB24R-T provides a user-friendly experience. Its 10-point multi-touch and fast response time powers an intuitive interface that allows for customer-driven search and action. QB24R-T is optimized for any interaction in locations such as health-care facilities, check-in at the gym, an automotive showroom, as well as any retail or restaurant environment where businesses would want to offer a personalized service while also acquiring customer data.



Key features



Crisp and visible content

Samsung's QB24R and QB24R-T are enhanced by a non-glare panel which always delivers clear images and text regardless of any ambient light. This essential feature is supported by reliable 16/7 operation, suitable for professional use.



Powerful content playback

With an embedded MagicINFO S player, backed by TIZEN, the QB24R and QB24R-T allow efficient and seamless playback without any external media player. SSSP also allows easy content development through reinforced compatibility with multiple web formats.



Convenient, clean display control

With center IR, each display receives IR signals direct to the panel, allowing easy and convenient remote control. When mounted, the display doesn't require an IR receiver cabling extension. Built-in Wi-Fi allows wireless remote management for both content and display.



Slim design

The compact and slim design of the display allows for efficient space utilization, even in compact locations. A sleek rear design makes the display optimal for wall mounting while the connectivity, content play and device controls are easy to operate.

*Depth of QB24R-T is 34.6 mm



Comprehensive security setup

The powerful Knox security system provides rigid, three-layer security, offering airtight protection at the application, platform and system level, while restricting access to content and hardware. In addition, remote control of the network and USB ports prevents any unauthorized access.



Safe operation, reliable performance

The QB24R and QB24R-T display are electromagnetic compatibility (EMC) class B compliant, meeting strict safety and reliability standards for operation. Additionally, IP5x rating ensures durable performance even in dusty environments.

Specifications

Model		7 11.7	QB24R	QB24R-T
	Diagonal Size	Class	24	24
	Type Measured		23.8	23.8
			ADS	ADS
	Resolution		FHD (1920 x 1080)	FHD (1920 x1080)
	Pixel Pitch (mm)		0.2745 x 0.2745	0.2745 x 0.2745
Panel	Active Display Area		527.04 (H) x 296.46 (V)	527.04 (H) x 296.46 (V)
	Brightness(Typ.)		250	250 (w/o Glass)
	Contrast Ratio (Typ.)		1000:1	1000:1 (w/o Glass)
	Viewing Angle(H/V)		178/178	178/178
	Response Time (G to G)		14ms (Typ.)	14ms (Typ.)
	Display Colors Color Gamut Operation Hour Haze		16.7 M (real 6bit, dither 8bit)	16.7 M (real 6bit, dither 8bit)
			72%	72%
			16/7	16/7
			25%	10%
	Dynamic C/R		MEGA	MEGA
			56 ~ 84.5kHz	56 ~ 84.5kHz
Display	v-scanning Frequency Maximum Pixel Frequency			
			48 ~ 75HZ	48~75HZ
			594MHz	594MHz
Sound	Speaker Type	1	Built in Speaker (5W)	Built in Speaker (5W)
		RGB	N/A	N/A
		VIDEO	HDMI1.4 (1)	HDMI1.4 (1)
	INPUT	HDCP	HDCP2.2	HDCP2.2
		AUDIO	N/A	N/A
		USB	USB 2.0 x1	USB 2.0 x1
		RGB	N/A	N/A
Connectivity		VIDEO	N/A	N/A
	OUTPUT	AUDIO	Stereo Mini Jack	Stereo Mini Jack
		Power Out	N/A	Power Out - N/A / Touch Out - x1
		USB	N/A	N/A
	EXTERNAL CONTROL	333	RS232C (in) thru stereo jack, RJ45	RS232C (in) thru stereo jack, RJ45
	EXTERNAL SENSOR		N/A	N/A
			N/A N/A	N/A N/A
	Tuner			
	Туре		Internal	Internal
	PowerSupply		AC100 - 240 V, 50/60 Hz	AC100 - 240 V, 50/60 Hz
		Max[W/h]	38.5	38.5
Power		Typical[W/h]	25	28
rower		Rating[W/h]	35	35
	Power Consumption	BTU(Max)	131.3	131.3
		Sleep mode	0.5	0.5
		Off mode	N/A	N/A
		Set	547.9 x 334.4 x 31.8	547.9 x 334.4 x 34.6
	Dimension(mm)	Package	620 x 419 x 122	620 x 419 x 122
		Set	3.0	4.0
Machanian	Weight (kg)	Package	4.1	5.2
Mechanical Spec	VESA Mount	rackage	100 x100	100 x100
Spec				2.0T
	Protection Glass		N/A	
	Stand Type		N/A	N/A
	Bezel Width (Top/Side/Bot) (mm)		17.9mm (U/B), 9.4mm (L/R)	17.9mm (U/B), 9.4mm (L/R)
Operation	Operating Temperature		0°C~ 40°C	0°C~ 40°C
	Humidity		10 ~ 80%	10 ~ 80%
			Small Signage Display	Small Touch Signage Display
	Key		Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0	Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0
	Special			Temperature Sensor, Pivot Display, Clock Battery (168hrs Clock Keeping),
		H/W	Temperature Sensor, Pivot Display, Clock Battery (168hrs Clock Keeping), Built in Speaker (5W1ch), IP5x Rating, WI-Fi/BT	Built in Speaker (5W1ch), IPSx Rating, Wi-Fi/BT, 10 Point Touch (Max)
			Auto Source Switching & Recovery,	Auto Source Switching & Recovery,
		S/W	LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting)	LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting)
		Processor	Cortex A721.7GHz Quad-Core CPU	Cortex A721.7GHz Quad-Core CPU
		On-Chip Cache	L1 Instruction Cache : 48KB	L1 Instruction Cache : 48KB
		Memory	L1 Data Cache : 32KB	L1 Data Cache : 32KB
			L2 Cache : 2MB	L2 Cache : 2MB
Feature		Clock Speed	1.7GHz	1.7GHz
		Main Memory	2.5GB	2.5GB
		Interface	LPDDR41.5GHz 64bit	LPDDR41.5GHz 64bit
			Graphic resolution : 1920 x 1080	
	Internal Player (Embedded H/W)	Graphics	Graphic resolution : 1920 x1080 Output resolution : 1920 x1080 (Scale up from graphic processing result.)	Graphic resolution : 1920 x 1080 Output resolution : 1920 x 1080 (Scale up from graphic processing result.)
	Internal Player (Embedded H/W)			Graphic resolution: 1920 x 1080
	Internal Player (Embedded H/W)	Graphics	Output resolution : 1920 x 1080 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC,	Graphic resolution : 1920 x1080 Output resolution : 1920 x1080 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC,
	Internal Player (Embedded H/W)	Graphics Storage (FDM) Multimedia	Output resolution : 1920 x 1080 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder: MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder: AC3 (DD), MPEG	Graphic resolution : 1920 x1080 Output resolution : 1920 x1080 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder : AC3 (DD), MPEG
	Internal Player (Embedded H/W)	Graphics Storage (FDM) Multimedia IO Ports	Output resolution : 1920 x 1080 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder : AC3 (DD), MPEG USB 2.0	Graphic resolution : 1920 x1080 Output resolution : 1920 x1080 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder: MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder: AC3 (DD), MPEG USB 2.0
	(Embedded H/W)	Graphics Storage (FDM) Multimedia	Output resolution : 1920 x 1080 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder : AC3 (DD), MPEG USB 2.0 Tizen 4.0 (VDLinux)	Graphic resolution : 1920 x1080 Output resolution : 1920 x1080 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder : AC3 (DD), MPEG USB 2.0 Tizen 4.0 (VDLinux)
	(Embedded H/W) Safety	Graphics Storage (FDM) Multimedia IO Ports	Output resolution : 1920 x 1080 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder : AC3 (DD), MPEG USB 2.0 Tizen 4.0 (VDLinux) 60950-1	Graphic resolution : 1920 x 1080 Output resolution : 1920 x 1080 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder : AC3 (DD), MPEG USB 2.0 Tizen 4.0 (VDLinux) 60950-1
	(Embedded H/W)	Graphics Storage (FDM) Multimedia IO Ports	Output resolution : 1920 x 1080 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder : AC3 (DD), MPEG USB 2.0 Tizen 4.0 (VDLinux) 60950-1 Class B	Graphic resolution : 1920 x1080 Output resolution : 1920 x1080 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder : AC3 (DD), MPEG USB 2.0 Tizen 4.0 (VDLinux) 60950-1 Class B
Certification	(Embedded H/W) Safety	Graphics Storage (FDM) Multimedia IO Ports	Output resolution : 1920 x 1080 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder : AC3 (DD), MPEG USB 2.0 Tizen 4.0 (VDLinux) 60950-1	Graphic resolution : 1920 x 1080 Output resolution : 1920 x 1080 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder : AC3 (DD), MPEG USB 2.0 Tizen 4.0 (VDLinux) 60950-1
Certification	(Embedded H/W) Safety EMC	Graphics Storage (FDM) Multimedia IO Ports	Output resolution : 1920 x 1080 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder : AC3 (DD), MPEG USB 2.0 Tizen 4.0 (VDLinux) 60950-1 Class B	Graphic resolution : 1920 x1080 Output resolution : 1920 x1080 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder : AC3 (DD), MPEG USB 2.0 Tizen 4.0 (VDLinux) 60950-1 Class B
Certification	(Embedded H/W) Safety EMC Environment	Graphics Storage (FDM) Multimedia IO Ports	Output resolution : 1920 x 1080 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder : AC3 (DD), MPEG USB 2.0 Tizen 4.0 (VDLinux) 60950-1 Class B ENERGY STAR 8.0, Epeat 802.1 x (WPA2 Enterprise) : EAP-TLS, EAP-TTLS, EAP-PEAP Quick Setup Guide, Warranty Card,	Graphic resolution : 1920 x1080 Output resolution : 1920 x1080 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder : AC3 (DD), MPEG USB 2.0 Tizen 4.0 (VDLinux) 60950-1 Class B ENERGY STAR 8.0, Epeat 802.1 x (WPA2 Enterprise) : EAP-TLS, EAP-PEAP Quick Setup Guide, Warranty Card,
Certification	(Embedded H/W) Safety EMC Environment Security	Graphics Storage (FDM) Multimedia IO Ports Operating System	Output resolution : 1920 x 1080 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder : AC3 (DD), MPEG USB 2.0 Tizen 4.0 (VDLinux) 60950-1 Class B ENERGY STAR 8.0, Epeat 802.1 x (WPA2 Enterprise) : EAP-TLS, EAP-TTLS, EAP-PEAP Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries	Graphic resolution : 1920 x 1080 Output resolution : 1920 x 1080 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder : AC3 (DD), MPEG USB 2.0 Tizen 4.0 (VDLinux) 60950-1 Class B ENERGY STAR 8.0, Epeat 802.1 x (WPA2 Enterprise) : EAP-TLS, EAP-TTLS, EAP-PEAP Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries, USB Cable
Certification	(Embedded H/W) Safety EMC Environment Security	Graphics Storage (FDM) Multimedia IO Ports Operating System	Output resolution : 1920 x 1080 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder : AC3 (DD), MPEG USB 2.0 Tizen 4.0 (VDLinux) 60950-1 Class B ENERGY STAR 8.0, Epeat 802.1 x (WPA2 Enterprise) : EAP-TLS, EAP-TLS, EAP-PEAP Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries N/A	Graphic resolution : 1920 x 1080 Output resolution : 1920 x 1080 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder : AC3 (DD), MPEG USB 2.0 Tizen 4.0 (VDLinux) 60950-1 Class B ENERGY STAR 8.0, Epeat 802.1 x (WPA2 Enterprise) : EAP-TLS, EAP-TTLS, EAP-PEAP Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries, USB Cable N/A
	(Embedded H/W) Safety EMC Environment Security Included	Graphics Storage (FDM) Multimedia IO Ports Operating System	Output resolution : 1920 x 1080 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder : AC3 (DD), MPEG USB 2.0 Tizen 4.0 (VDLinux) 60950-1 Class B ENERGY STAR 8.0, Epeat 802.1 x (WPA2 Enterprise) : EAP-TLS, EAP-TTLS, EAP-PEAP Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries	Graphic resolution : 1920 x 1080 Output resolution : 1920 x 1080 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder : AC3 (DD), MPEG USB 2.0 Tizen 4.0 (VDLinux) 60950-1 Class B ENERGY STAR 8.0, Epeat 802.1 x (WPA2 Enterprise) : EAP-TLS, EAP-TTLS, EAP-PEAP Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries, USB Cable
	(Embedded H/W) Safety EMC Environment Security	Graphics Storage (FDM) Multimedia IO Ports Operating System	Output resolution : 1920 x 1080 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder : AC3 (DD), MPEG USB 2.0 Tizen 4.0 (VDLinux) 60950-1 Class B ENERGY STAR 8.0, Epeat 802.1 x (WPA2 Enterprise) : EAP-TLS, EAP-TLS, EAP-PEAP Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries N/A	Graphic resolution : 1920 x 1080 Output resolution : 1920 x 1080 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder : AC3 (DD), MPEG USB 2.0 Tizen 4.0 (VDLinux) 60950-1 Class B ENERGY STAR 8.0, Epeat 802.1 x (WPA2 Enterprise) : EAP-TLS, EAP-TTLS, EAP-PEAP Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries, USB Cable N/A