

Procure



**Powered By Choice,
Driven By You.**

Specifications

SMART Board® 6075 Pro interactive display

Model SPNL-6075P


Overview

The SMART Board® 6075 Pro interactive display combines SMART's proprietary DVIT® (Digital Vision Touch) technology with the premium touch experience of SMART Meeting Pro® software.

The 75" 4K ultra-high-definition LED display provides optimal image clarity and wide viewing angles. With the Pen ID™ feature, you can assign different appearances to the two pens and write or draw over any application in digital ink.


Object awareness™ allows you to perform mouse functions with your finger, write in digital ink with the pen, and erase with your palm or eraser—all without switching tools or modes. You can use a variety of gestures in applications, and two users can write or draw at the same time.

See smarttech.com for more information about this product.

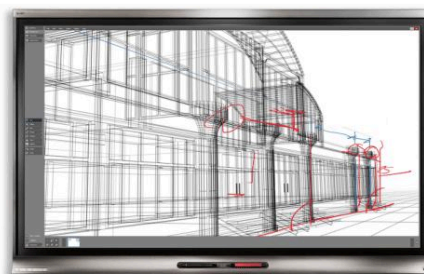

Dimensions and weights¹

Dimensions

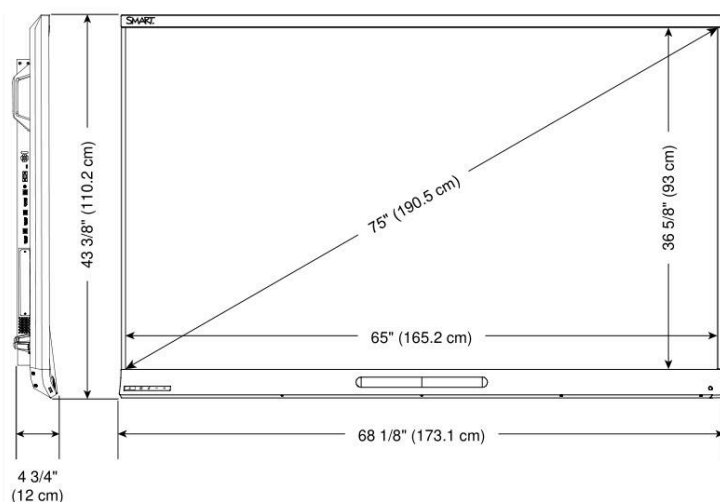

Weight

185 lb. (84 kg)

Shipping dimensions (including pallet)

75 3/8" × 54 3/8" × 14"

(191.6 cm × 138 cm × 35.5 cm)

Shipping weight

238 lb. (108 kg)



As an ENERGY STAR® certified signage display, the SMART Board 6075 Pro interactive display meets strict energy efficiency guidelines set by the U.S. Environmental Protection Agency and Department of Energy.

¹All dimensions ± 1/8" (0.3 cm). All weights ± 2 lb. (0.9 kg).

SPECIFICATIONS

SMART BOARD 6075 PRO INTERACTIVE DISPLAY – MODEL SPNL-6075P

Hardware

Interaction

Touch technology	DViT technology
Multitouch capabilities	8 touches ²
Object awareness	Behavior adjusts automatically to the tool or object you're using, whether it's a pen, finger, eraser or palm.
Pen ID	Two people can write independently and simultaneously, using different colored ink.

Display

Type	LED
Aspect ratio	16:9
Optimal resolution	3840 × 2160 at 30 Hz (HDMI®) or 60 Hz (DisplayPort)
Horizontal frequency	122–140 kHz (typically 135 kHz)
Vertical frequency	47–63 Hz (typically 60 Hz)
Contrast ratio (typical)	5000:1
Brightness (maximum)	360 cd/m ²
Pixel dimensions	0.429 mm × 0.429 mm
Gamut	72% of NTSC
Viewing angle	178°
Response time (typical)	8 ms

Presence detection	Presence detection sensor on the bottom frame
---------------------------	---

Audio	10 W integrated speakers (×2)
--------------	-------------------------------

Noise level	<35 dBA
--------------------	---------

Included cables and accessories	8' (2.4 m) country-specific power cable 16' 5" (5 m) USB cable Pen (×2)
--	---

Mounting holes	For a standard VESA® 600 mm × 400 mm mounting plate Lower mounting holes 13 3/4" (35 cm) from the bottom of the display
-----------------------	--

Mounting bracket depth	Minimum depth of 1 5/8" (4.2 cm) for all components on the back of the display to clear the wall
-------------------------------	--

²Requires SMART Product Drivers to be installed. Some applications might not support 8 touches. Only up to 4 touch points and no pen support on Chrome OS™ operating system.

Connectors

Connector panel	OPS slot HDMI®1 input connectors HDMI 1.4 in USB Type-B HDMI2 input connectors HDMI 1.4 in USB Type-B DisplayPort input connectors DisplayPort in USB-Type-B Stereo 3.5 mm out RS-232 in
Bottom	USB 2.0 Type-A
Back	AC power inlet

Installation requirements

Interactive display	See the <i>SMART Board 6000 and 6000 Pro series interactive displays installation and maintenance guide</i> (smarttech.com/kb/171167)
Room computers and guest laptops	
General requirements	See the SMART Meeting Pro software release notes
4K UHD	Graphics card that can support 3840 × 2160 resolution at 30 Hz and that has 1 GB DDR 5 memory See Minimum requirements for Ultra High Definition or 4K on your interactive flat panel
Mini-computers	
General requirements	See the SMART Meeting Pro software release notes
Dimensions	Smaller than 10" × 10" × 2" (25.4 cm × 25.4 cm × 5.1 cm)
Weight	Less than 10 lb. (4.5 kg)
Mounting	VESA 75 mm × 75 mm or 100 mm × 100 mm mounting pattern

Cable requirements

HDMI	Maximum length: 23' (7 m)
NOTES	
<ul style="list-style-type: none"> • Use only certified HDMI cables that have been tested to support the performance standard you require. • The performance of cables longer than 23' (7 m) is highly dependent on the cable's quality. 	

SPECIFICATIONS

SMART BOARD 6075 PRO INTERACTIVE DISPLAY – MODEL SPNL-6075P

DisplayPort	DisplayPort 1.2 compliant or better Maximum length: 23' (7 m)
USB	Maximum length: 16' (5 m)
Important	Using cables that exceed these maximum lengths can produce unexpected results, such as degraded picture quality or USB connectivity. Refer to <i>SMART installation standards</i> (smarttech.com/kb/171035) for comprehensive information about cables and extensions for SMART hardware products.

Storage and operating requirements

Power requirements	100V to 240V AC, 50 Hz to 60 Hz
Power consumption at 77°F (25°C)	
Standby mode	<2 W
Normal operating (out-of-box)	<131 W
Maximum operating (with accessories)	315 W
Operating temperature	41–95°F (5–35°C)
Storage temperature	-4–140°F (-20–60°C)
Humidity	5–80% relative humidity, non-condensing

Certification and compliance

Regulatory certification	UL (U.S./Canada), FCC, IC, EMC, LV, VCCI, PSE, KC Mark
Environmental compliance	
European Union	REACH, RoHS, WEEE and Packaging
U.S.	Packaging and Conflict Minerals

Purchasing information

Order number	
SPNL-6075P	SMART Board 6075 Pro interactive display with one SMART Meeting Pro software room license and 10 SMART Meeting Pro software personal licenses
Optional accessories	
UGK-AM40-ENT	iQ appliance for SMART Board 6000 and 7000 series interactive displays
WM-SBID-501	Fixed wall mount for SMART Board interactive displays
Other	See smarttech.com/accessories

SMART BOARD 6075 PRO INTERACTIVE DISPLAY – MODEL SPNL-6075P

Warranty	Three-year limited equipment warranty
Extended warranty	
EWY1-SPNL-6075P	One-year warranty extension
EWY2-SPNL-6075P	Two-year warranty extension