

Procure



**Powered By Choice,
Driven By You.**

make.believe


Ultra Short Throw Projector

VPL-SW536


Key Features

- 3,100 lumens (ISO 21118)
- Native WXGA (1,280x800) resolution
- High contrast ratio
- BrightEra® Panel
- Ultra Short throw distance (TR= 0.27:1-0.29:1)
- Optical lens shift and zoom for easy adjustment
- Long-lasting lamp
Recommended lamp replacement time 6000h (low mode)
- Synchronized lamp and filter maintenance cycle
- Energy efficient design
 - Auto power saving mode
 - Blank with lamp dimming
 - 4 lamp mode (High, Std, Low, Auto*)
 - *Auto lamp control by picture brightness
 - ECO MODE key
- Convenient terminals including HDMI, RS-232C and RJ-45
- 16W Speaker
- USB display
- USB media viewer
- Wireless capability (option)


Dimensions (Front) Unit: mm (inches)

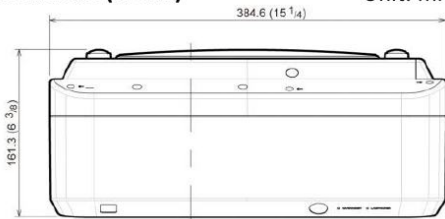

Dimensions (Bottom)

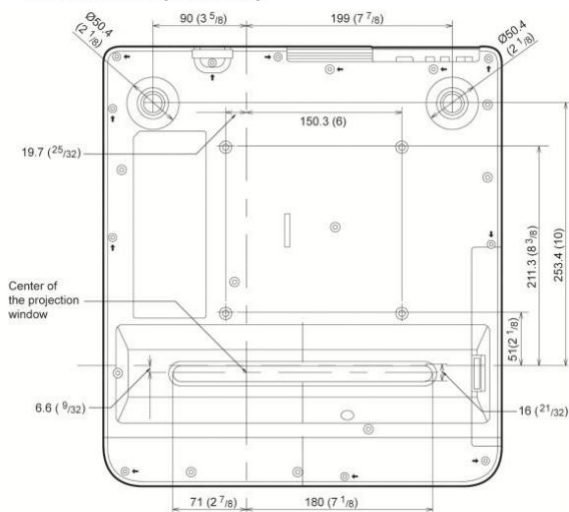

Connector Panels

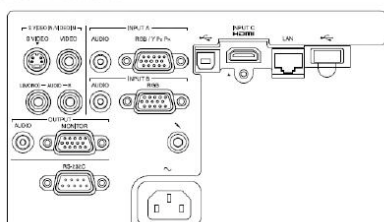

WXGA / 3,100 lm

Optical		
Light Output / Color Light Output		3100 lumens (Lamp mode: High) 2400 lumens (Lamp mode: Standard) 2000 lumens (Lamp mode: Low)
LCD Panels		0.75"x3 BrightEra LCD Panel
Panel Display Resolution		WXGA (1280x800 dots)
Contrast Ratio		2,500:1 (Full white/full black)* ¹
Light Source		Ultra high-pressure mercury lamp 210 W type
Recommended Lamp Replacement Time* ²		3000H (Lamp mode: High) 4500H (Lamp mode: Standard) 6000H (Lamp mode: Low)
Filter Cleaning Cycle* ²		Max. 6000H Same time as the lamp replacement is recommended
Projection Lens	Zoom / Focus	Approx. 1.05x Manual Zoom / Manual Focus
	Lens Shift	Manual, Vertical +/- 4% Horizontal +/- 2%
	Throw Ratio	0.27:1 to 0.29:1
Screen Size		70" to 130"
Interface		
Computer and Video Input/Output	INPUT A	Mini D-sub 15-pin (RGB/Y Pb Pr) Audio: Stereo mini jack
	INPUT B	Mini D-sub 15-pin (RGB) Audio: Stereo mini jack
	INPUT C	HDMI® (Digital RGB/Y Pb Pr, Digital Audio) (HDCP support)
	VIDEO IN	Pin Jack Audio : Pin jack (x2) (shared with S VIDEO IN)
	S VIDEO IN	Mini DIN 4-pin Audio : Pin jack (x2) (shared with VIDEO IN)
	Monitor OUT	Mini D-sub 15-pin (from INPUT A and INPUT B)
	Audio OUT	Stereo mini jack (variable out)* ³
Other Signal Input/Output	RS-232C	D-sub 9-pin (male)
	LAN	RJ-45, 10BASE-T/100BASE-TX
	USB	Type-A, Type-B
	Microphone input	Mini jack
General		
Speaker		16Wx1 (monaural)
Scanning Frequency		H: 15 to 92 kHz, V: 48 to 92 Hz
Display Resolution	Computer Signal Input	Maximum display resolution : 1600x1200 dots
	Video Signal Input	Video(Composite), 15k(480/60i, 575/50i), DTV (480/60p, 575/50p, 720/60p, 720/50p, 1080/60i, 1080/50i, 1080/60p, 1080/50p)
Color System		NTSC3.58, PAL, SECAM, NTSC4.43, PAL-M, PAL-N
UPC Code		0 27242 86111 4
Power Requirements		AC 100 V to 240 V, 3.0 A to 1.3 A, 50 Hz/60 Hz
Power Consumption		291 W (AC 100 V-120 V) 282 W (AC 220 V-240 V)
Standby Mode Power Consumption		5.7 W (Std)/ 0.5 W (Low) (AC 100V-120 V) 5.9 W (Std)/ 0.5 W (Low) (AC 220V-240 V)
Dimensions (WxHxD) (without protrusion)		384.4 x 122.5 x 423.4 mm 15 1/8 x 4 13/16 x 16 21/32"
Mass		6.9kg / 15 lb 3 oz
Optional Accessories		
Replacement Lamp		LMP-E212
Wall Mount		PSS-640
Wireless LAN Module		IFU-WLM3
Service Parts		
Replacement Filter		4-400-488-01 (FILTER A [Outside]) 4-400-490-01 (FILTER B [Inside]) (Filters are cleanable)
Replacement Remote		1-490-463-11 (RM-PJ8)

*¹ The value is average with lamp dimming.

*² The figures are expected maintenance time and not guaranteed.
They will depend on the environment or how the projector is used.

*³ Works as an audio switcher function. Output from a selected channel, not available in standby.

For more information, visit: www.sony.com/projectors