

Procure



**Powered By Choice,
Driven By You.**


Short Throw Projector VPL-SX235

Key Features


- 3,200 lumens
- Native XGA (1,024x768) resolution
- High contrast ratio
- Bright Era™ Panel
- Short throw distance (TR= 0.46:1 / 80" 0.75m)
- Long-lasting lamp
Recommended lamp replacement time 10000h (low mode)
- Energy efficient design
 - Auto power saving mode
 - Blank with lamp dimming
 - 4 lamp mode (High, Std, Low, Auto*)
 - *Auto lamp control by picture brightness
 - ECO MODE key
- Convenient terminals including HDMI, RS-232C and RJ-45
- 16W Speaker
- USB display
- USB media viewer
- PC Wireless capability (option)
- Tablet Device & Smart Phone connection (wireless)

Dimensions (Front)


Unit: mm (inches)

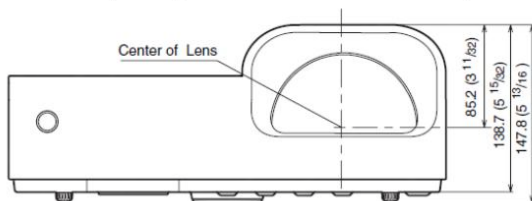

Dimensions (Bottom)

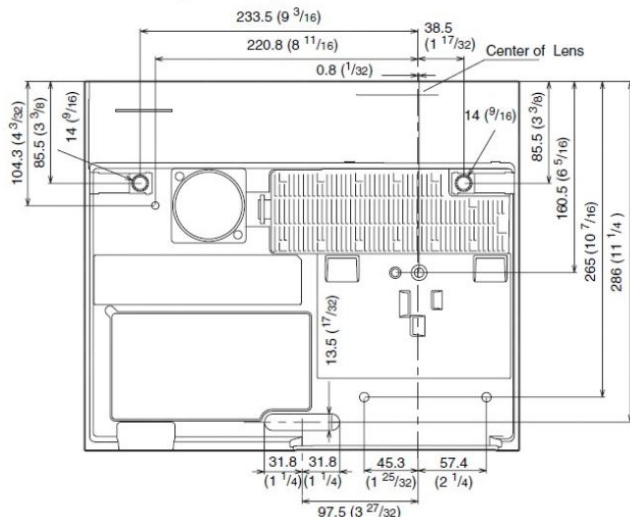

Connector Panels

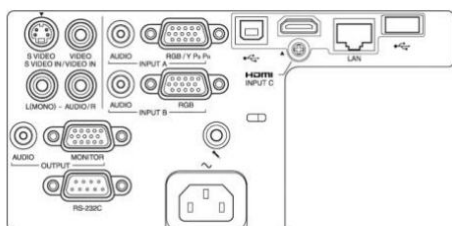

XGA / 3,200 lm

Optical		
Light Output / Color Light Output	3200 lumens (Lamp mode: High)	
	2400 lumens (Lamp mode: Standard)	
	1900 lumens (Lamp mode: Low)	
LCD Panels		0.63"x3 BrightEra LCD Panel
Panel Display Resolution		XGA (1024x768 dots)
Contrast Ratio		3,000:1 (Full white/full black)* ¹
Light Source		Ultra high-pressure mercury lamp 210 W type
Recommended Lamp Replacement Time* ²	4000H (Lamp mode: High)	
	6000H (Lamp mode: Standard)	
	10000H (Lamp mode: Low)	
Filter Cleaning Cycle* ²		Max. 7000H
Projection Lens	Focus	Manual
	Throw Ratio	0.46:1 / 80" 0.75m
Screen Size		60" to 110"
Interface		
Computer and Video Input/Output	INPUT A	Mini D-sub 15-pin (RGB/Y Pb Pr) Audio: Stereo mini jack
	INPUT B	Mini D-sub 15-pin (RGB) Audio: Stereo mini jack
	INPUT C	HDMI (Digital RGB/Y Pb Pr, Digital Audio) (HDCP support)
	VIDEO IN	Pin Jack Audio : Pin jack (x2) (shared with S VIDEO IN)
	S VIDEO IN	Mini DIN 4-pin Audio : Pin jack (x2) (shared with VIDEO IN)
	Monitor OUT	Mini D-sub 15-pin (from INPUT A and INPUT B)
	Audio OUT	Stereo mini jack (variable out)* ³
Other Signal Input/Output	RS-232C	D-sub 9-pin (male)
	LAN	RJ-45, 10BASE-T/100BASE-TX
	USB	Type-A, Type-B
	Microphone input	Mini jack
General		
Speaker		16W (mono)
Scanning Frequency		H: 14 to 93 kHz, V: 47 to 93Hz
Display Resolution	Computer Signal Input	Maximum display resolution : UXGA 1600x1200 dots
	Video Signal Input	Video (Composite), 15k (480/60i, 575/50i), DTV (480/60p, 575/50p, 720/60p, 720/50p, 1080/60i, 1080/50i, 1080/60P, 1080/50P)
Color System		NTSC3.58, PAL, SECAM, NTSC4.43, PAL-M, PAL-N
UPC Code		0 27242 86914 1
EAN / JAN Code		49 05524 93888 3
Power Requirements		AC 100 V to 240 V, 3.2 A to 1.3 A, 50 Hz/60 Hz
Power Consumption		308 W (AC 100 V-120 V) 297 W (AC 220 V-240 V)
Standby Mode Power Consumption		4.9 W (Std) / 0.5 W (Low) (AC 100V-120 V) 5.1 W (Std) / 0.5 W (Low) (AC 220V-240 V)
Dimensions (WxHxD) (without protrusion)		365 x 138.7x 310 mm 14 3/8 x 5 15/32 x 12 7/32 "
Mass		4.4 kg / 9 lb 11 oz
Optional Accessories		
Replacement Lamp		LMP-E212
USB wireless module		IFU-WLM3
Service Parts		
Replacement Filter		4-426-702-01 (FILTER) (Filters are cleanable)
Replacement Remote		1-490-463-11 (RM-PJ8)

*¹ The value is average.

*² The figures are expected maintenance time and not guaranteed.
They will depend on the environment or how the projector is used.

*³ Works as an audio switcher function. Output from a selected channel, not available in standby.