

Procure



**Powered By Choice,
Driven By You.**

LightStream™ XGA 1024x768 Short Throw Projector

True-to-Life Color in Any Light*

PJD5353LS



The ViewSonic® LightStream™ PJD5353LS value projector lets you experience true-to-life color in any lighting condition. Whether for classrooms, meeting rooms, or home theaters, ViewSonic LightStream projectors bring lesson plans, presentations, and movies to life with vivid colors and crisp images. Equipped with SuperColor™ technology and a high-brightness output, this projector strikes a perfect balance of color and light to deliver the ultimate in color accuracy without compromise. In addition to incredible screen performance, the PJD5353LS projector features a smart and intuitive design that includes a sleek white chassis, a programmable remote control, an easy-access top lamp door, and an optional cable management hood for reduced clutter. A short throw lens with a 0.6 throw ratio projects large images in small rooms. Delivering amazing lifelike color at an affordable price, ViewSonic's LightStream PJD5 series of projectors are the ideal multipurpose projection solution for any room.

Key Features:

Best in class color accuracy
Smart design
Enhanced sound


Designed for:

Education
Business
Home

LightStream™ XGA 1024x768 Short Throw Projector


PJD5353LS

Projection Distance		Screen Size (4:3) Diagonal	
Inches	Meters	Inches	Meters
15	0.4	30	0.8
19	0.5	40	1.0
24	0.6	50	1.3
29	0.74	60	1.5
34	0.86	70	1.8
39	0.99	80	2.0
44	1.11	90	2.3
49	1.23	100	2.5
58	1.48	120	3.0
73	1.9	150	3.8
97	2.5	200	5.1
122	3.1	250	6.4
146	3.7	300	7.6

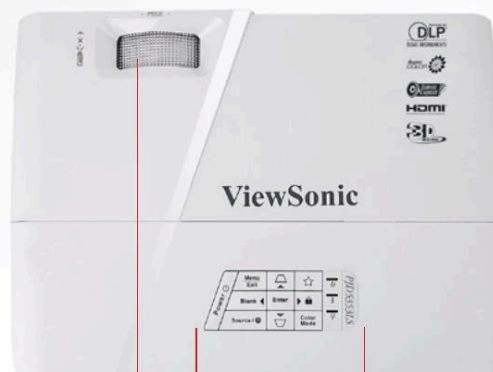

Focus Ring

Control Panel

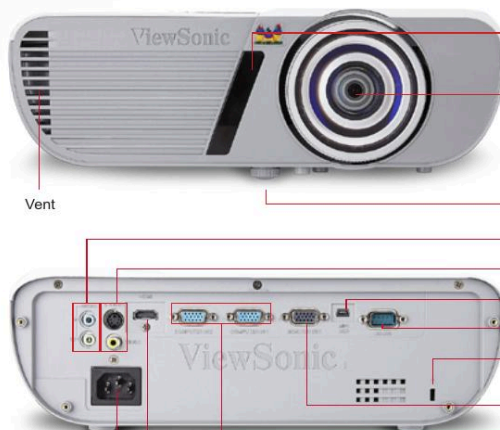

IR Remote Sensor

Projection Lens

Vent

Elevation Foot

Audio In / Out

S-Video / Video In

USB mini Type B

RS232

Kensington® Lock Slot

Monitor Out

VGA In

HDMI

AC In

Specifications

DISPLAY	Type	0.55" Digital Micromirror Device (DLP™)
	Resolution	1024 x 768 (native)
Lens	Fixed zoom / manual optical focus	
	Keystone	Manual vertical digital keystone correction (± 40°)
Size	50 – 250 in. / 1.27 – 6.35 m (diagonal)	
	Throw Distance	2.0 – 10.12 ft. / 0.61 – 3.09 m
Throw Ratio	0.61:1	
	Lamp	190 watt
Light Life	5000 / 10000 hours** (Normal / Eco-mode)	
	Brightness	3200 lm
Contrast Ratio	13,500:1 (DynamicEco Mode)	
	Aspect Ratio	4:3 (native)
Color Depth	30 bits, 1.07B Color (10+10+10)	
INPUT SIGNAL	Computer and Video	NTSC M(3.58MHz), 4.43MHz, PAL (B, D, G, H, I M, N, 60), SECAM (B, D, G, K, K1, L), SD 480i and 576i, ED 480p and 576p, HD 720p, 1080i, 1080p
	Frequency	Fh: 15–102KHz, Fv: 23–120Hz
COMPATIBILITY	PC	Up to 1920x1080
	Mac®	Up to 1920x1080 (may require MAC adapter)
CONNECTOR	Digital Input	HDMI 1.4
	RGB Input	15-pin mini D-Sub (x2)
RGB Output	15-pin mini D-Sub	
	Composite Input	RCA jack
S-Video	4-pin mini-DIN	
	Audio Input	3.5mm mini jack
Audio Output	3.5mm mini jack	
	USB	Mini type B (mouse control and maintenance)
Control	RS232	

AUDIO	Speaker	2W (x1)
NOISE LEVEL	Normal / Eco-mode	32 dB / 27 dB
POWER	Voltage	100–240VAC (Auto Switching), 50-60Hz (universal)
	Consumption	265W (max) / <0.5W (stand-by mode)
CONTROLS	Basic	Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source
	OSD	Display, Picture, Source, System Setup (Basic), System Setup (Advanced), Information (See user guide for full OSD functionality)
OPERATING CONDITIONS	Temperature	32–104° F (0–40° C)
	Humidity	10–90% (non-condensing)
Altitude	0–6,000 ft (1,800m), operational up to 10,000 ft (3,048m)	
DIMENSIONS (W x H x D)	Physical	12.44 x 8.98 x 4.08 in. / 316 x 228 x 103.7 mm
	Packaging	16.0 x 8.85 x 13.58 in. / 408 x 225 x 345 mm
WEIGHT	Net	5.5 lb. / 2.5 kg
	Gross	8.4 lb. / 3.8 kg
REGULATIONS		
WARRANTY		
CB, TUV-GS, UL/cUL, FCC (including ICES-003), CE, C-Tick, Mexico Energy, EAC, UkrSEPRO/EMC DOC, UL COC, TUV-S, PSB, KCC, KC, SASO, CCC, BIS, WEEE, RoHS, REACH, SVHC, ErP		
3-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service***		

Optional Accessories

Replacement Lamp	RLC-092
Wireless Presentation Gateway	WPG-370
Wireless Presentation Gateway Dongle	WPG-300†
3D Active Shutter Glasses	PGD-350
Short Throw Mount	WMK-005
Cable Management	PJ-CM-002
Carrying Case	PJ-CASE-008
Extended Warranty	PRJ-EW-07-02

What's in the box?

PJD5353LS projector, power cable, VGA cable, remote control with batteries, Quick Start Guide, ViewSonic Wizard CD (with User Guide)



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.