

Procure



**Powered By Choice,
Driven By You.**



万胜凯机械有限公司
WIDESKY MACHINERY CO.,LTD.

不加温造粒线 NO HEATER RECYCLING LINE

不加温造粒线采用高速摩擦原理加热来造粒，工作期间不采用电热片。

适用于HDPE、LDPE、PVC、EVA及一些复合膜。

有以下优点：

- 造出的粒子高质量，造粒过程中不改变塑料的物理性能
- 环保，造粒过程中不产生废气，废水，废料
- 操作简单，造粒过程中无需加热，随开随停
- 节能，耗电量比传统造料给节约电量20%—40%，节约用水

The no heater recycling granulation line uses high-speed friction principle to heat to granulate, and does not use electric heating coil during the working period.

Suitable for HDPE, LDPE, PVC, EVA and some composite films.

With following advantages:

- The output granules are of high quality, and the physical properties of the plastic are not changed during the granulation process.
- Environmental protection, no waste gas, waste water or waste plastic during the granulation process
- Simple operation, no need to heat during the granulation process, start and stop at any time
- Energy saving, power consumption is 20%—40% less than traditional materials, also conserve water.


磨面热切款

HOT FACE CUTTING TYPE



HDPE BAG
PUNCHING PARTS

HDPE PE100

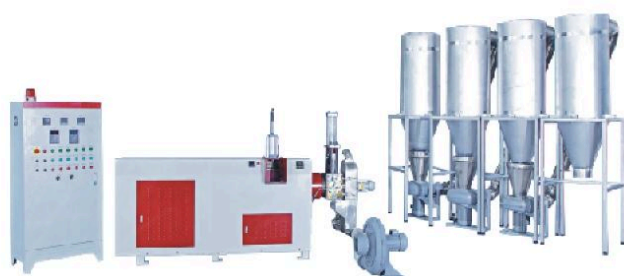


磨面水环切款

WATER RING FACE CUTTING TYPE



LDPE FILM
薄膜

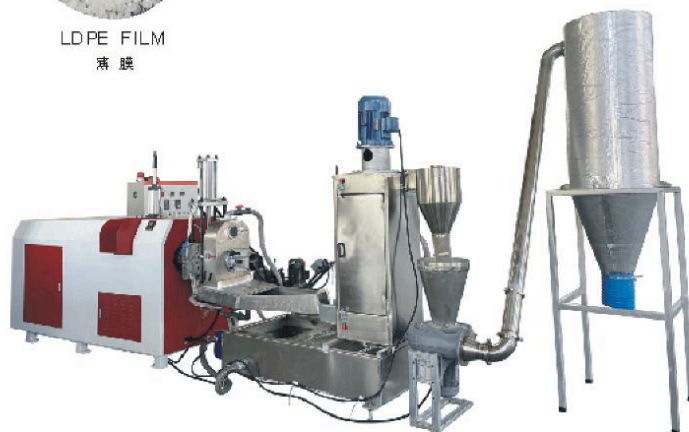

型号 Model	SJ-110	SJ-130
挤出机型号 Extruder Size	110MM	130mm
主电机 Main Motor	37KW	55KW
风机 Blower	2.2KW*3PCS	2.2KW*4PCS
旋风桶 Cyclone Hopper	450MM DIA*3PCS	500MM DIA*3PCS
产量 Yield	60-120KGS/H	200-250KGS/H

型号 Model	SJ-110	SJ-130
挤出机型号 Extruder Size	110MM	130mm
主电机 Main Motor	37KW	55KW
脱水机 Dewater machine	5.5kw	7.5kw
风机 Blower	2.2KW*1PCS	2.2KW*1PCS
旋风桶 Cyclone Hopper	560MM DIA*1PCS	560MM DIA*1PCS
产量 Yield	60-120KGS/H	200-250KGS/H