

DS-D5D65RB/C Interactive Tablet



The interactive tablet (hereafter referred to as the “device”) integrates technologies like 4K display, infrared touch, human-machine interaction, multi-media information processing, and network transmission, and provides users with various features such as writing, annotating, multi-screen sharing, and remote video call (optional). The Interactive tablet is mainly used for remote video conferences, trainings and guidance, medical consulting, as well as other events in kinds of offices, meeting rooms, multi-media classrooms, exhibition halls and so on.

- **4K Display Presenting More Details**

4K resolution improves the image details with the features of being anti-glared, fingerprint-resistant, and strong light-blocked.

- **Instant and Ultra-Fine Writing**

Provides smooth writing with the touch precision of 1 mm, and smart stroke optimization makes every stroke more real.

- **One-touch Sharing for Meeting**

Annotation sharing by QR code or e-mail ensures more concentrations and higher efficiency.

- **Free Annotating Without Boundaries**

Built-in application enables free annotations and instant saving on any interfaces. The whiteboard system can register up to 20 simultaneous touch points, showing different opinions at the same time.

- **Wireless Screen Mirroring**

Wireless screen mirroring through laptop, desktop PC, mobile phone, and tablet with no need to connect cables.

Convenient solution comparison thanks to screen split by half and by quarter.

- **Front panel button**

Support power on/off, volume up/down, signal source switching




▪ Specification

Model		DS-D5B65RB/A
Product Model	Product Model	DS-D5D65RB/C
Display	Screen Size	65 inch LED Backlight
	Backlight	DLED
	Pixel Pitch	0.124(H) × 0.372(V) mm
	Resolution	3840 × 2160@60 Hz
	Brightness	400 cd/m ² with Brightness sensor
	Viewing Angle	178°(H)/178°(V)
	Color Depth	1.07B
	Contrast Ratio	5000:1
	Response Time	6 ms
	Refresh Rate	60 Hz
	Color Gamut	90% NTSC(CIE1931)(Typ.)
Built-in System	Operation System	Android 11
	Processor	Quad-core
	Memory	8 GB
	Built-In Storage	64 GB
	NIC	Built-in 1000 Mbps NIC
Touch	Type	Infrared touch screen
	Glass	Smooth tempered glass being anti-glare and explosion-proof Hardness glass: level 7 MOHS thickness glass
	Touch Point	20 point multi-touch
	Touch Response Time	< 10 ms
	Touch Precision	± 1 mm (≥ 90% touching area)
	Screen Lamination Type	Non-laminated
Interface	Video & Audio Input	HDMI IN×3, MAX 4 K @ 60 Hz, VGA×1, LINE IN×1
	Video & Audio Output	HDMI OUT × 1, MAX 4K@60 Hz, LINE OUT × 1, SPDIF× 1
	Network Interface	RJ45 (1000 Mbps port) × 2 Wi-Fi IEEE 802.11a/b/g/n/ac
	Data Transmission Interface	TYPE-A USB × 2, TYPE-B touch USB3.0 × 4, TYPE-C × 1(65W) , TYPE-C × 1(15W)
	Control Interface	RS-232 × 1
Internal Function	Loudspeaker	Built-in 2 × 16 W loudspeaker
	Bluetooth & NFC	Built-in BLE (Bluetooth Low Energy) module supports Bluetooth 5.0 and previous version
Power	Power Consumption	< 160 W
	Standby Consumption	0.5 W
Working Environment	Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
	Working Humidity	10% to 90% RH
	Lifetime	50000h
General	Power Supply	100 to 240 VAC, 50/60 Hz

Product Dimensions (W × H × D)	1507 × 905 × 86 mm
Package Dimensions (W × H × D)	1687 × 1061 × 234mm
Net Weight	< 47kg
Gross Weight	50.19 kg
Accessory	2 pens, wall-mounted bracket included in the package

▪Dimension

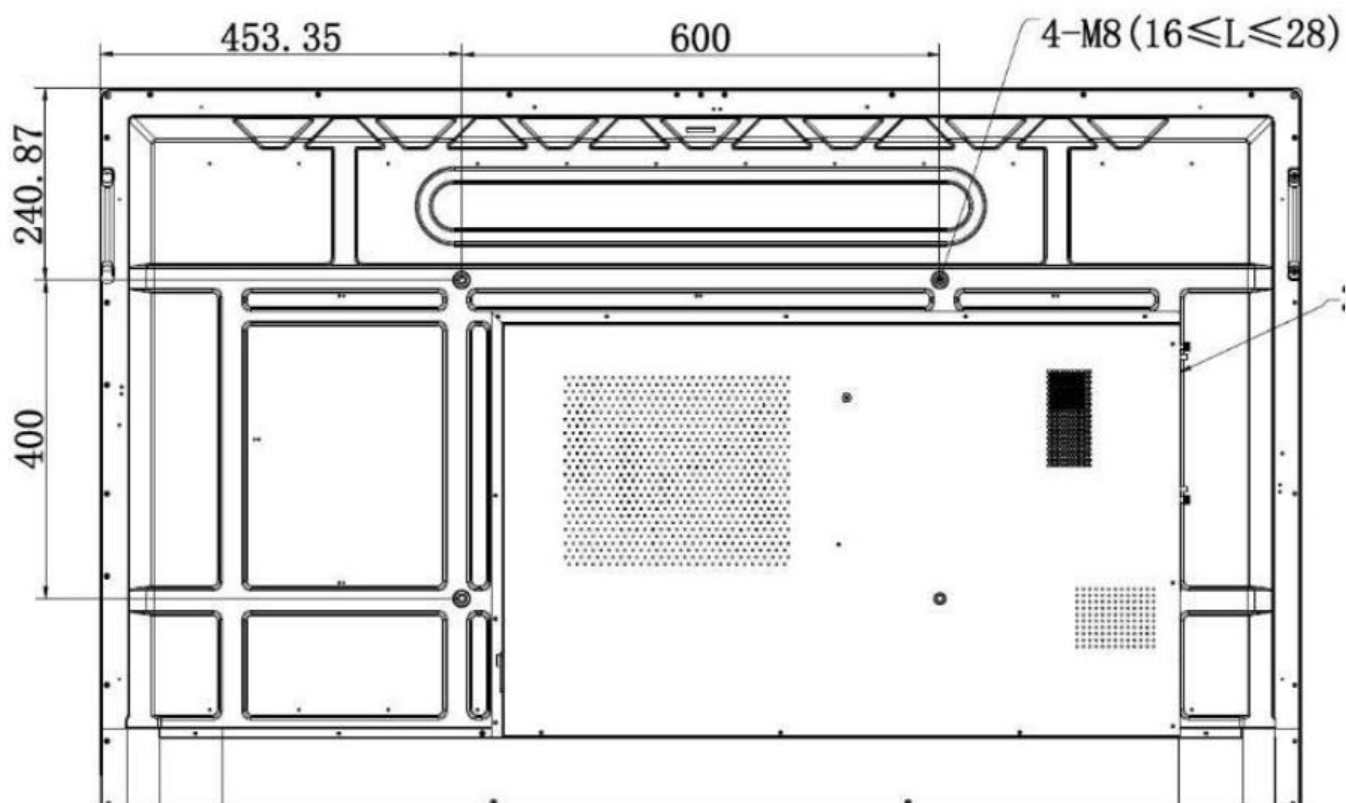

Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com