

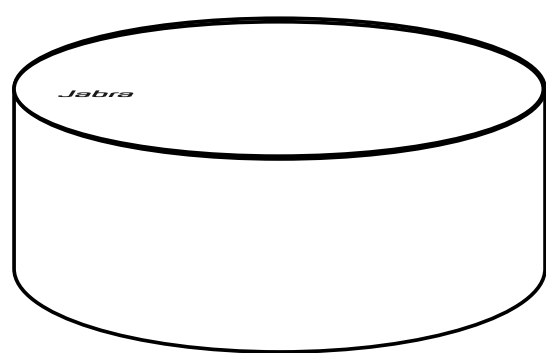


Jabra PanaCast SpeakerMic


Overview

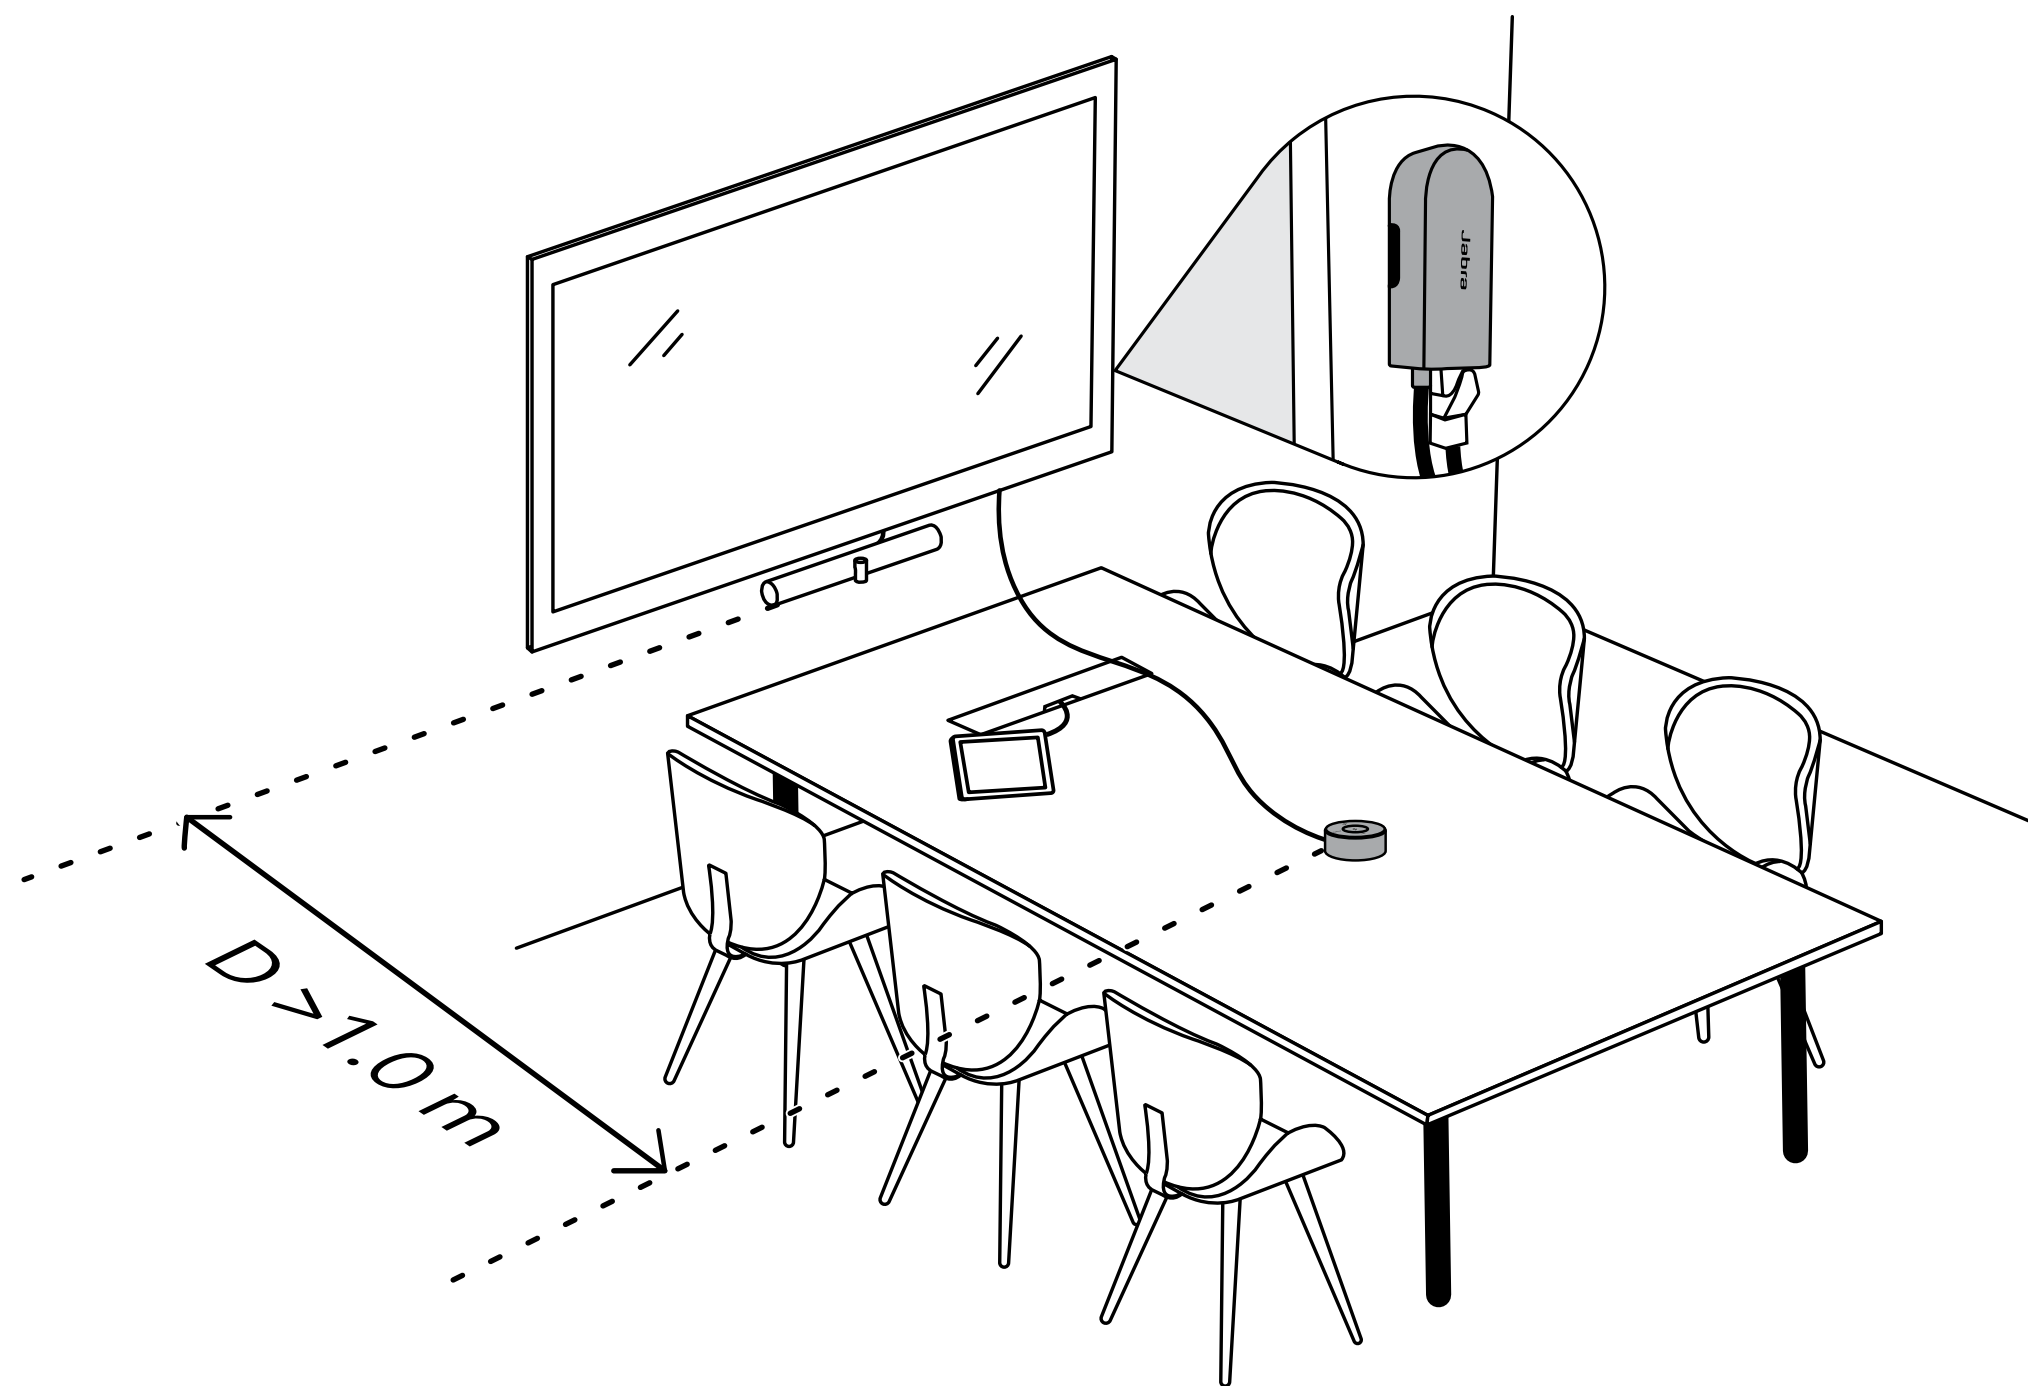


PanaCast SpeakerMic

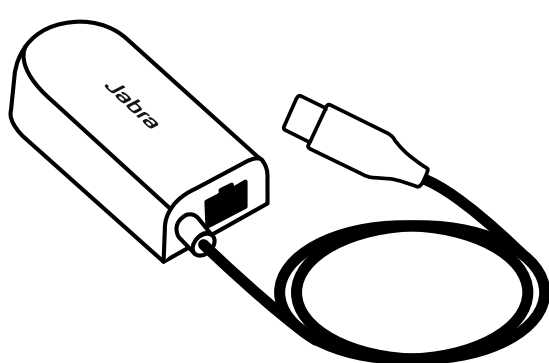


PanaCast SpeakerMic Adapter

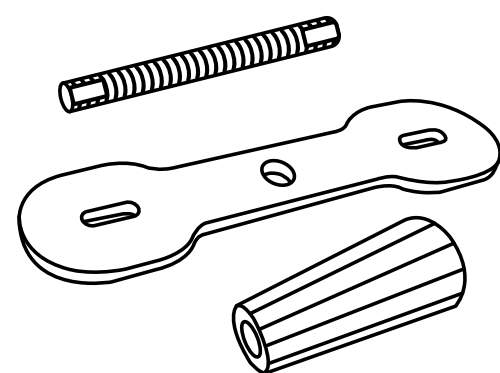


Grommet mount
(optional accessory)

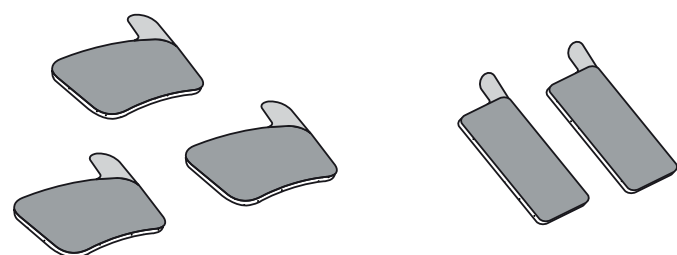


Mounting adhesives

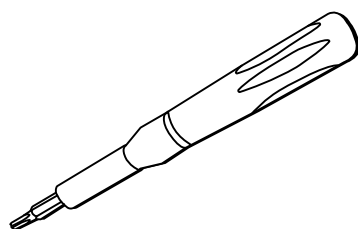

Screwdriver
(not included)



3.5mm screw(2)
(not included)



Cat6 cable
max. length 30m/98.4ft
(not included)

PanaCast SpeakerMic mounting

Cable through the table

Grommet mount..... 03

Screws 07

Mounting adhesives 10

Cable on the table

Screws 13

Mounting adhesives 16

PanaCast SpeakerMic Adapter mounting


Cabling

Restarting


Factory reset

Cable through table


(Grommet mount - optional accessory)

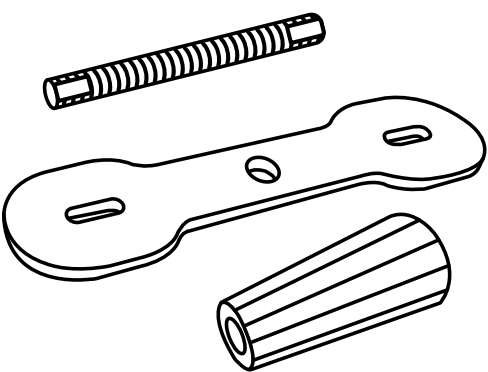


1

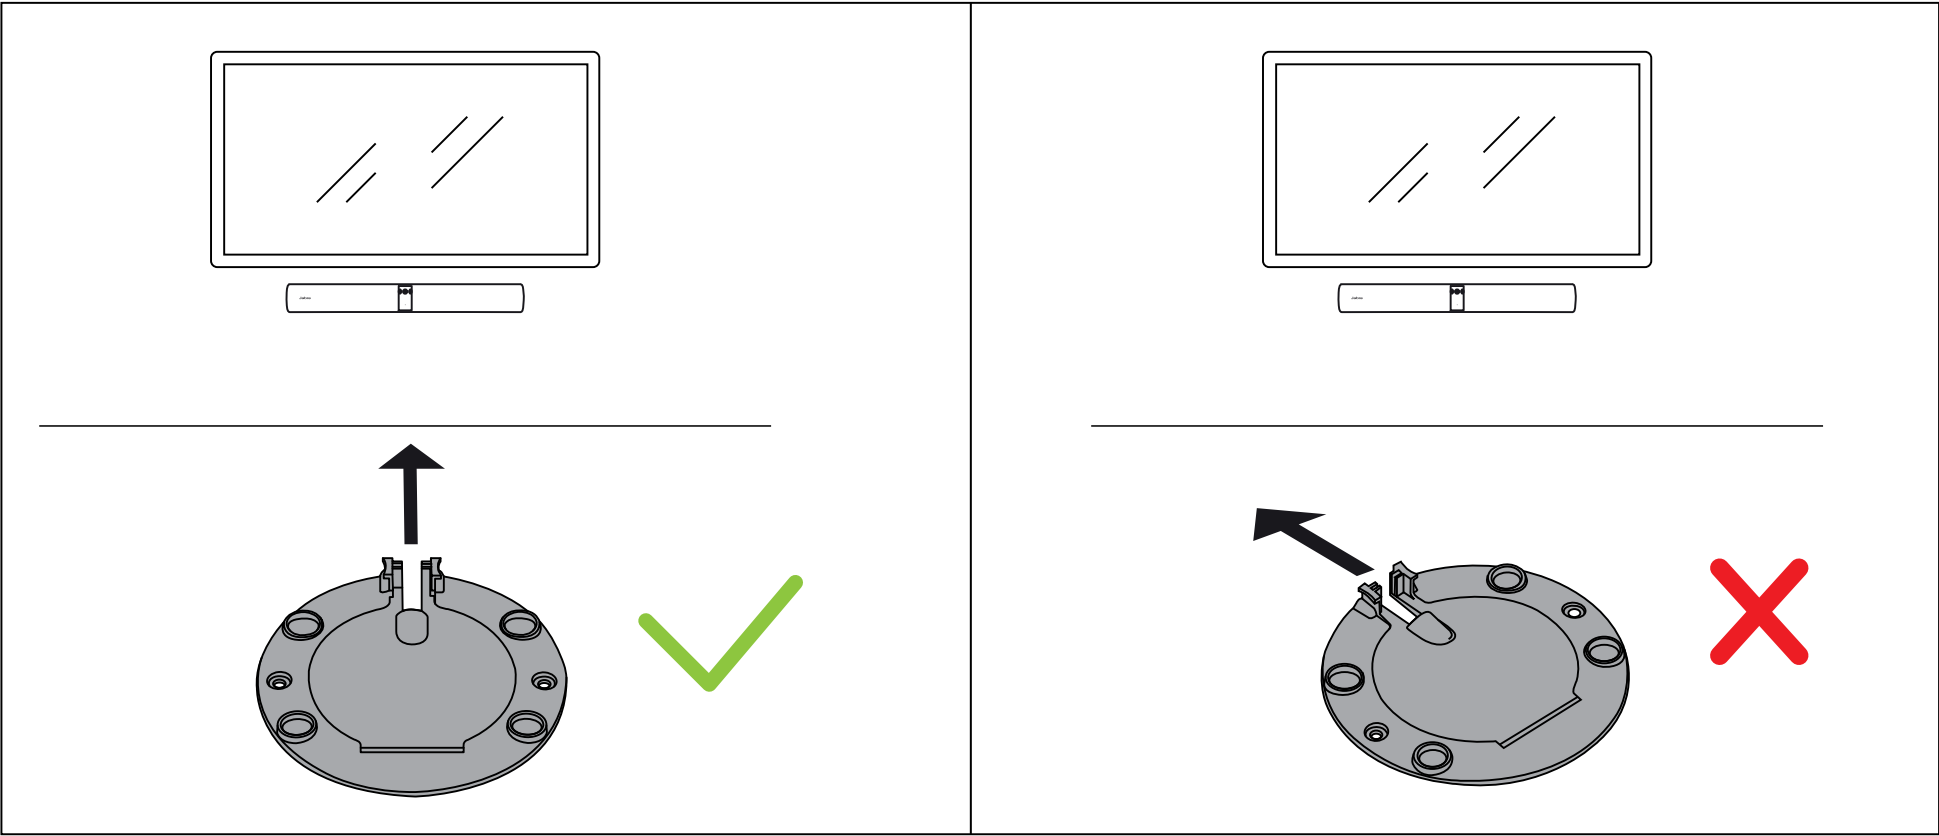


2

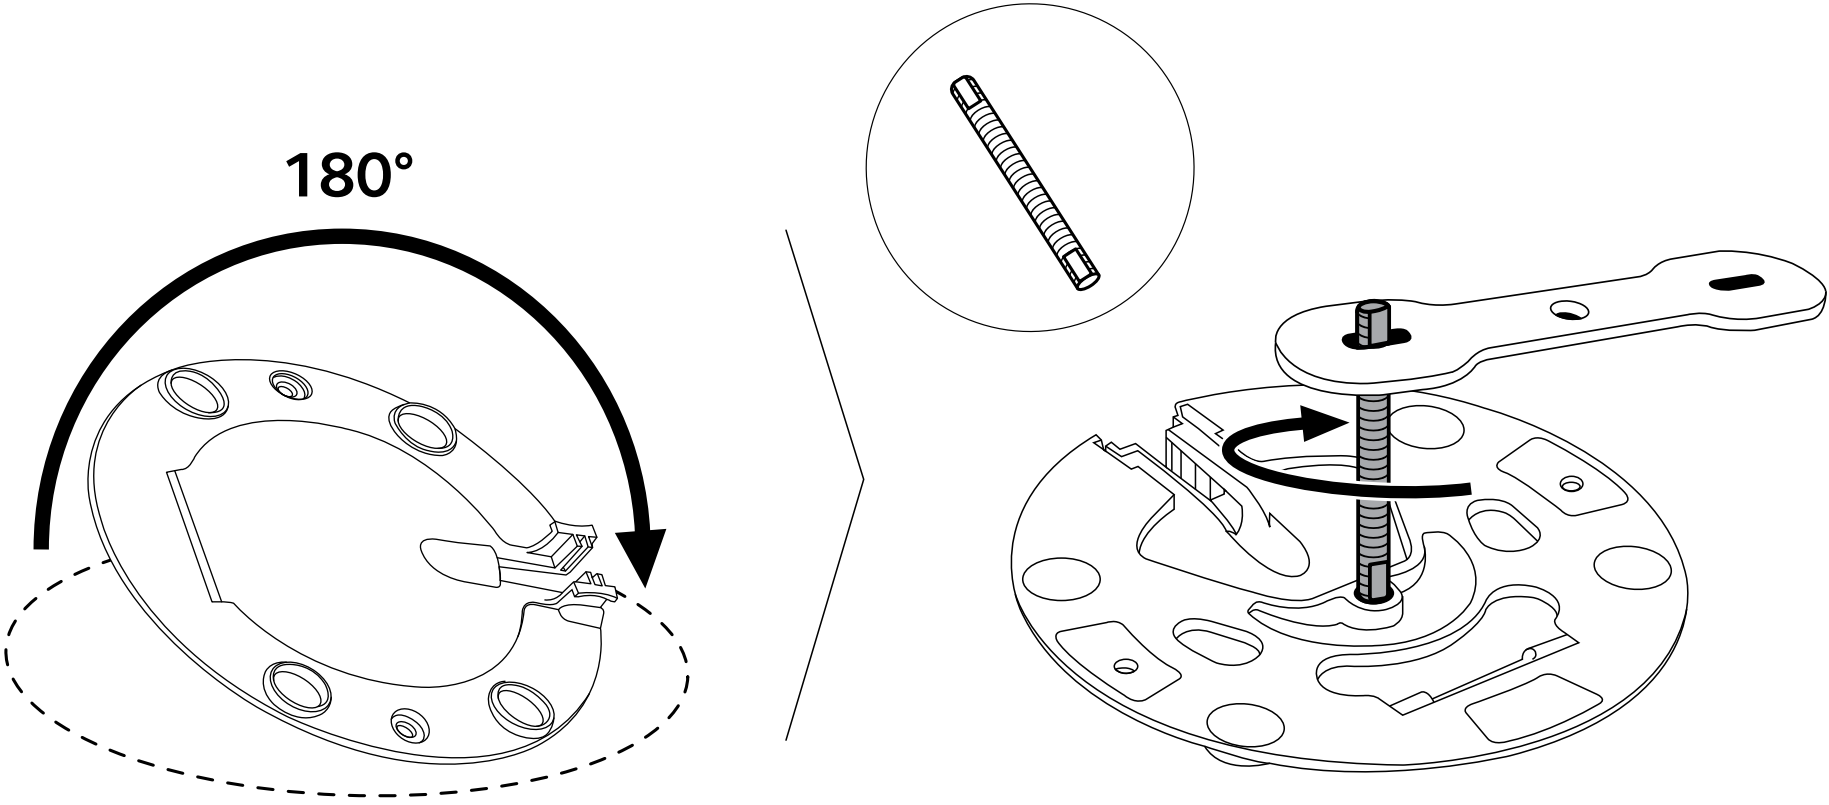


3

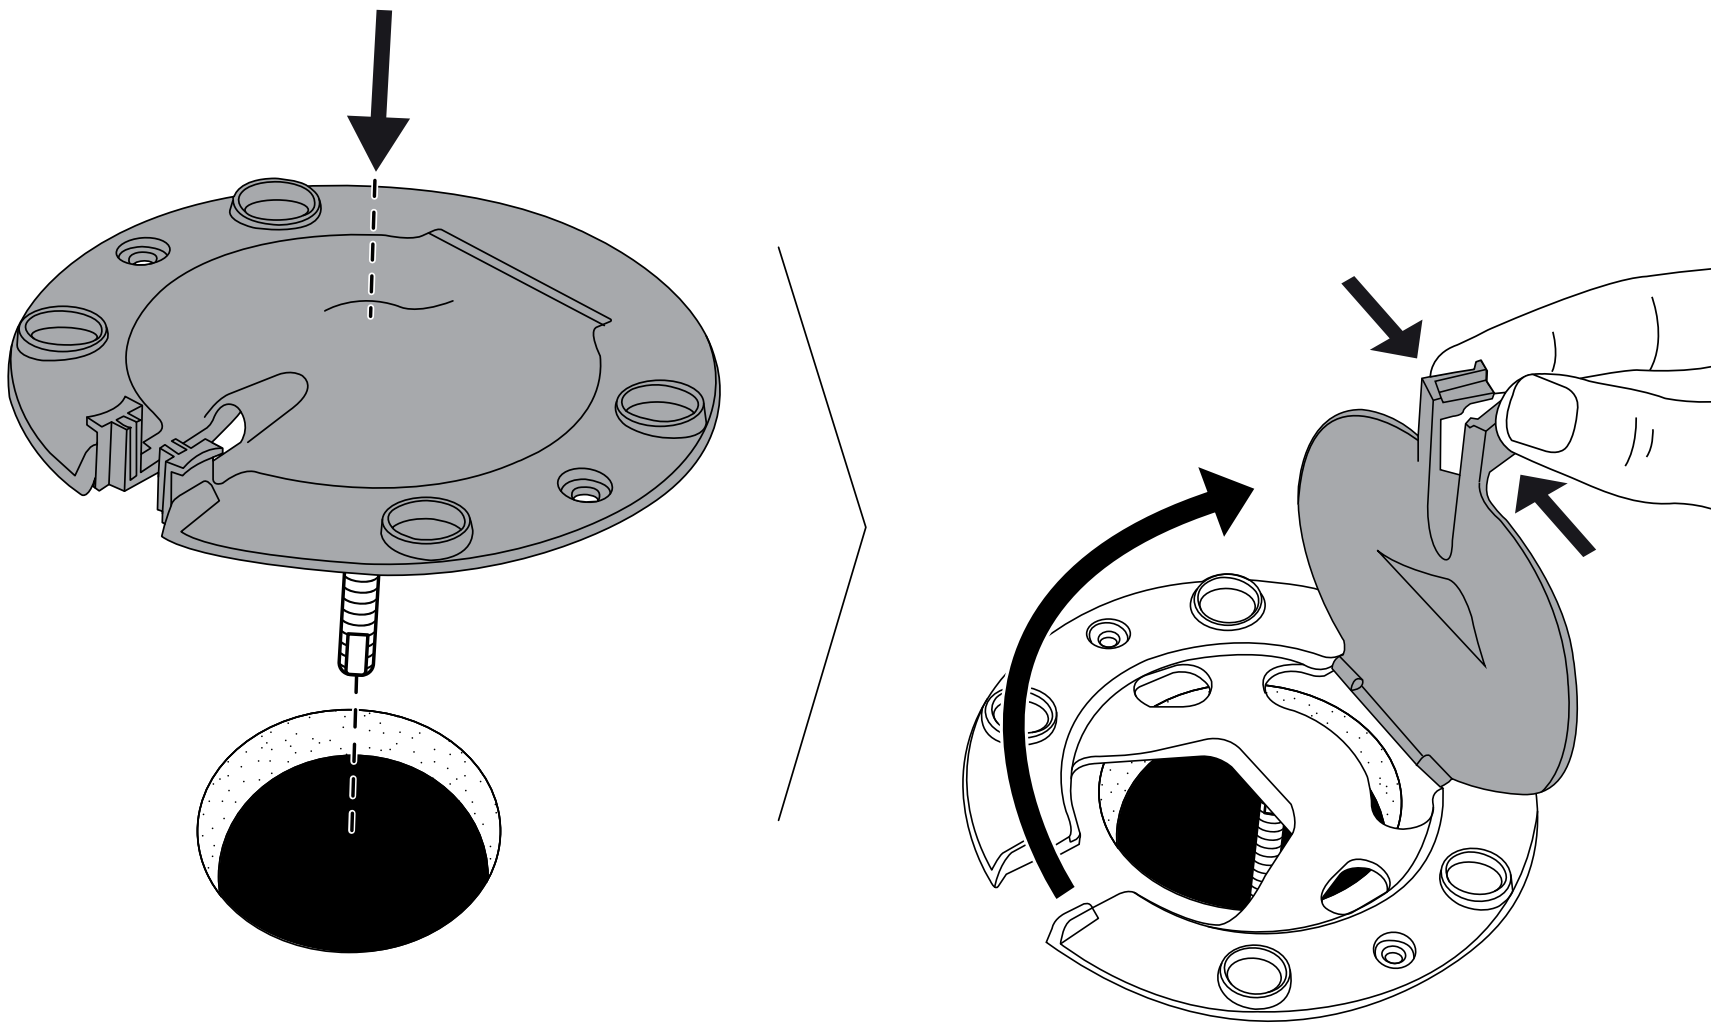


4

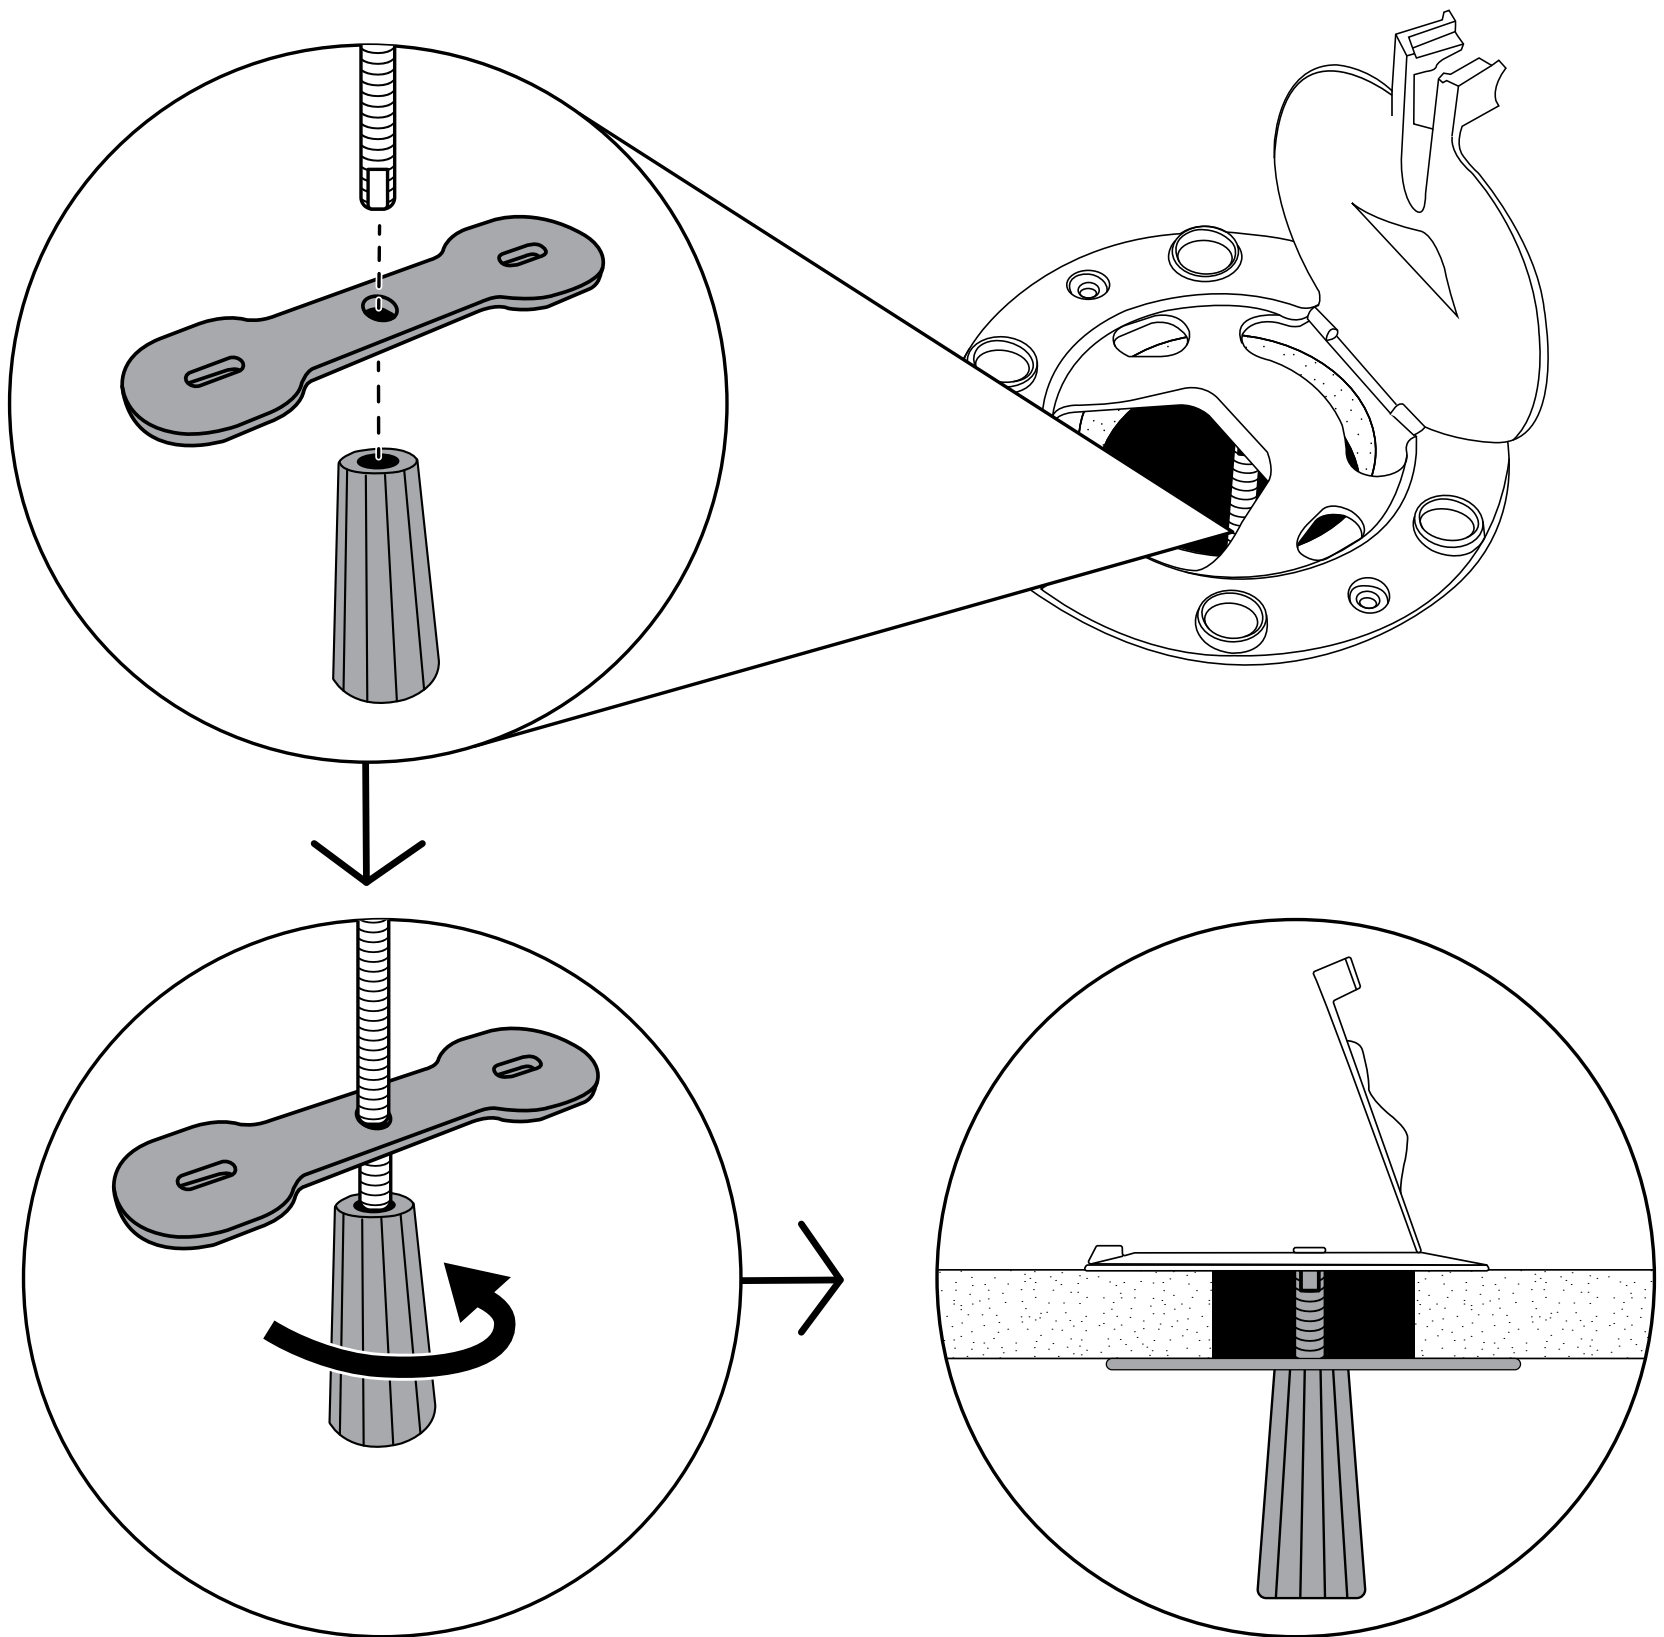




5

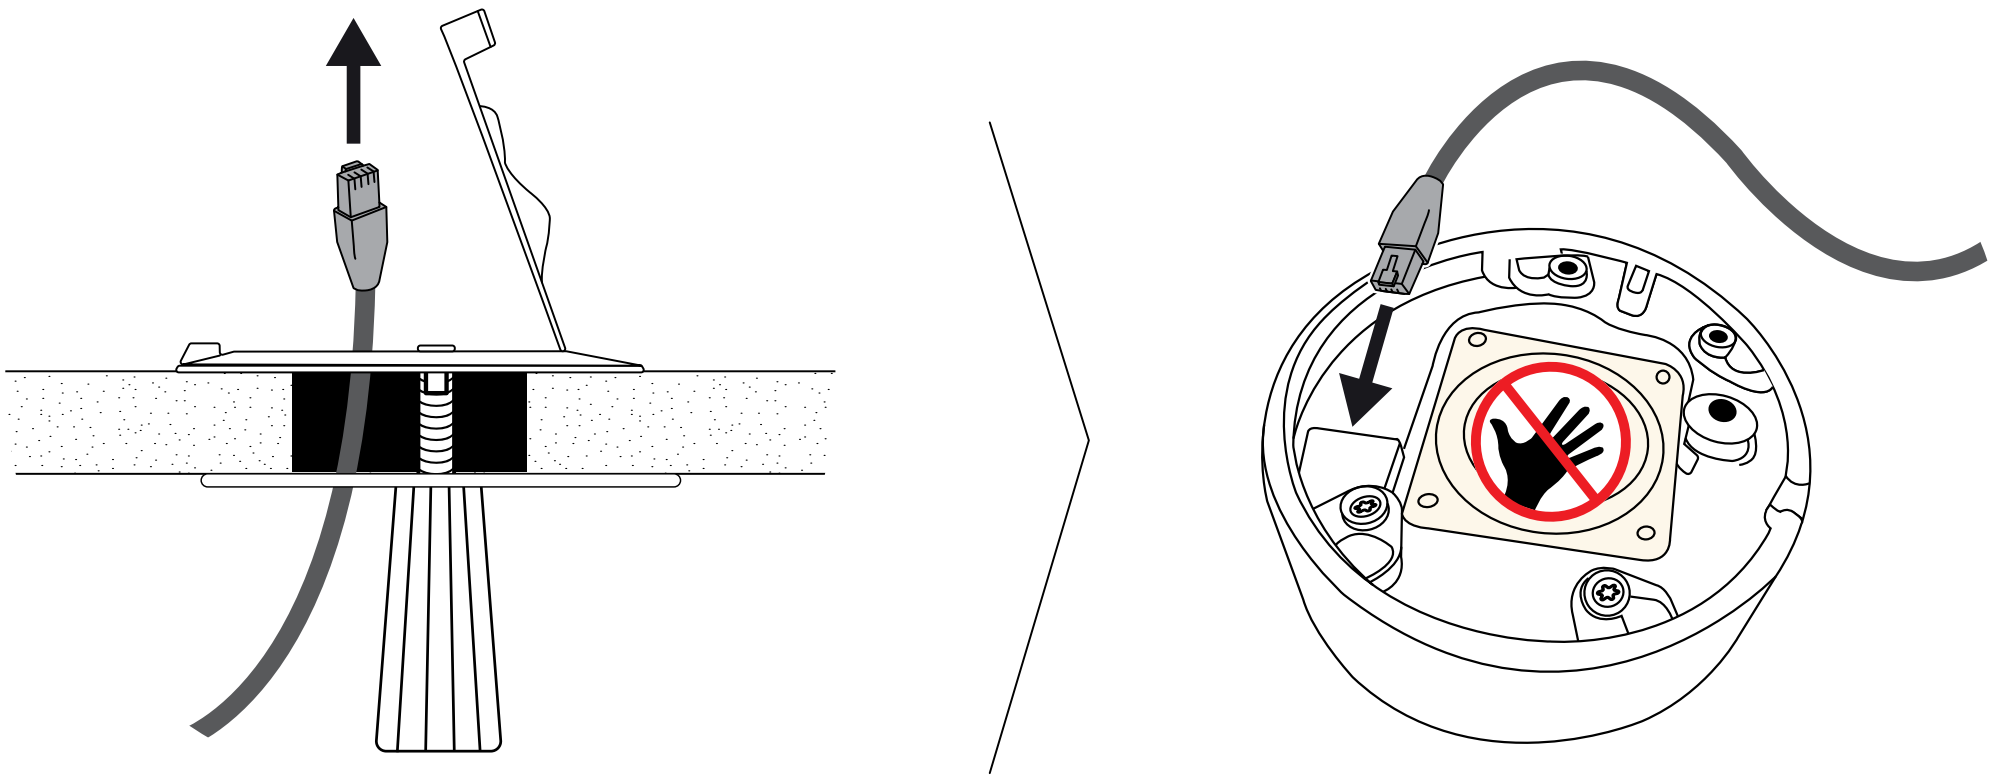

6

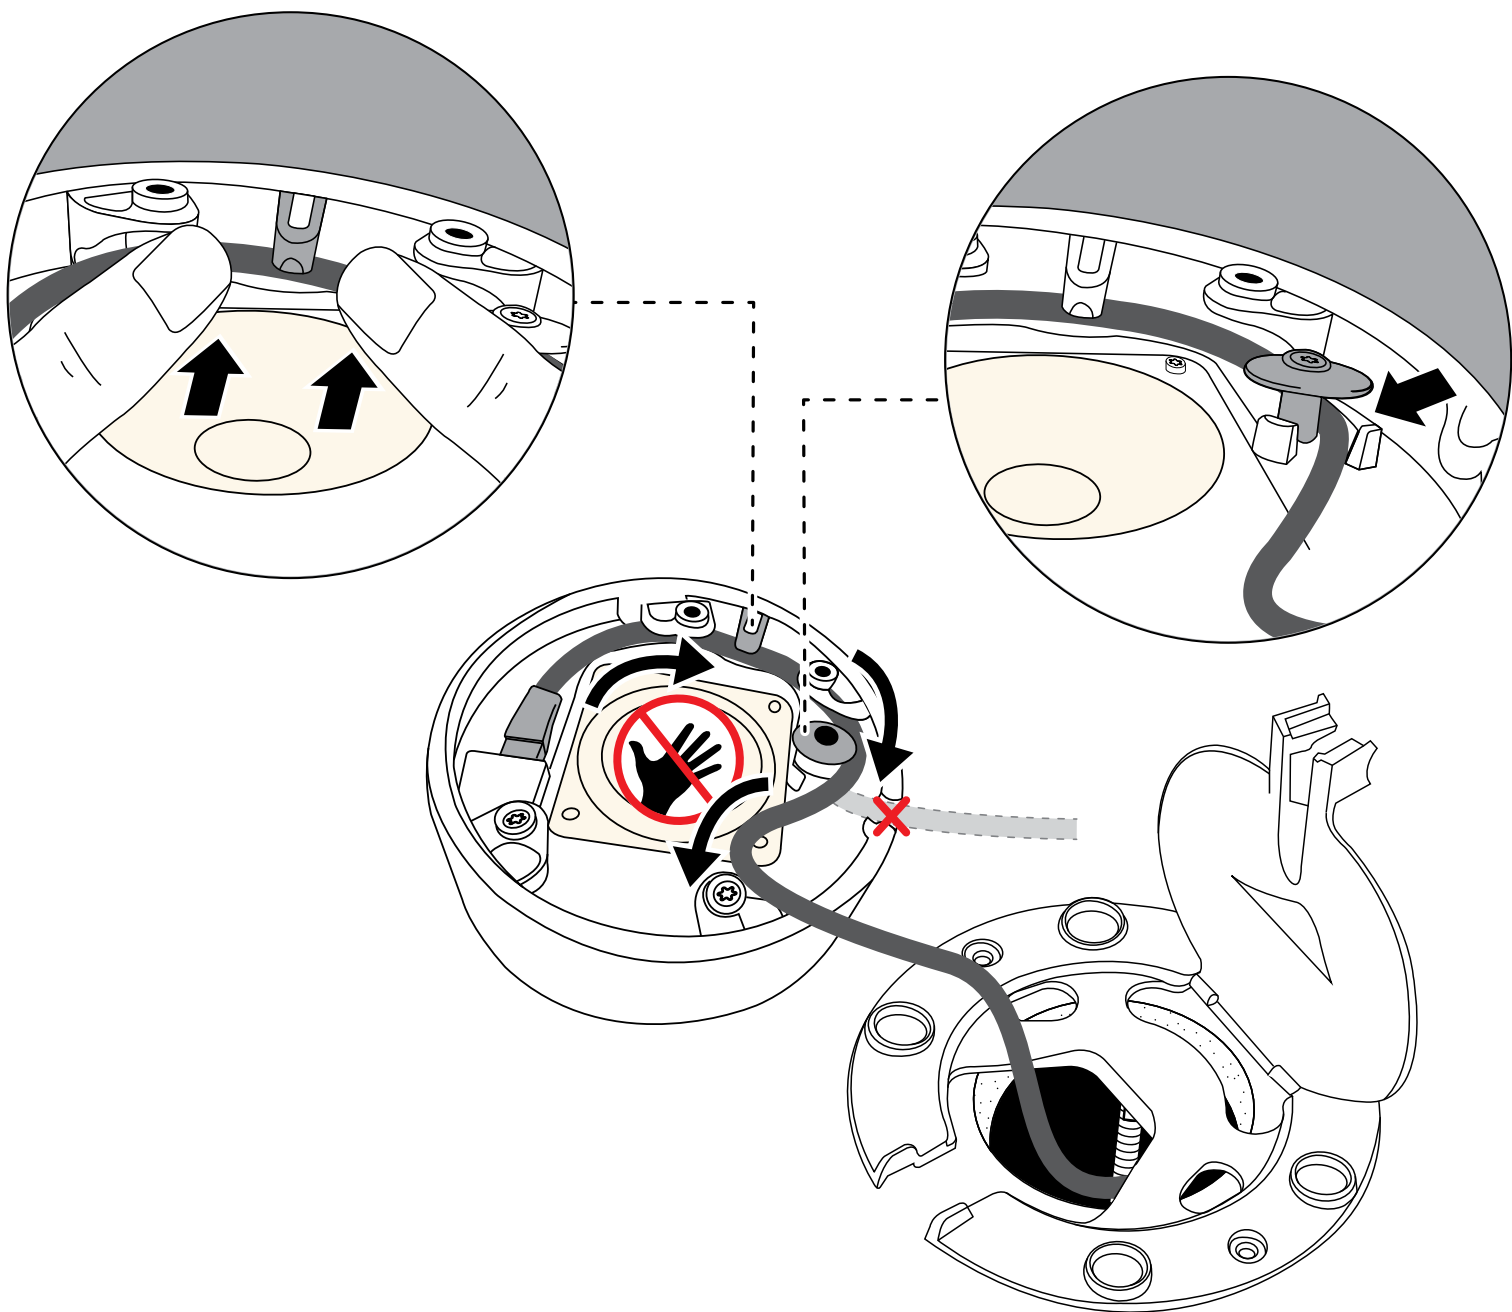


7

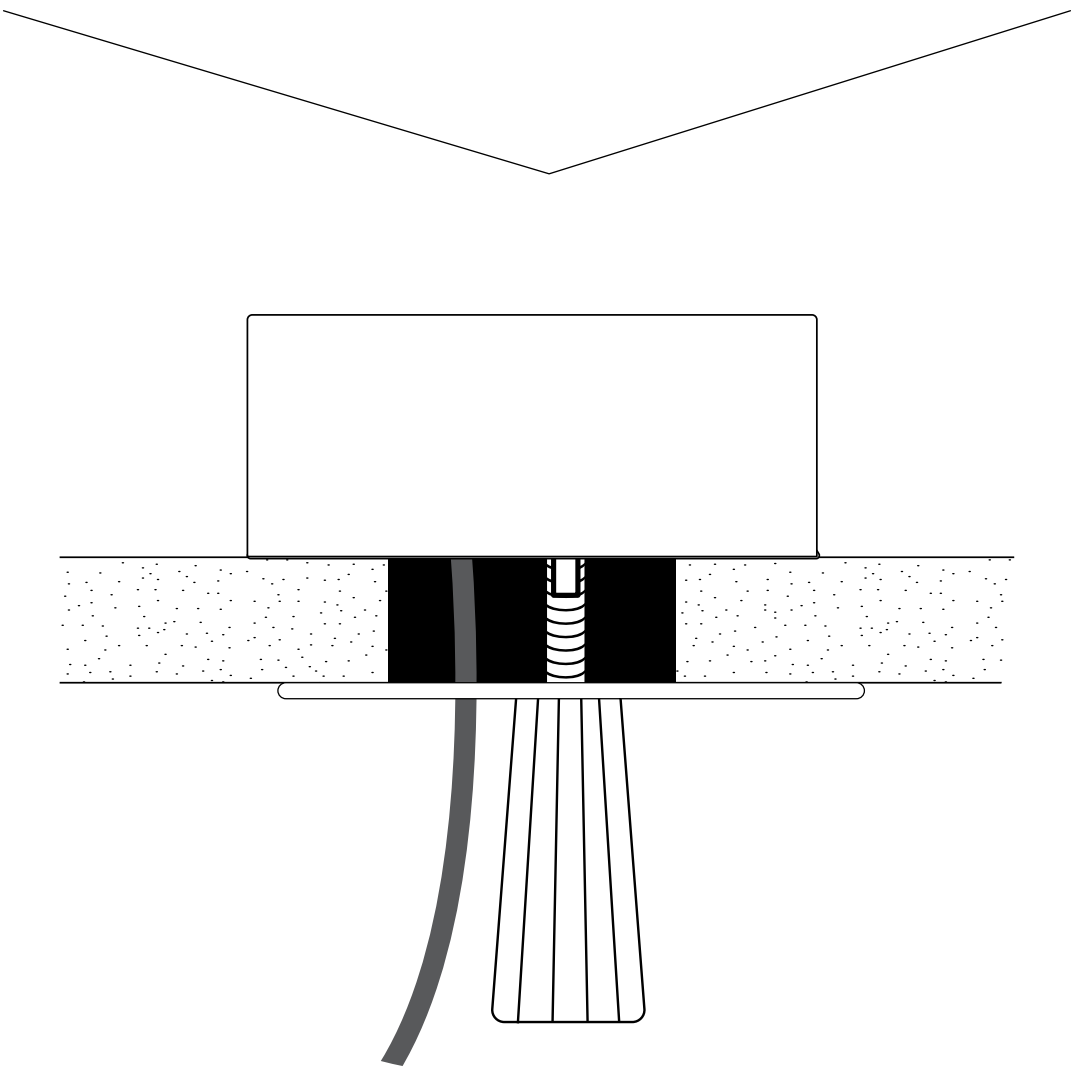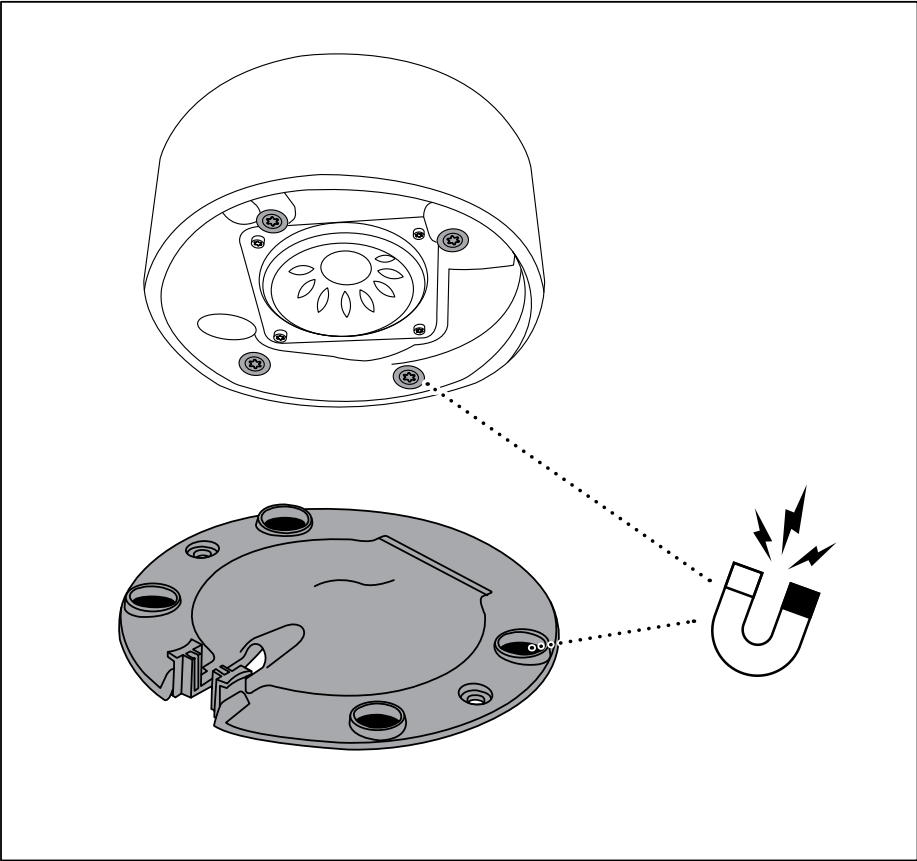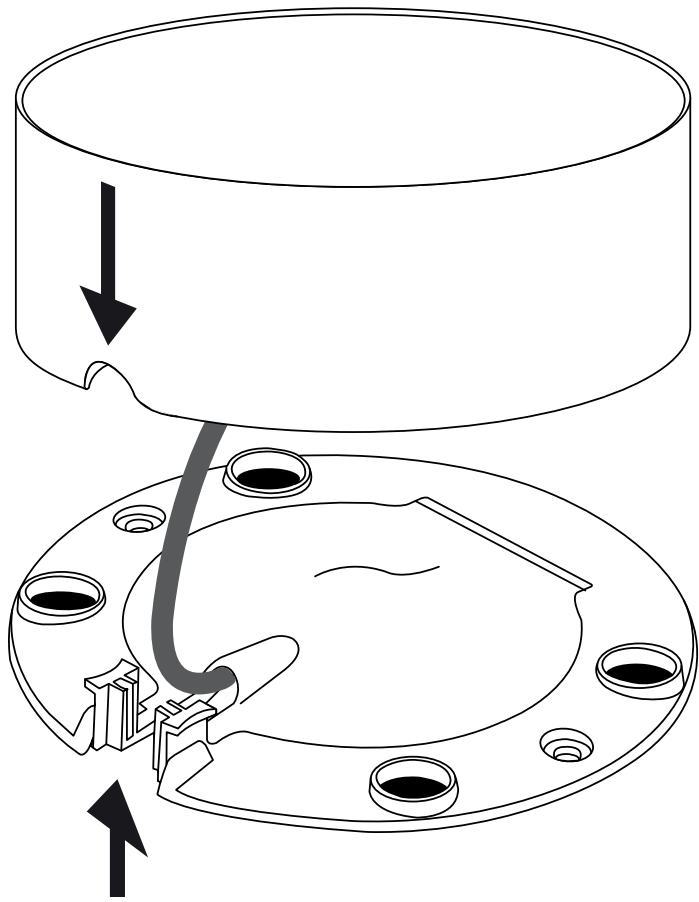


Cable through table


(Screws - not included)




1

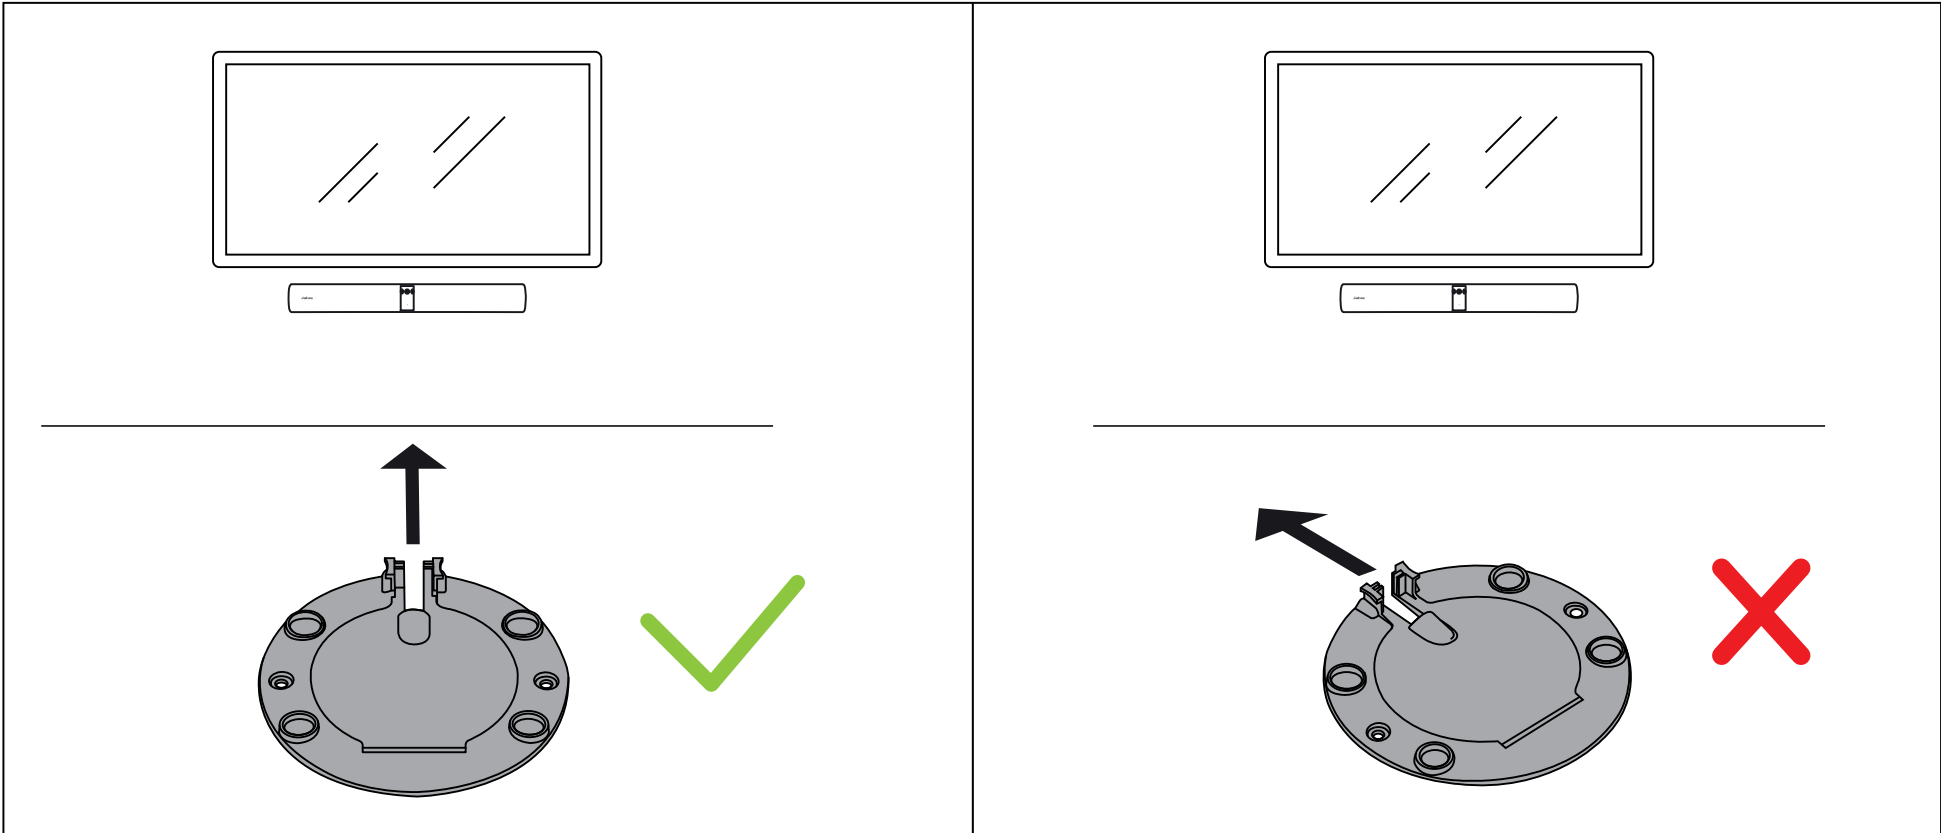




2

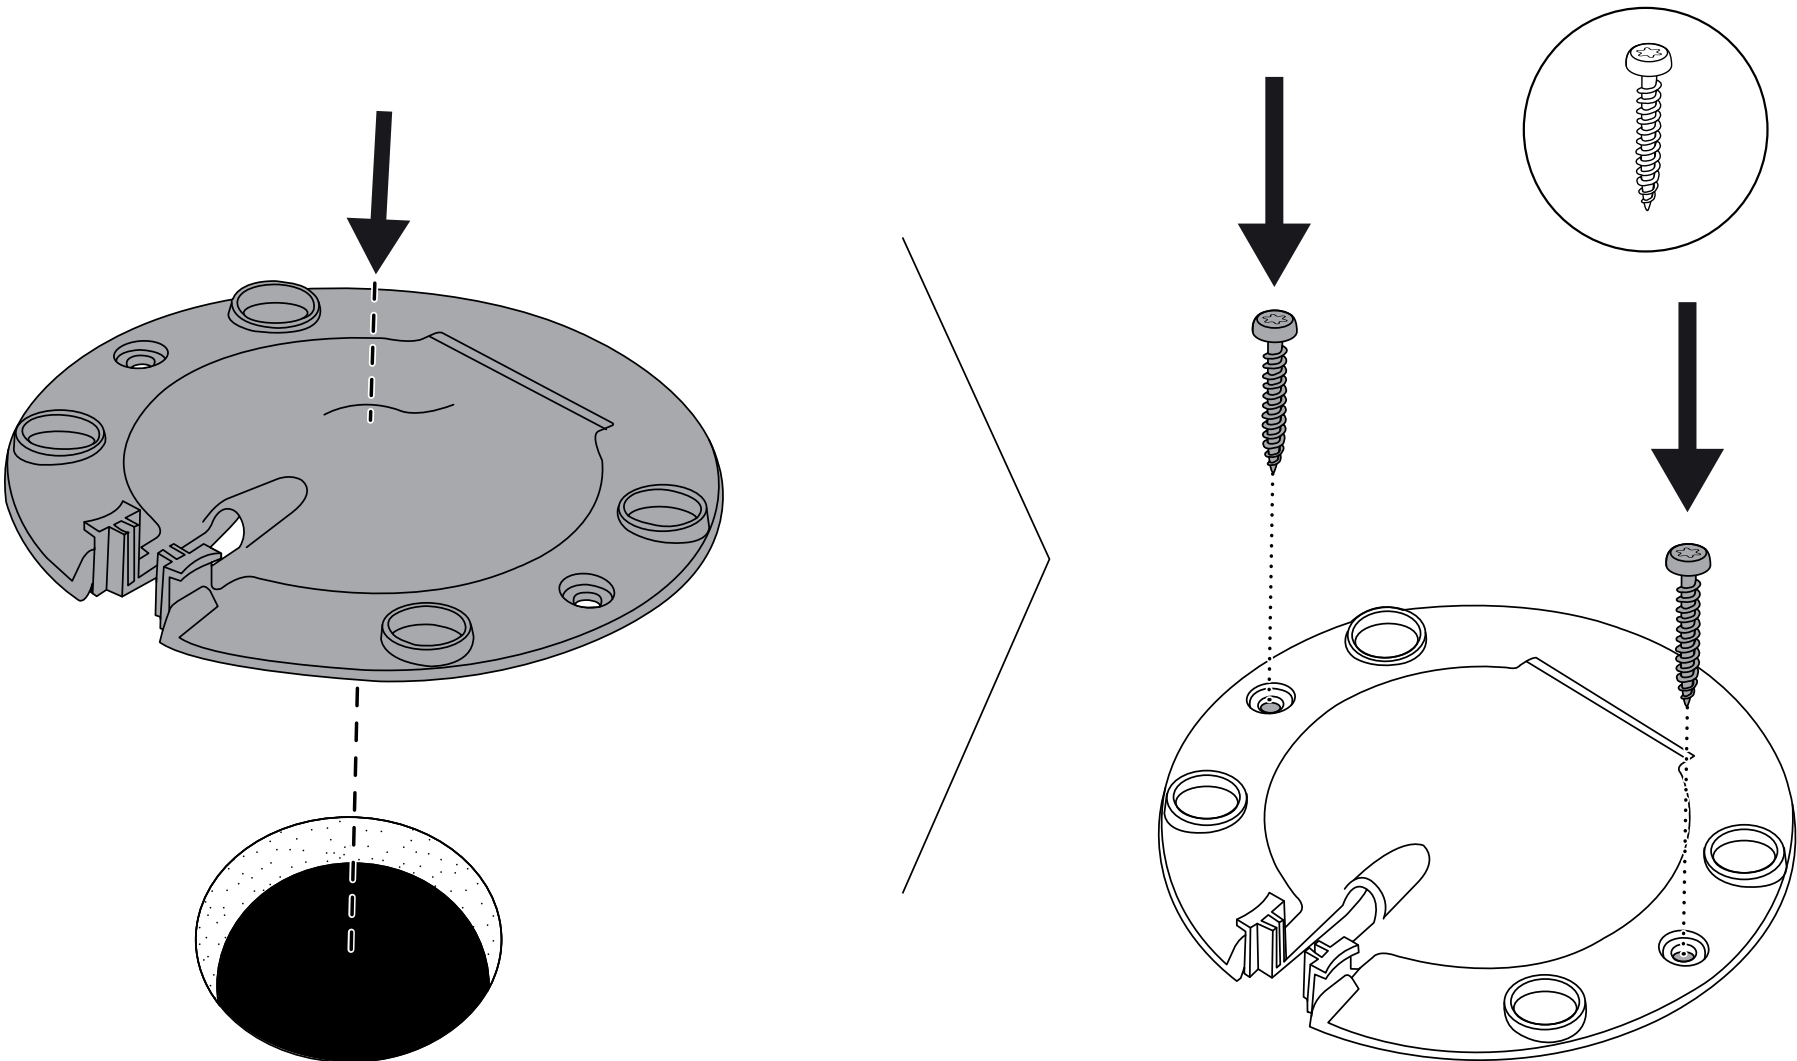




3

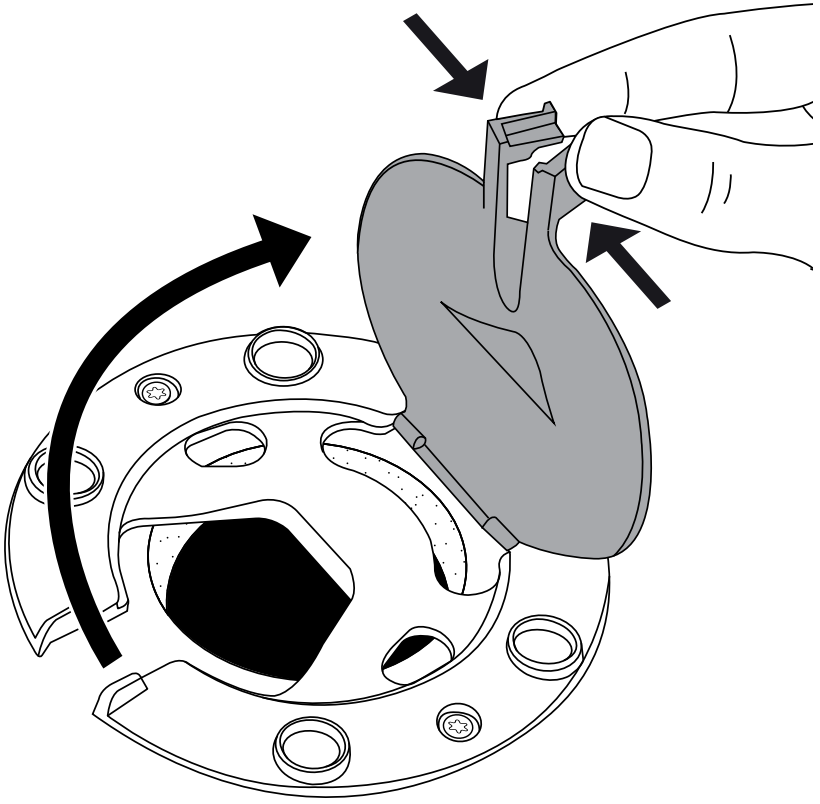




4

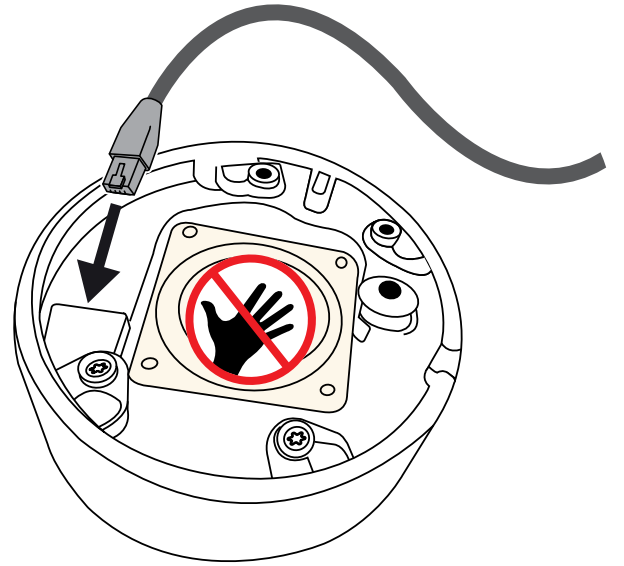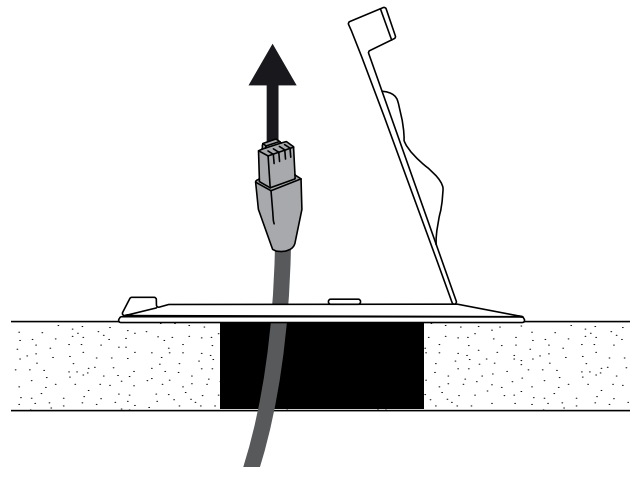

5

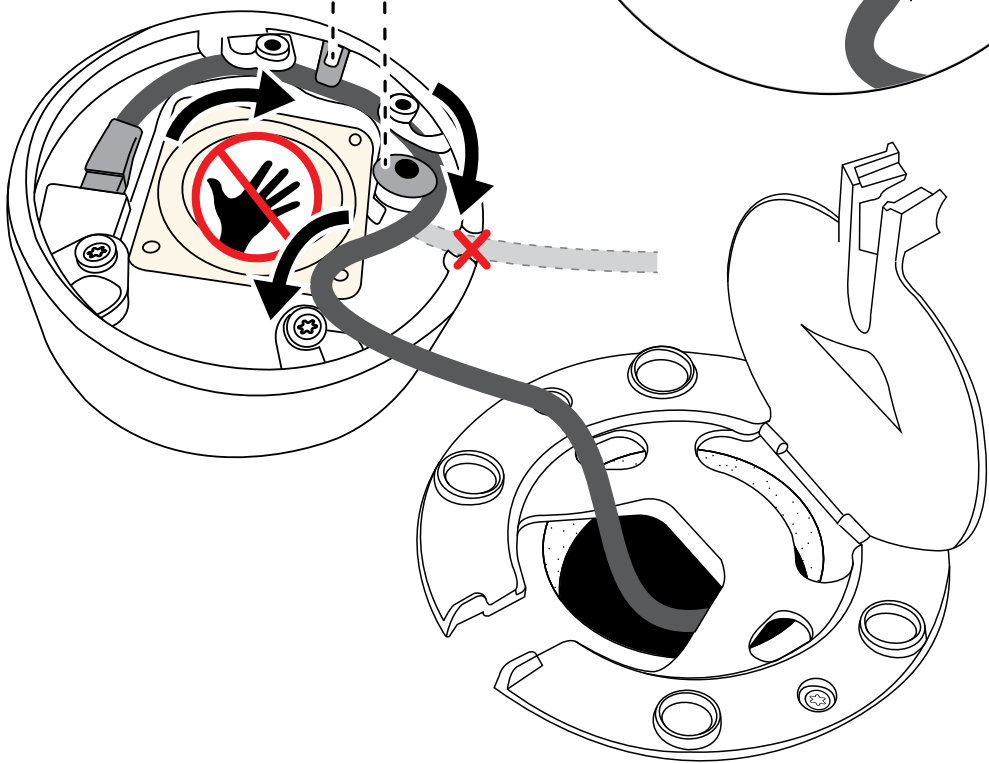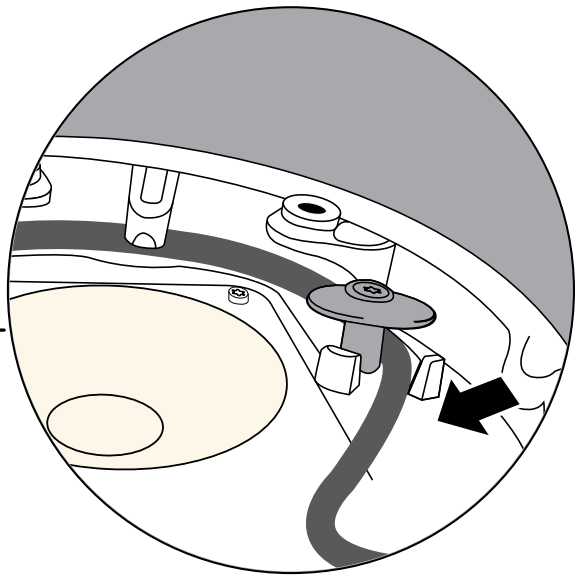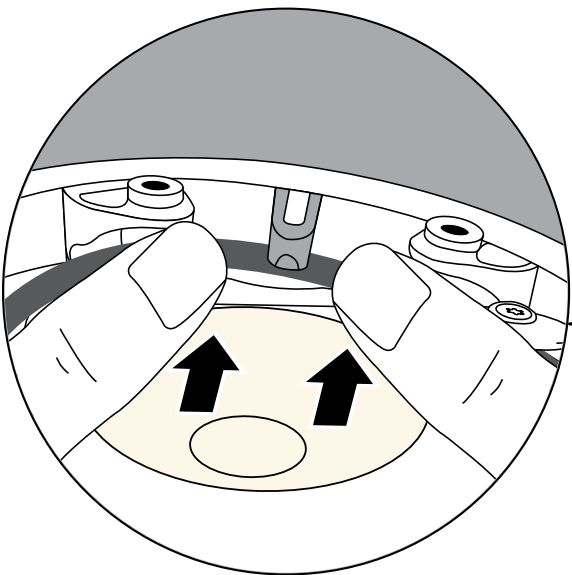


6

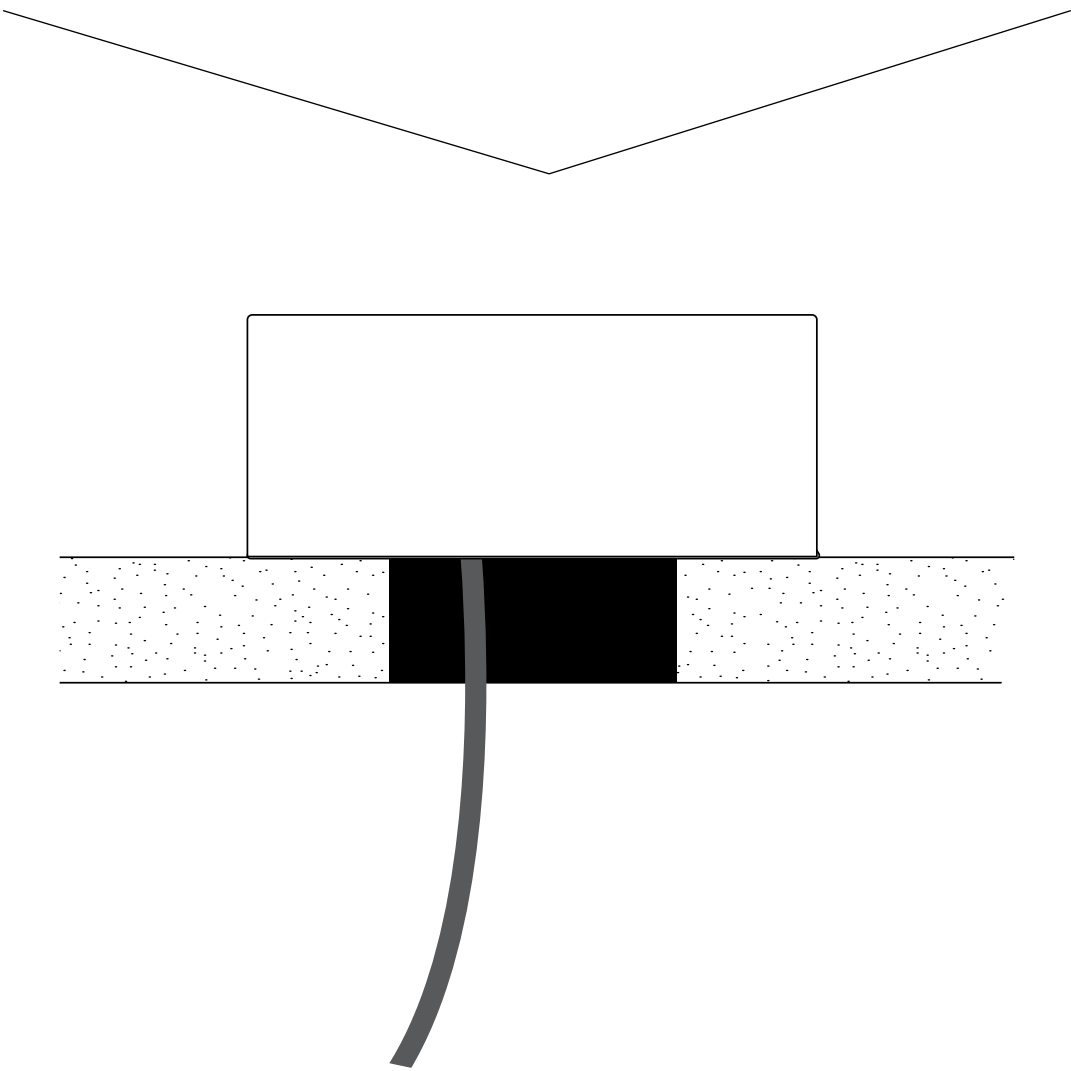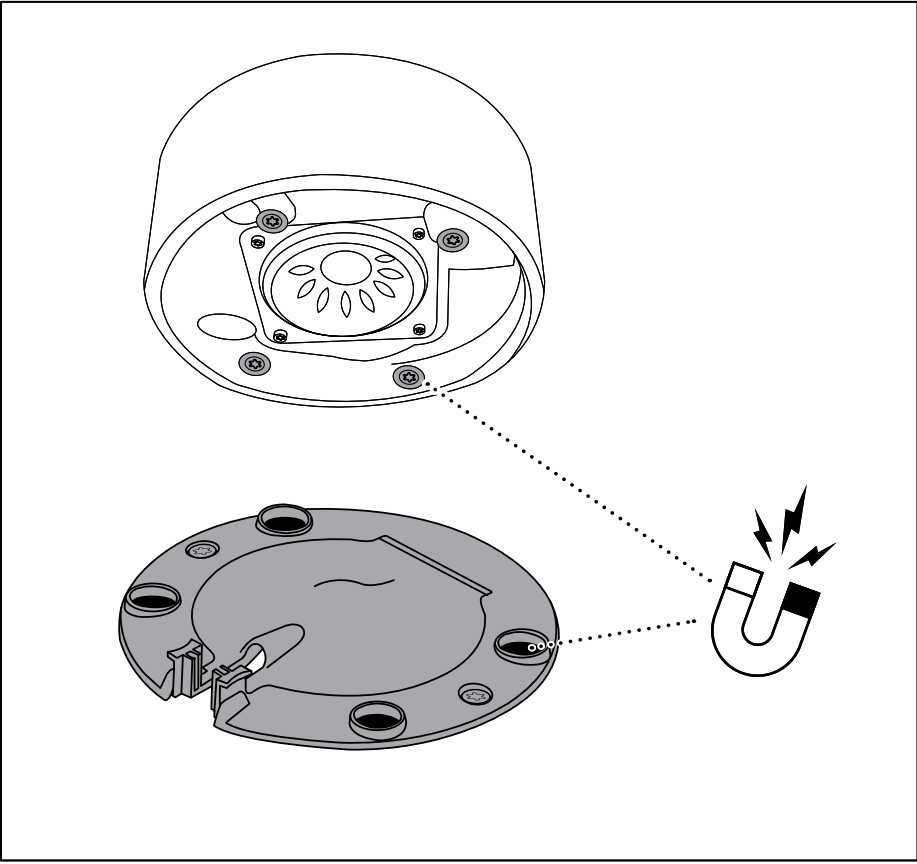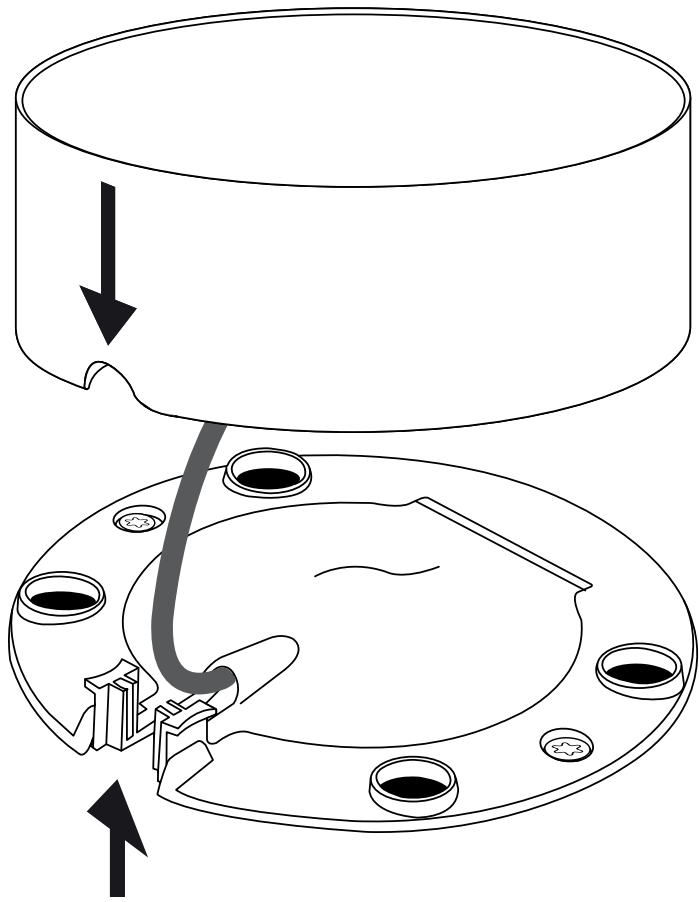


Cable through table



(Mounting adhesives)




1

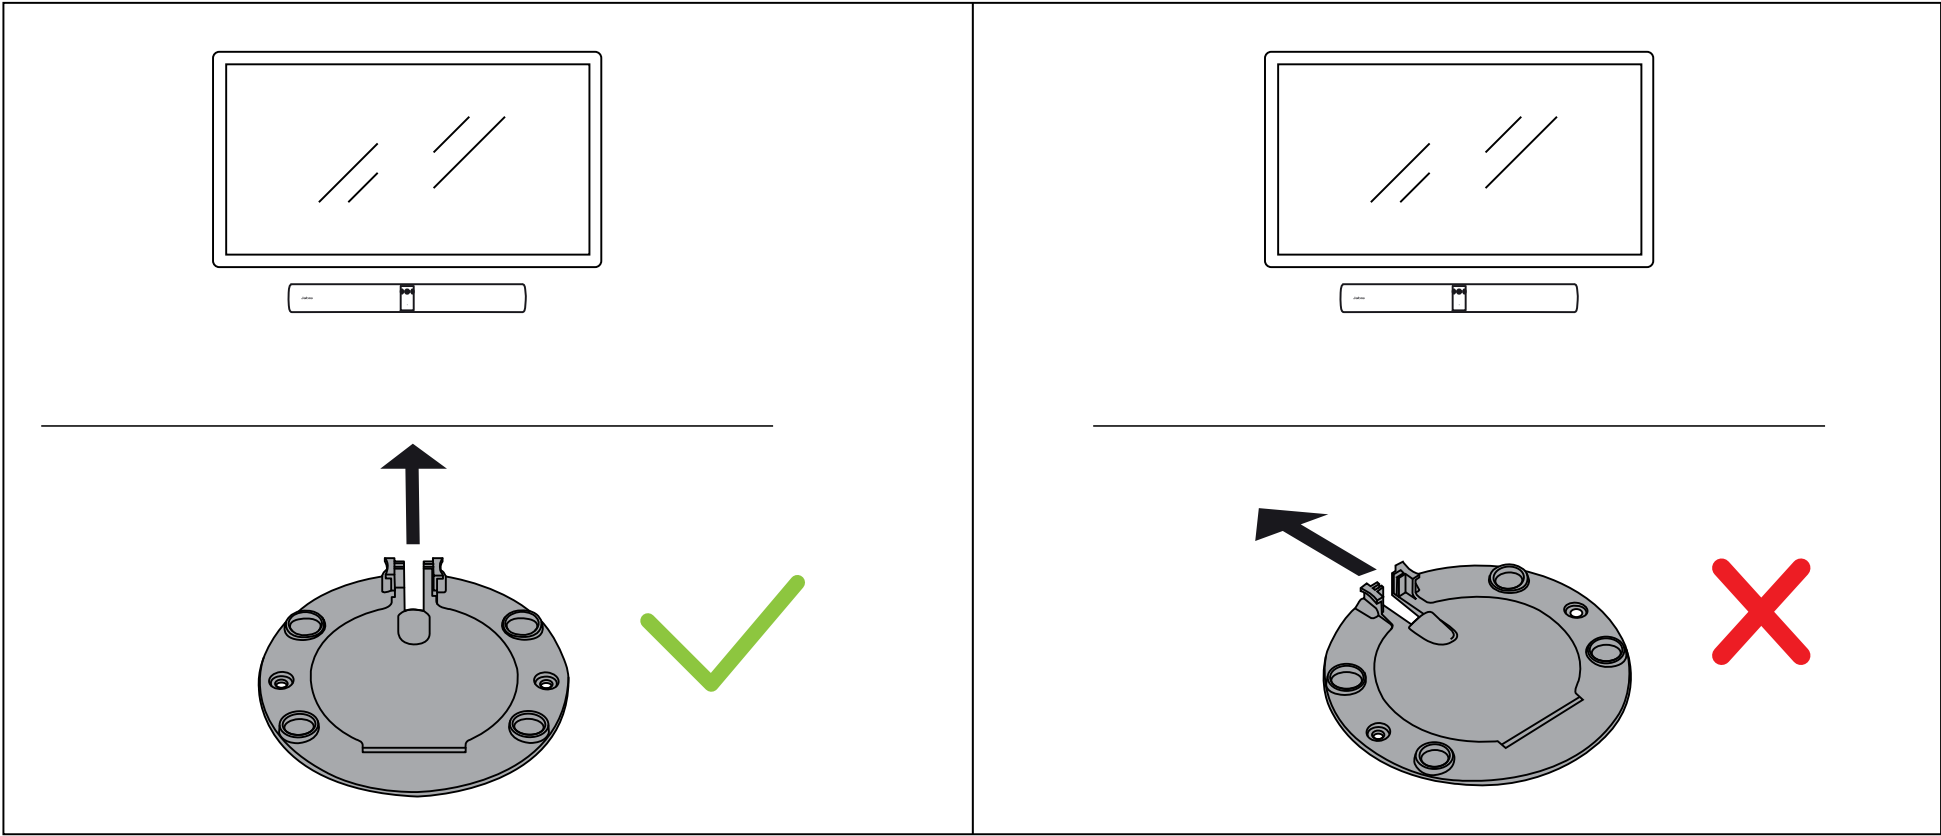


2

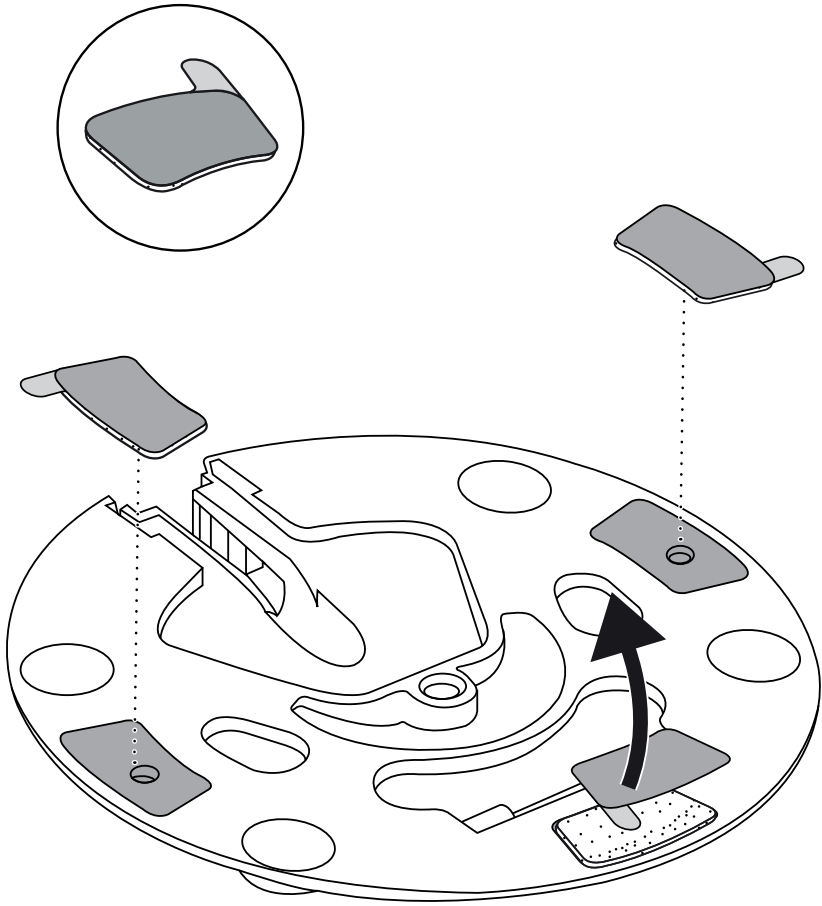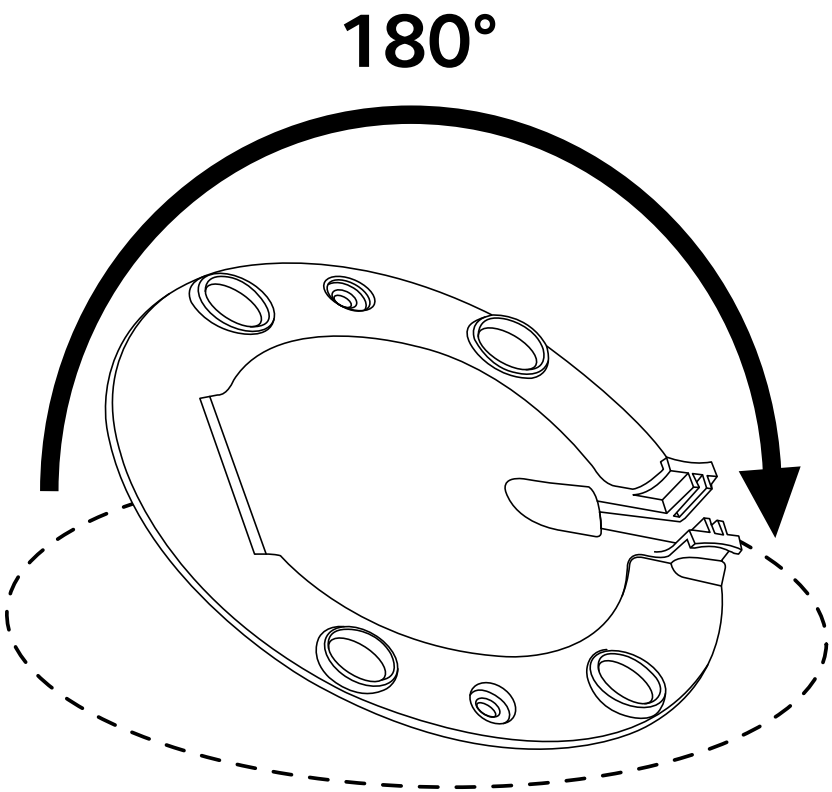


3

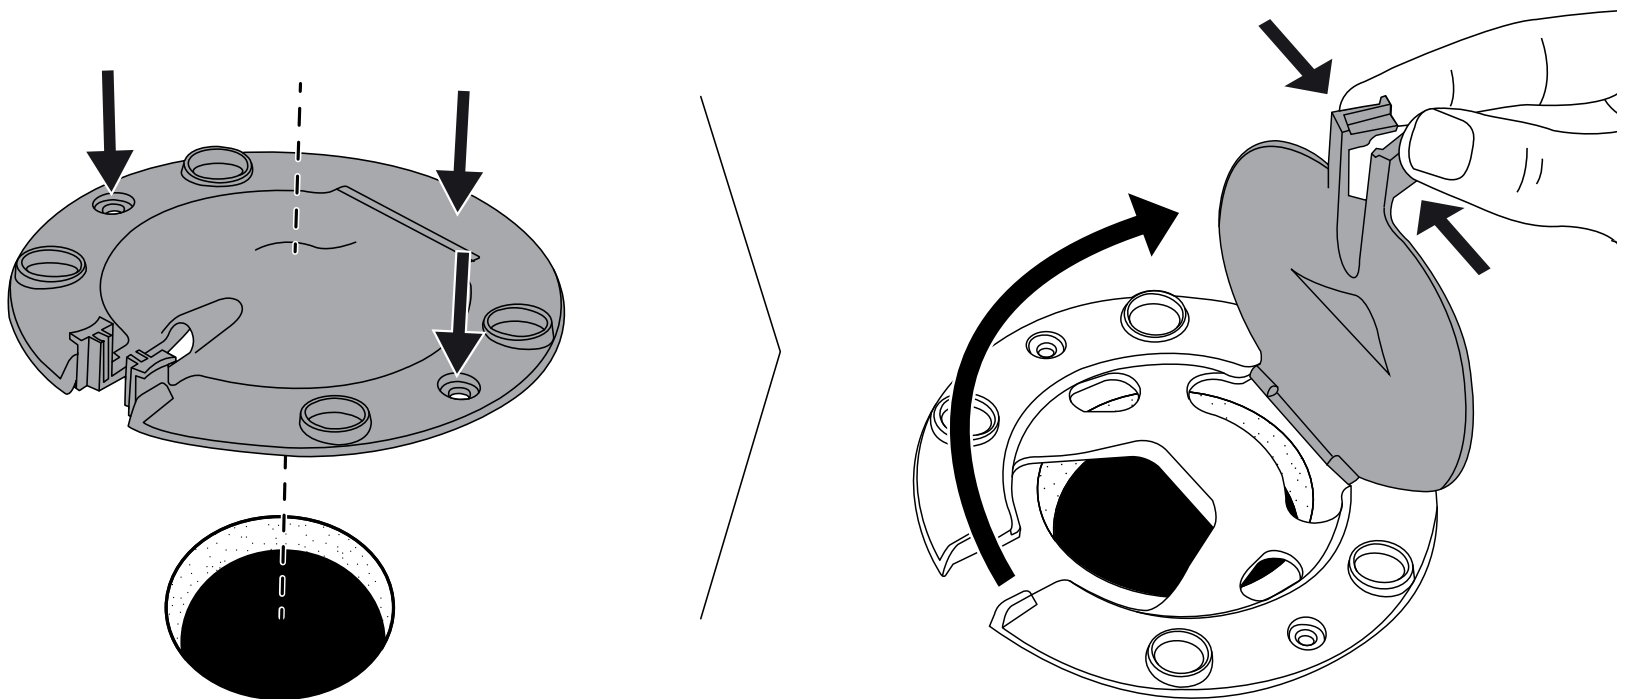




4

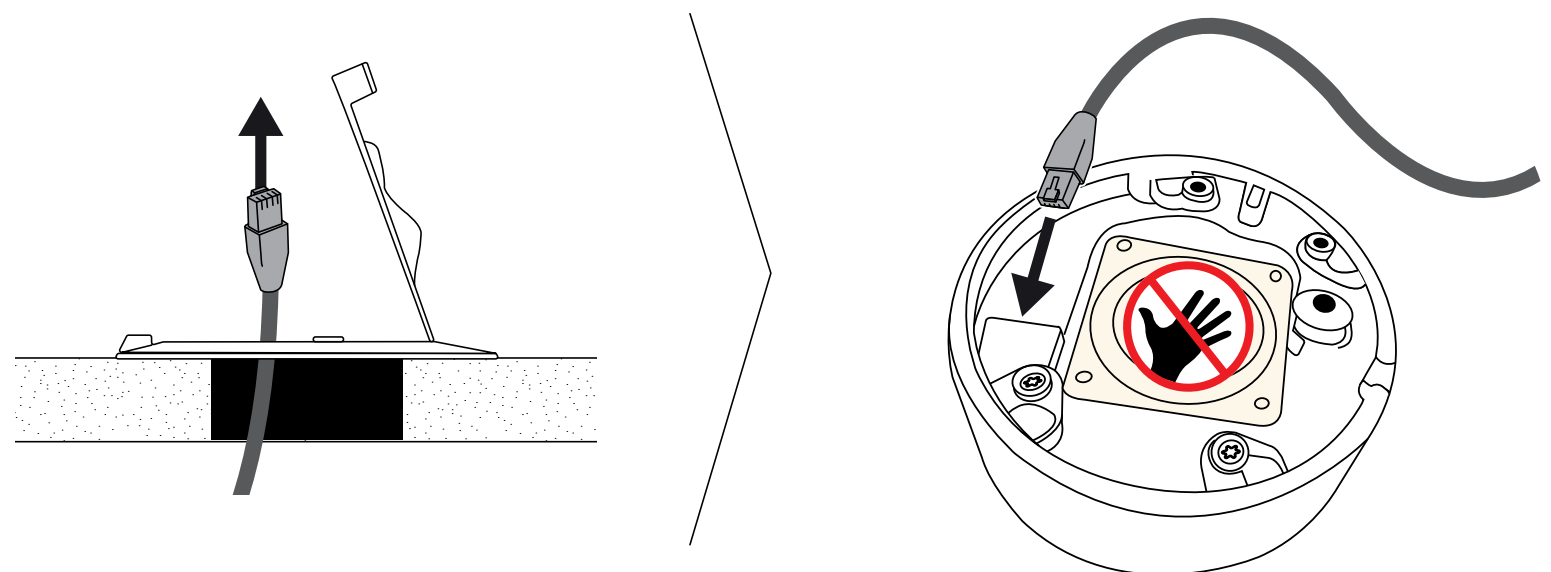

5

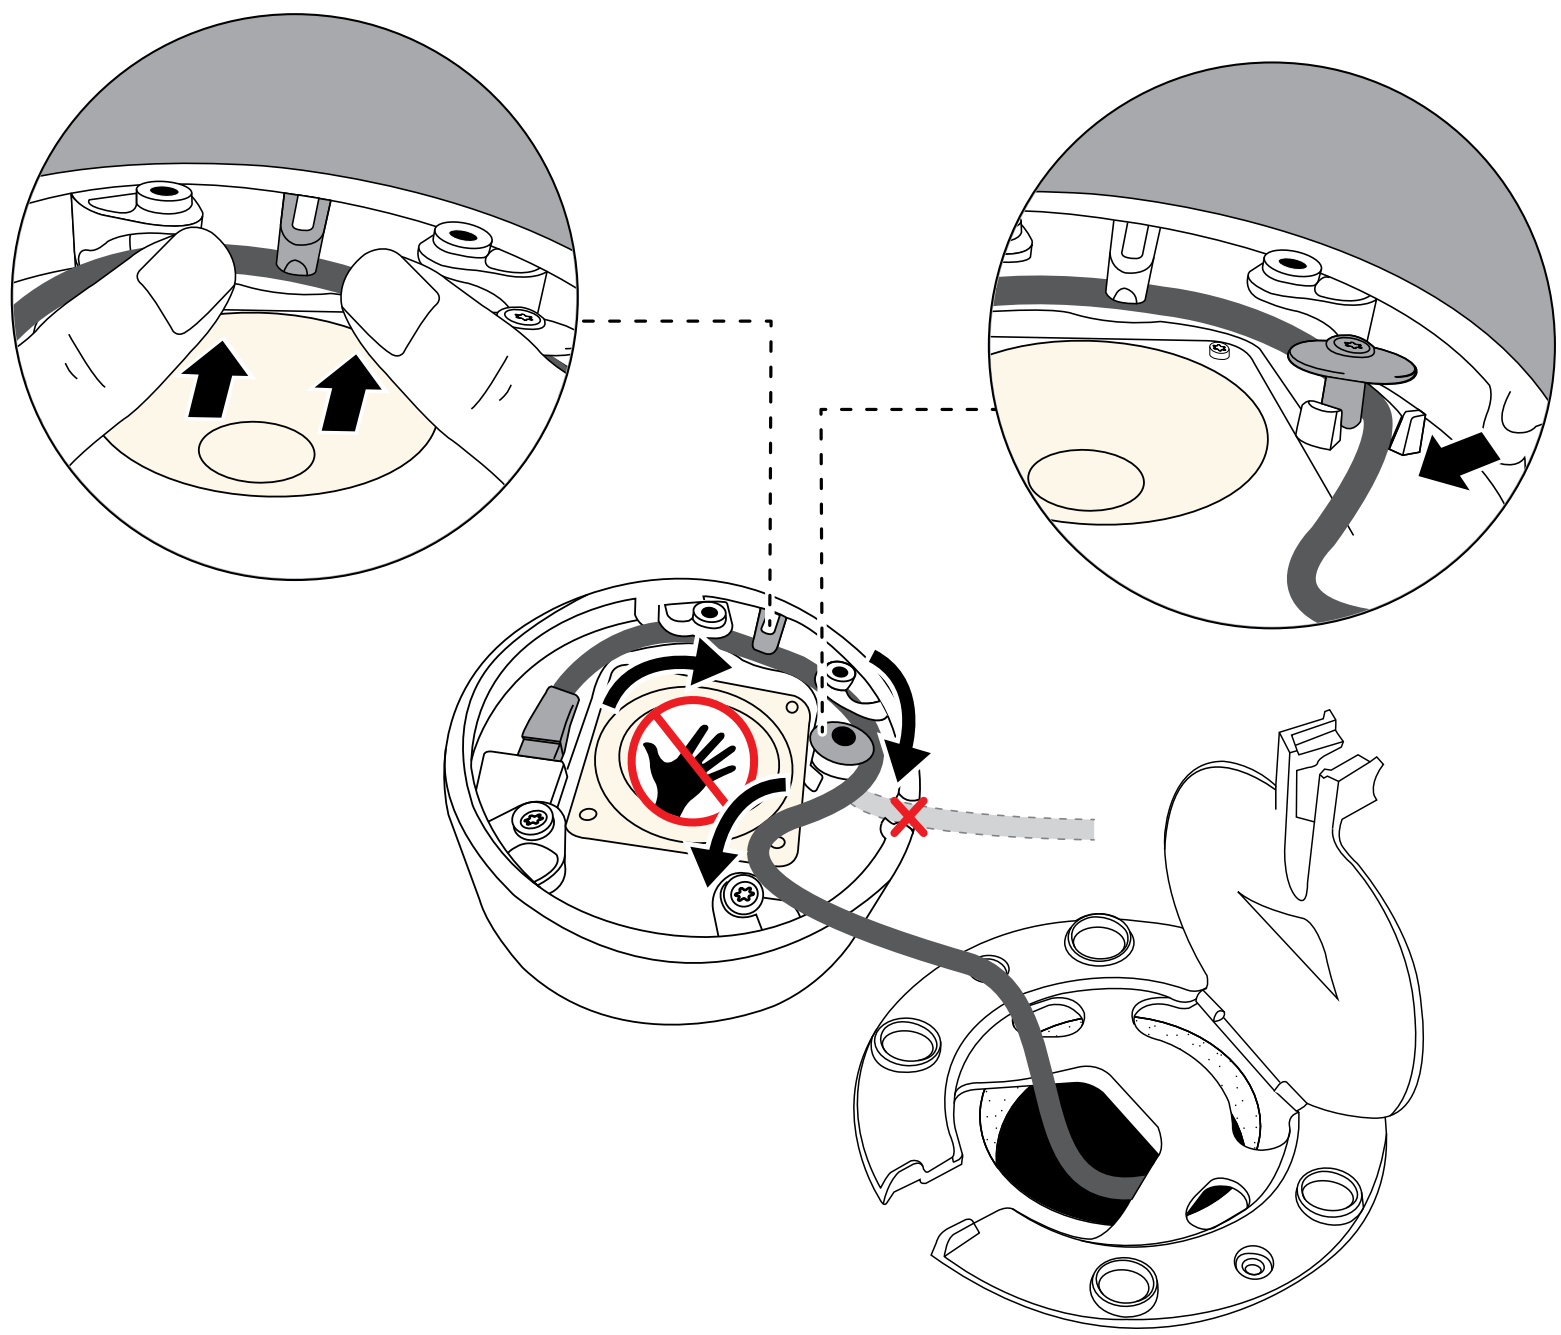


6

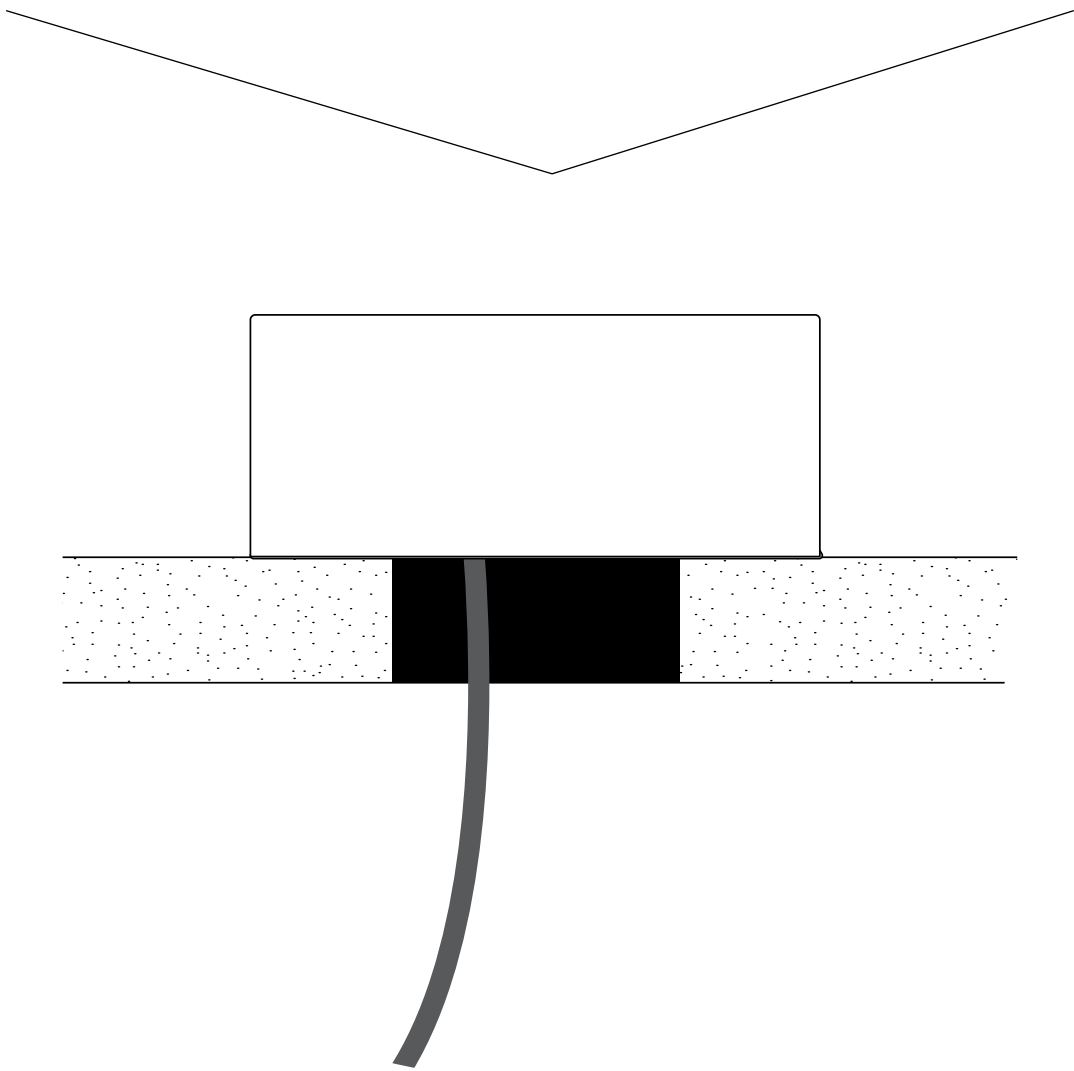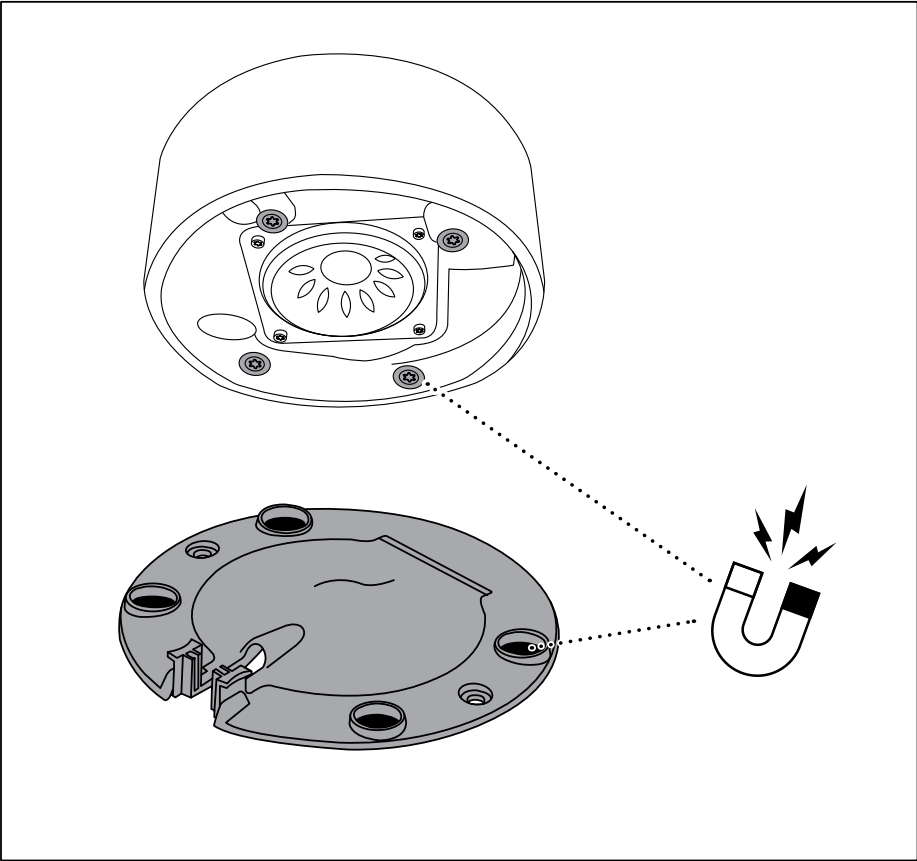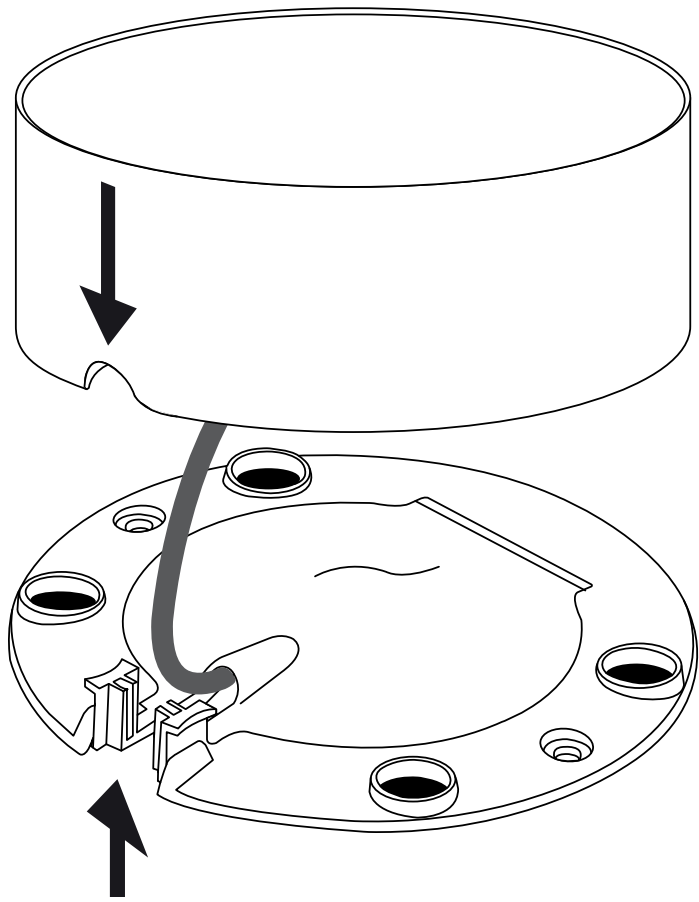


Cable on table


(Screws - not included)




1

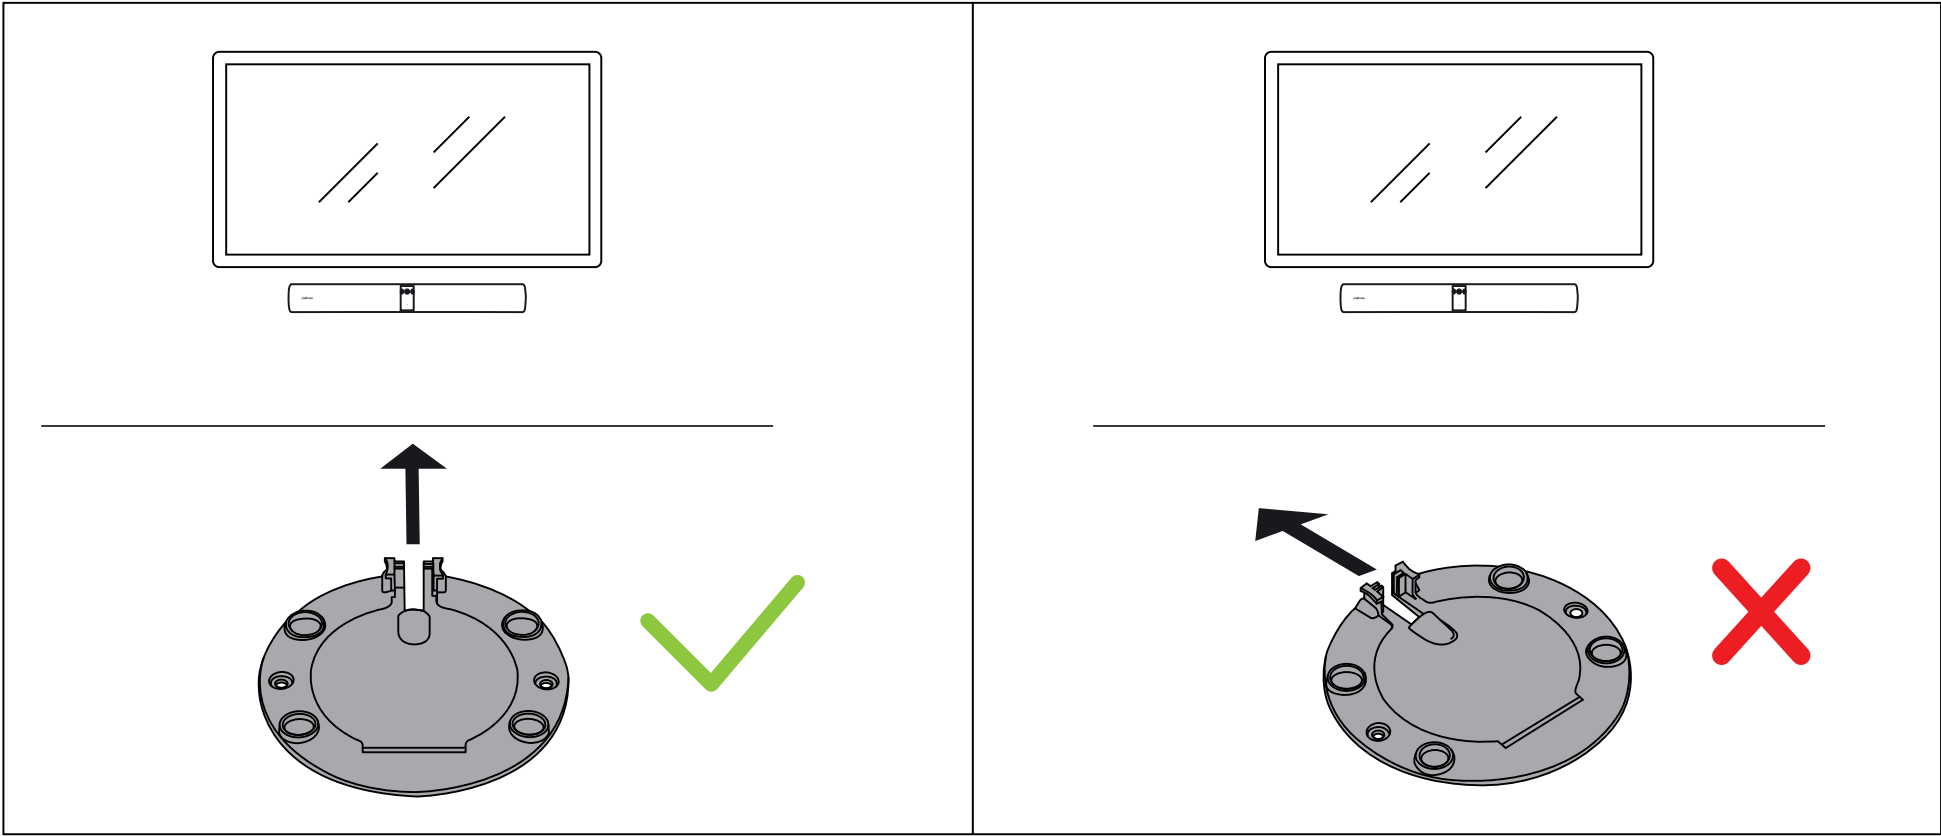


2

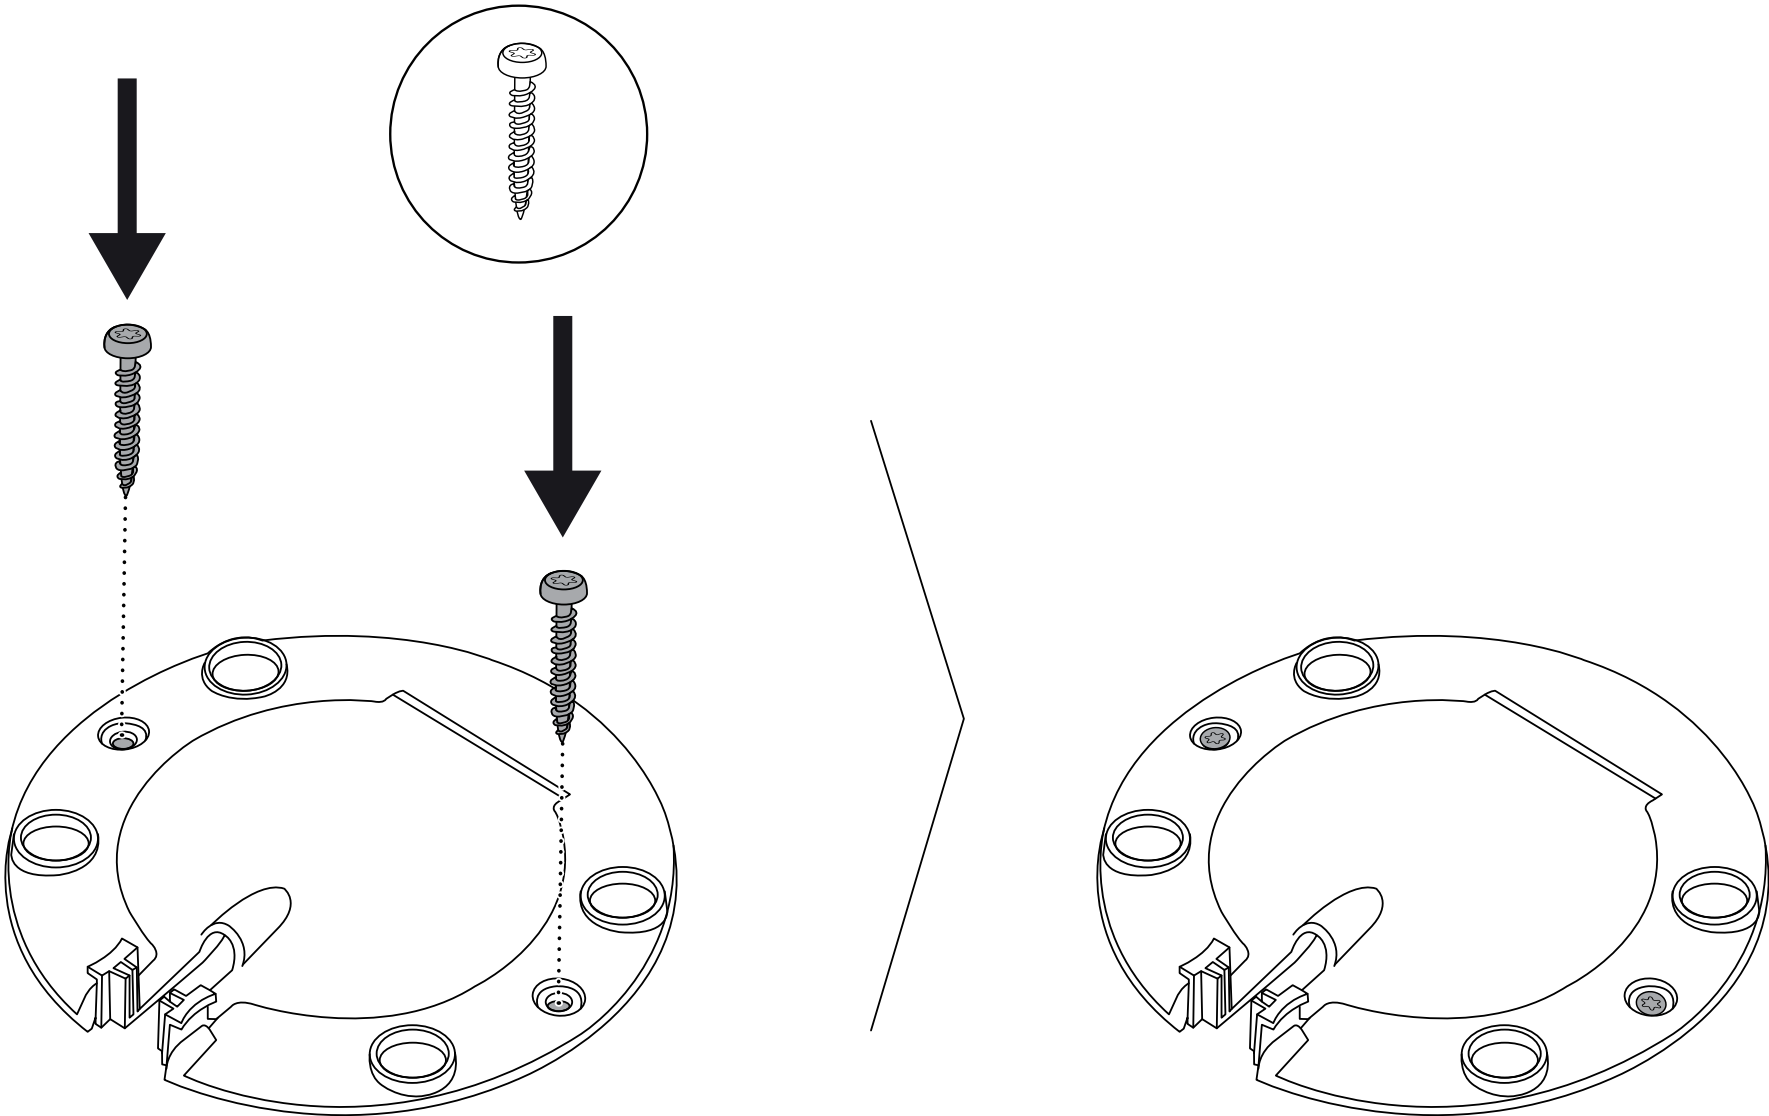





3

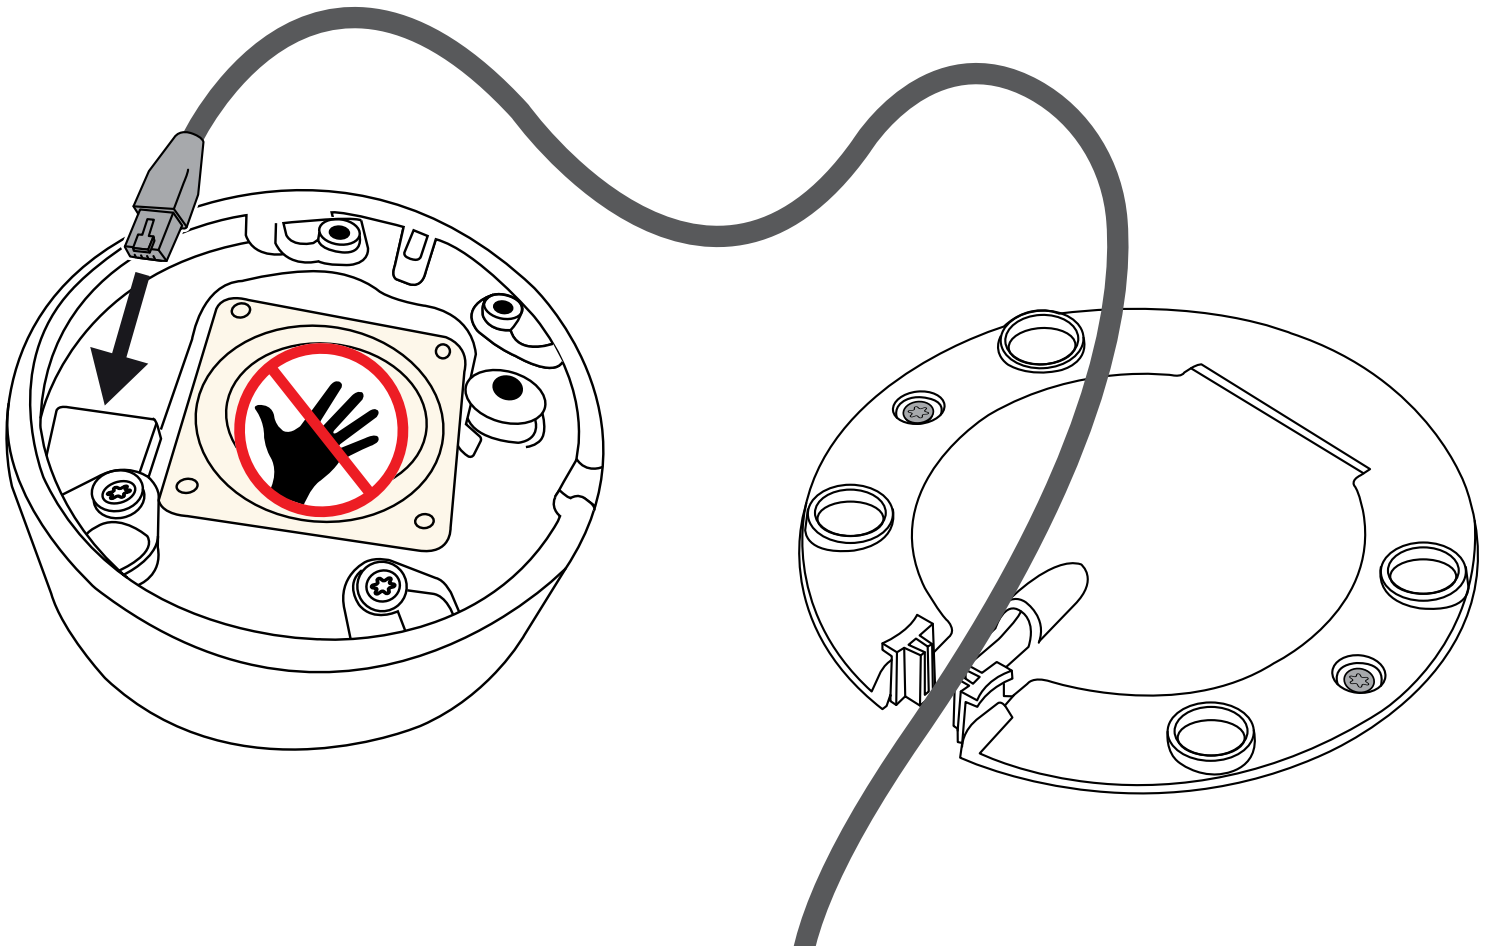

4

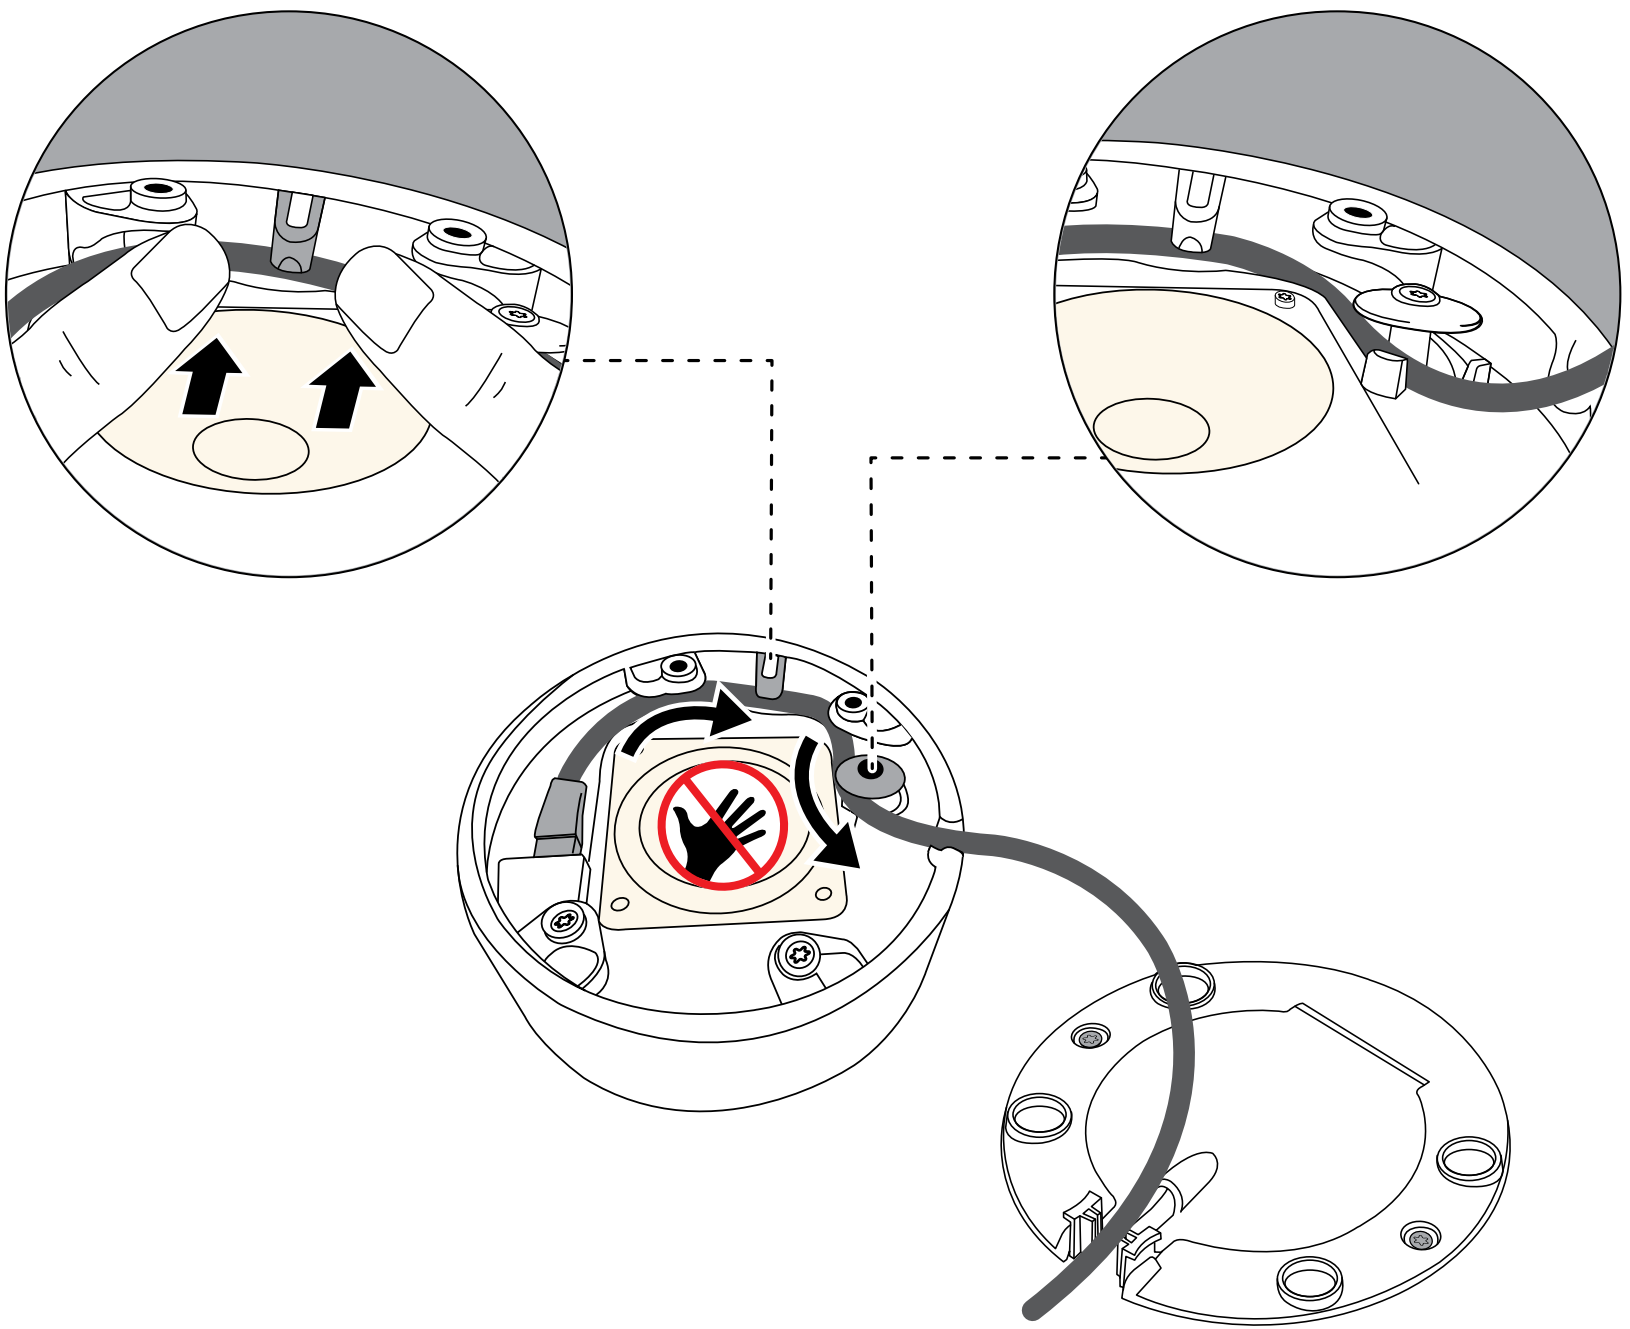


5

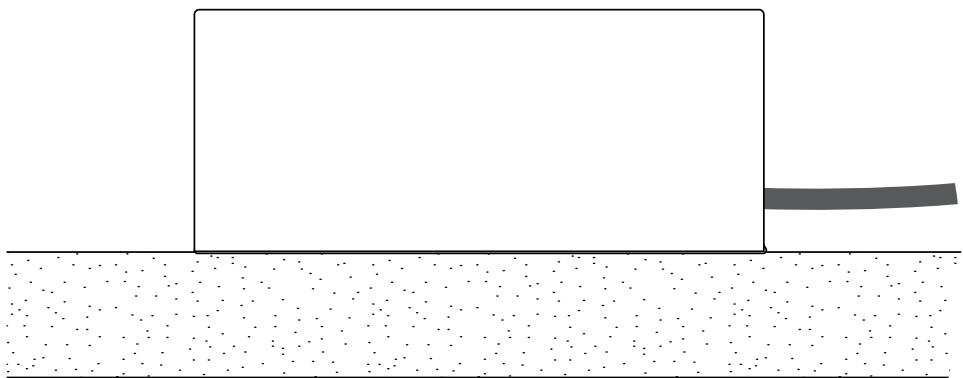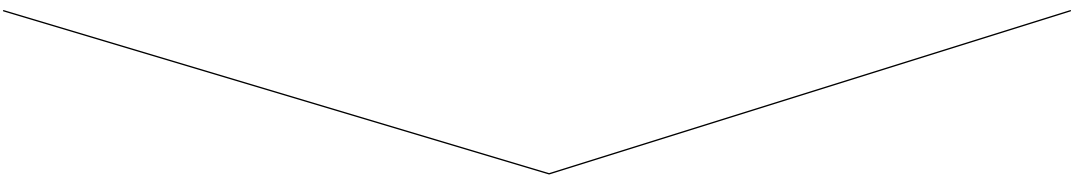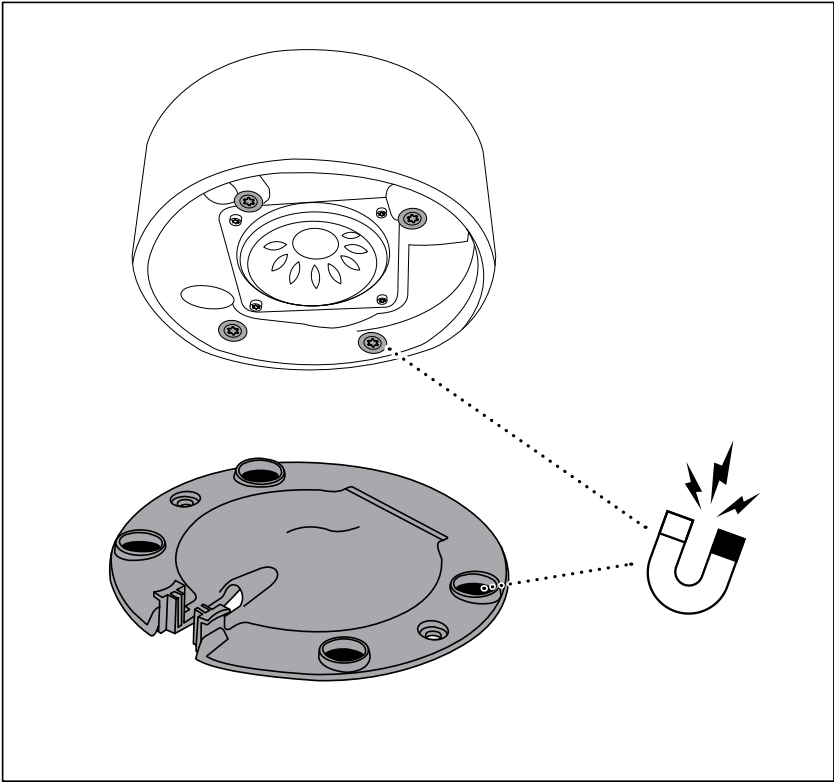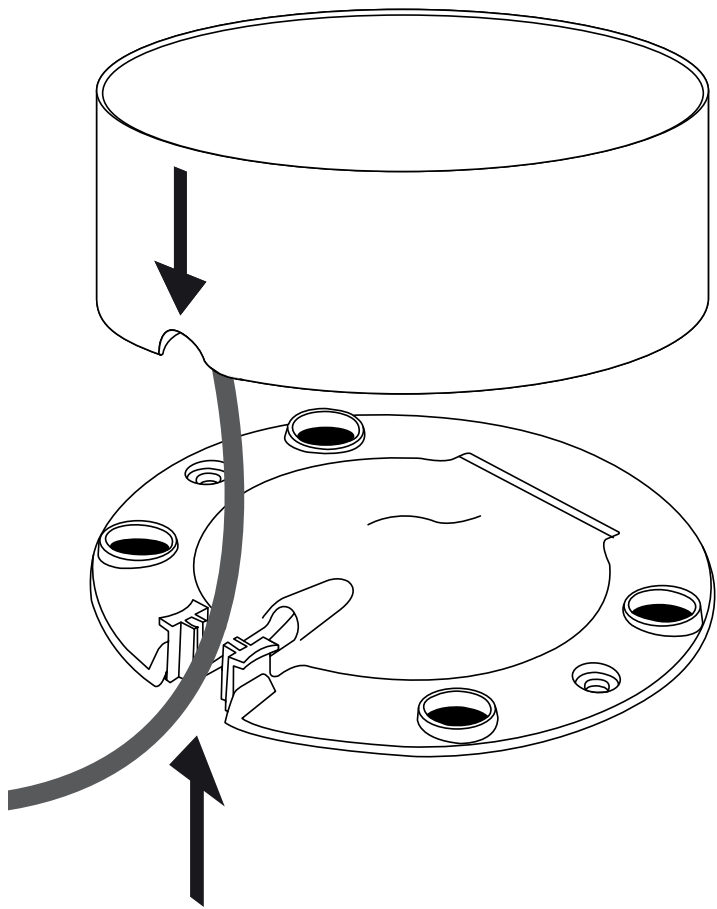


Cable on table


(Mounting adhesives)




1

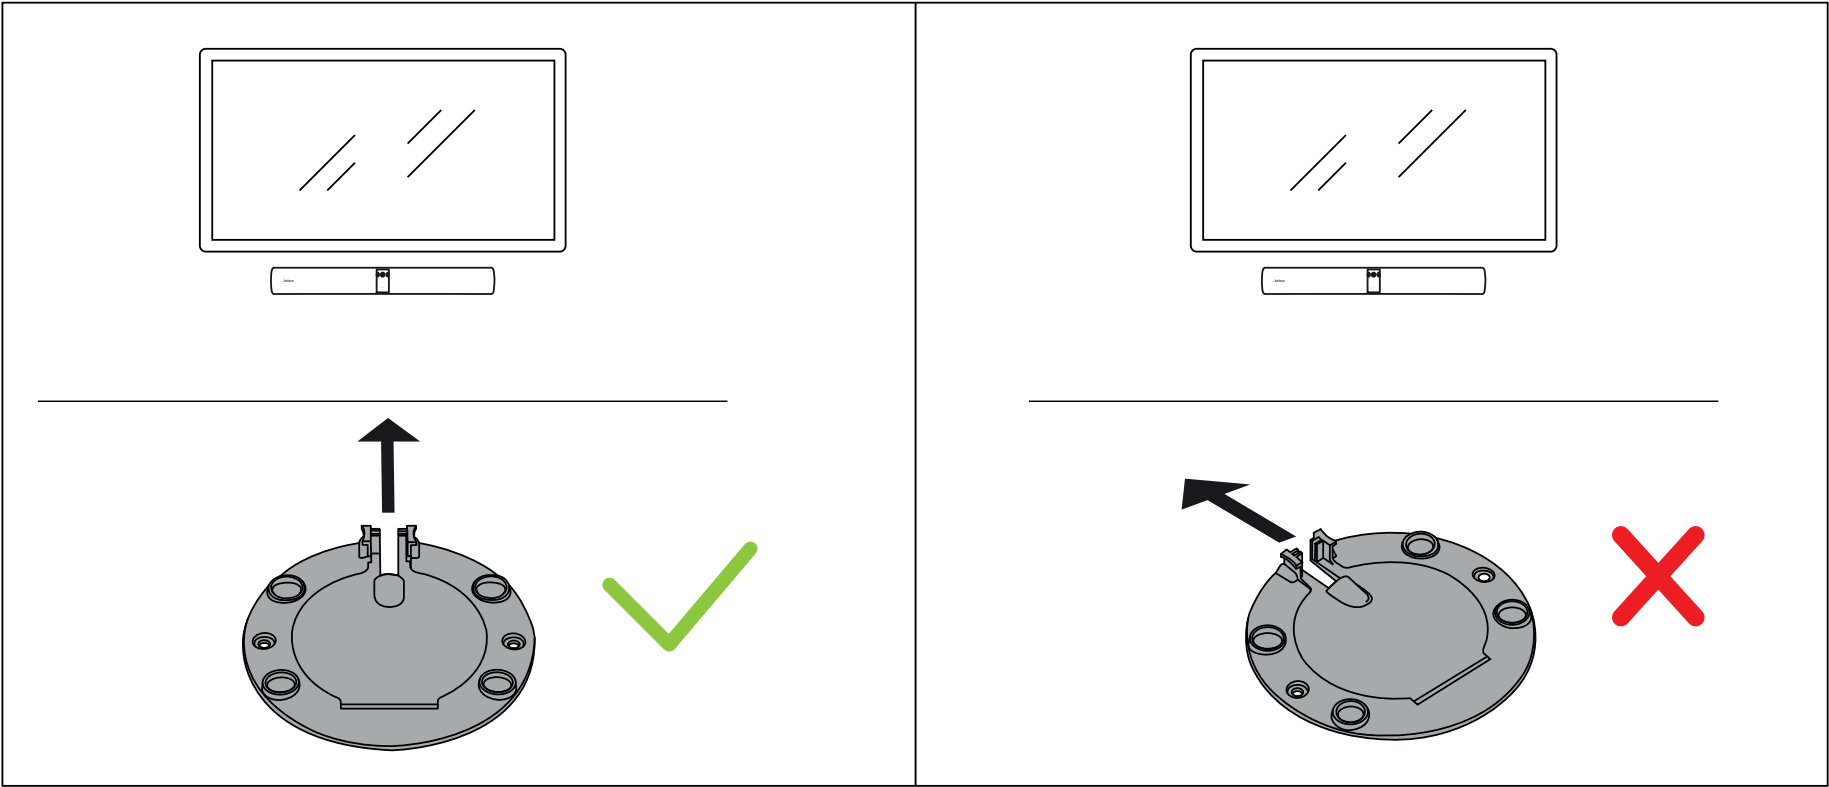


2

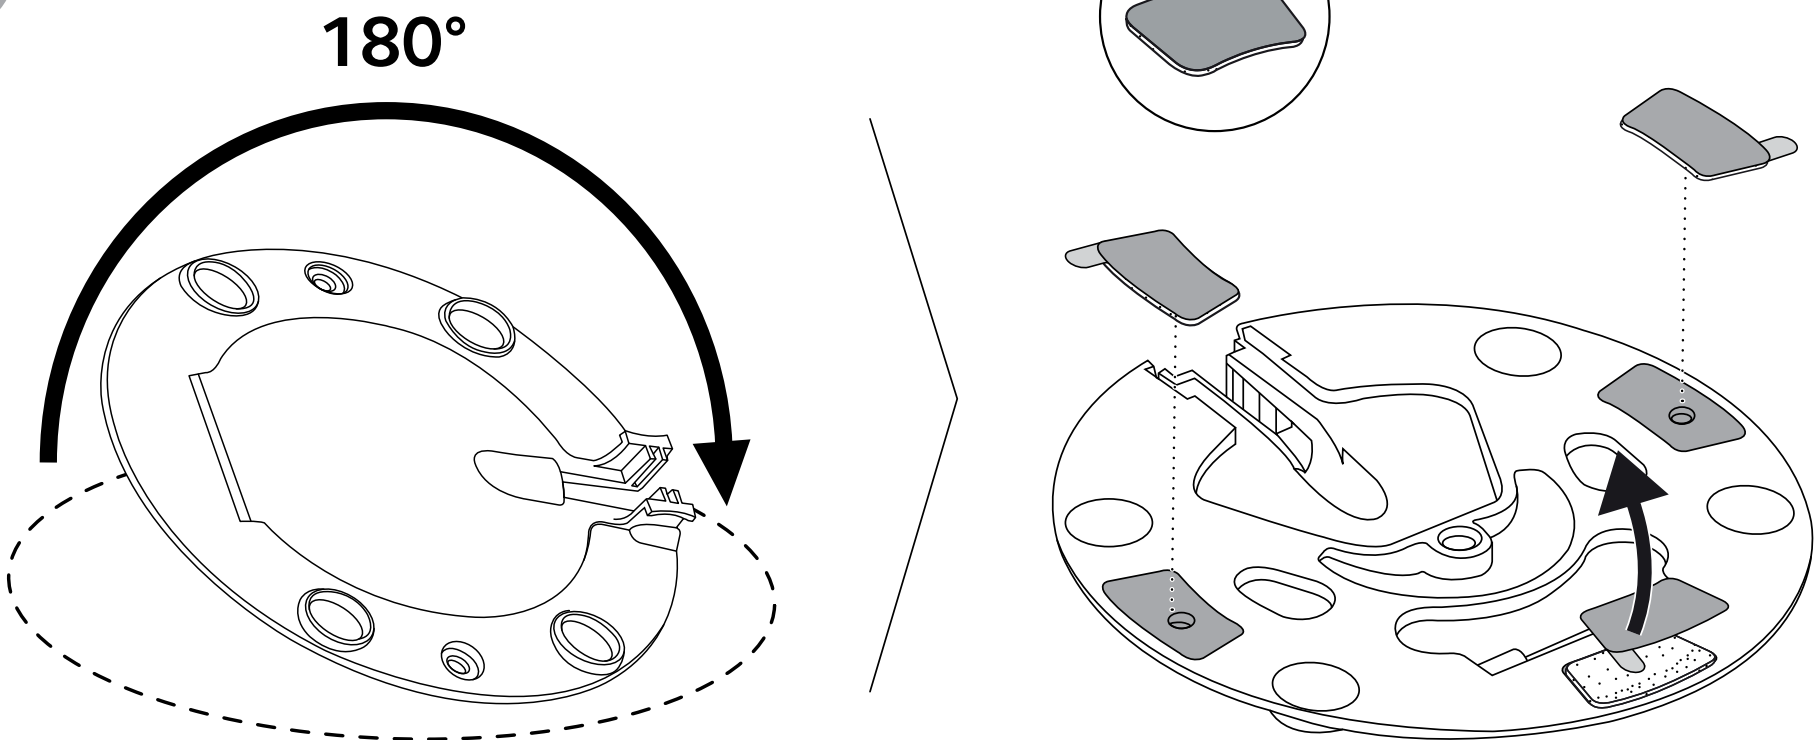


3

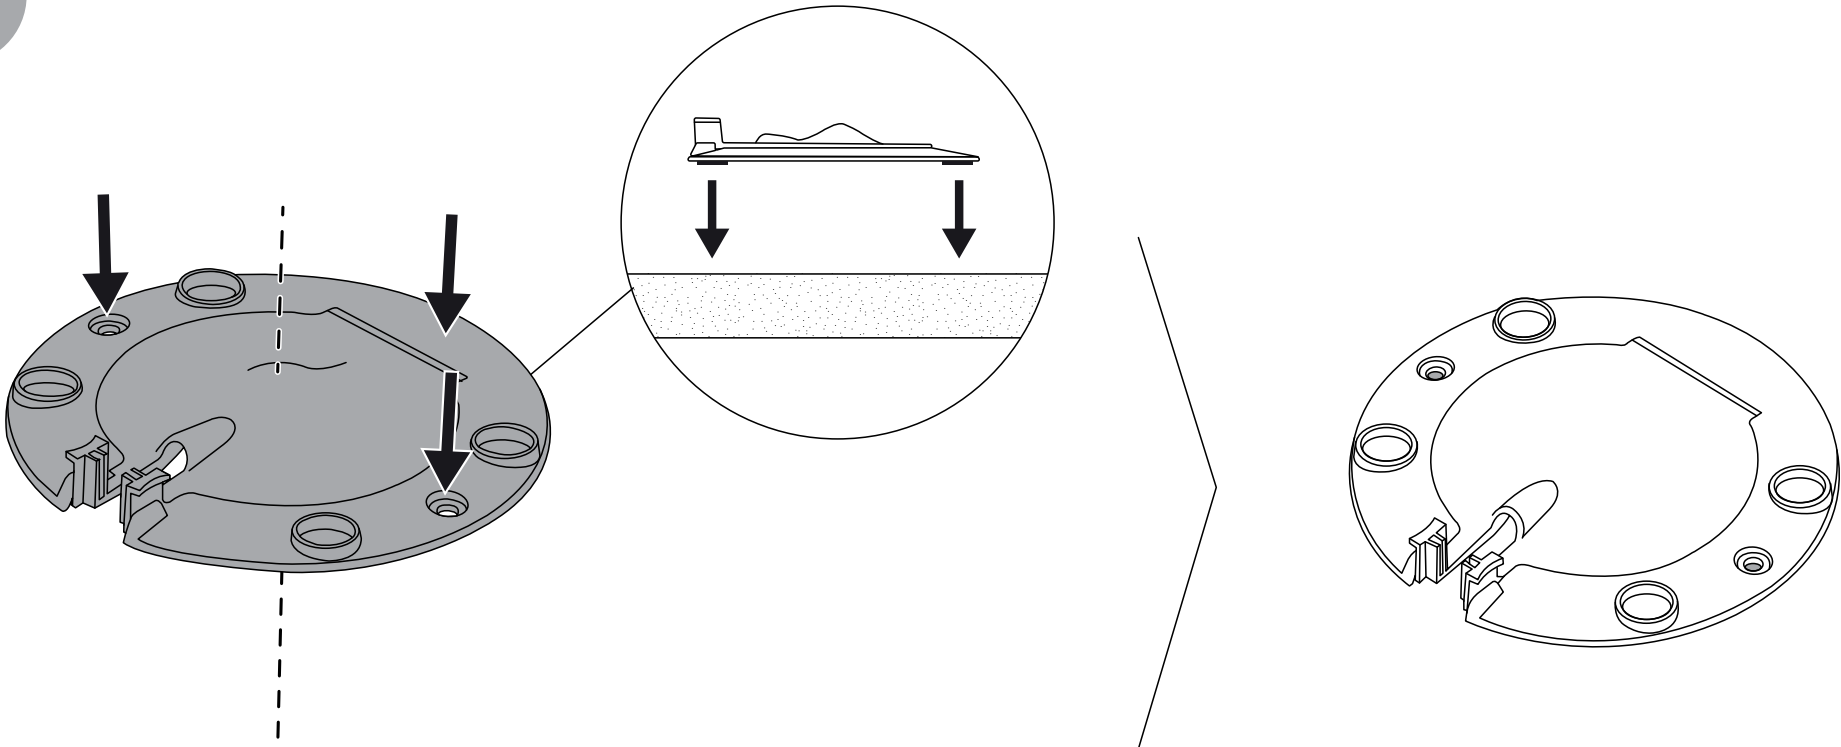





4

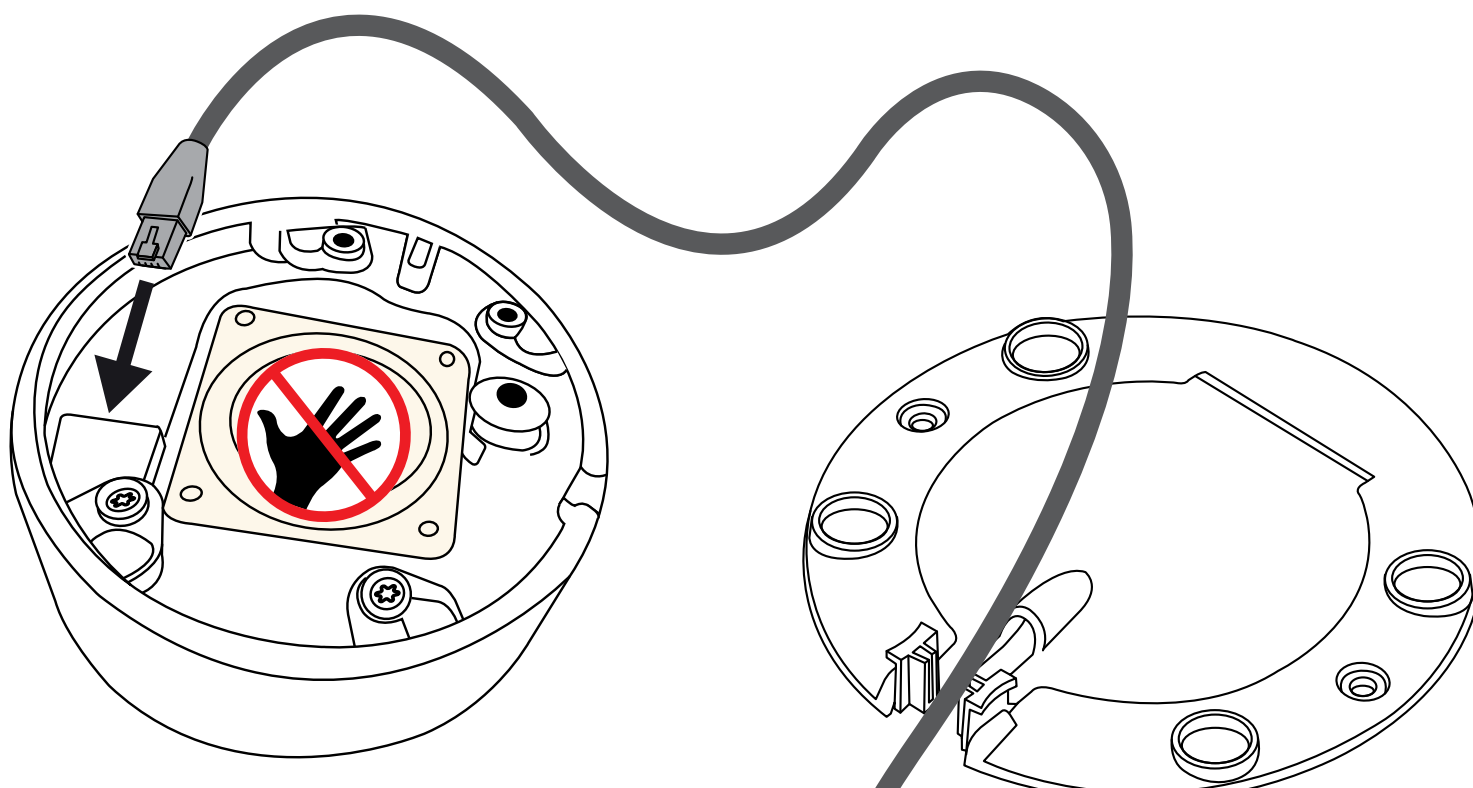


5

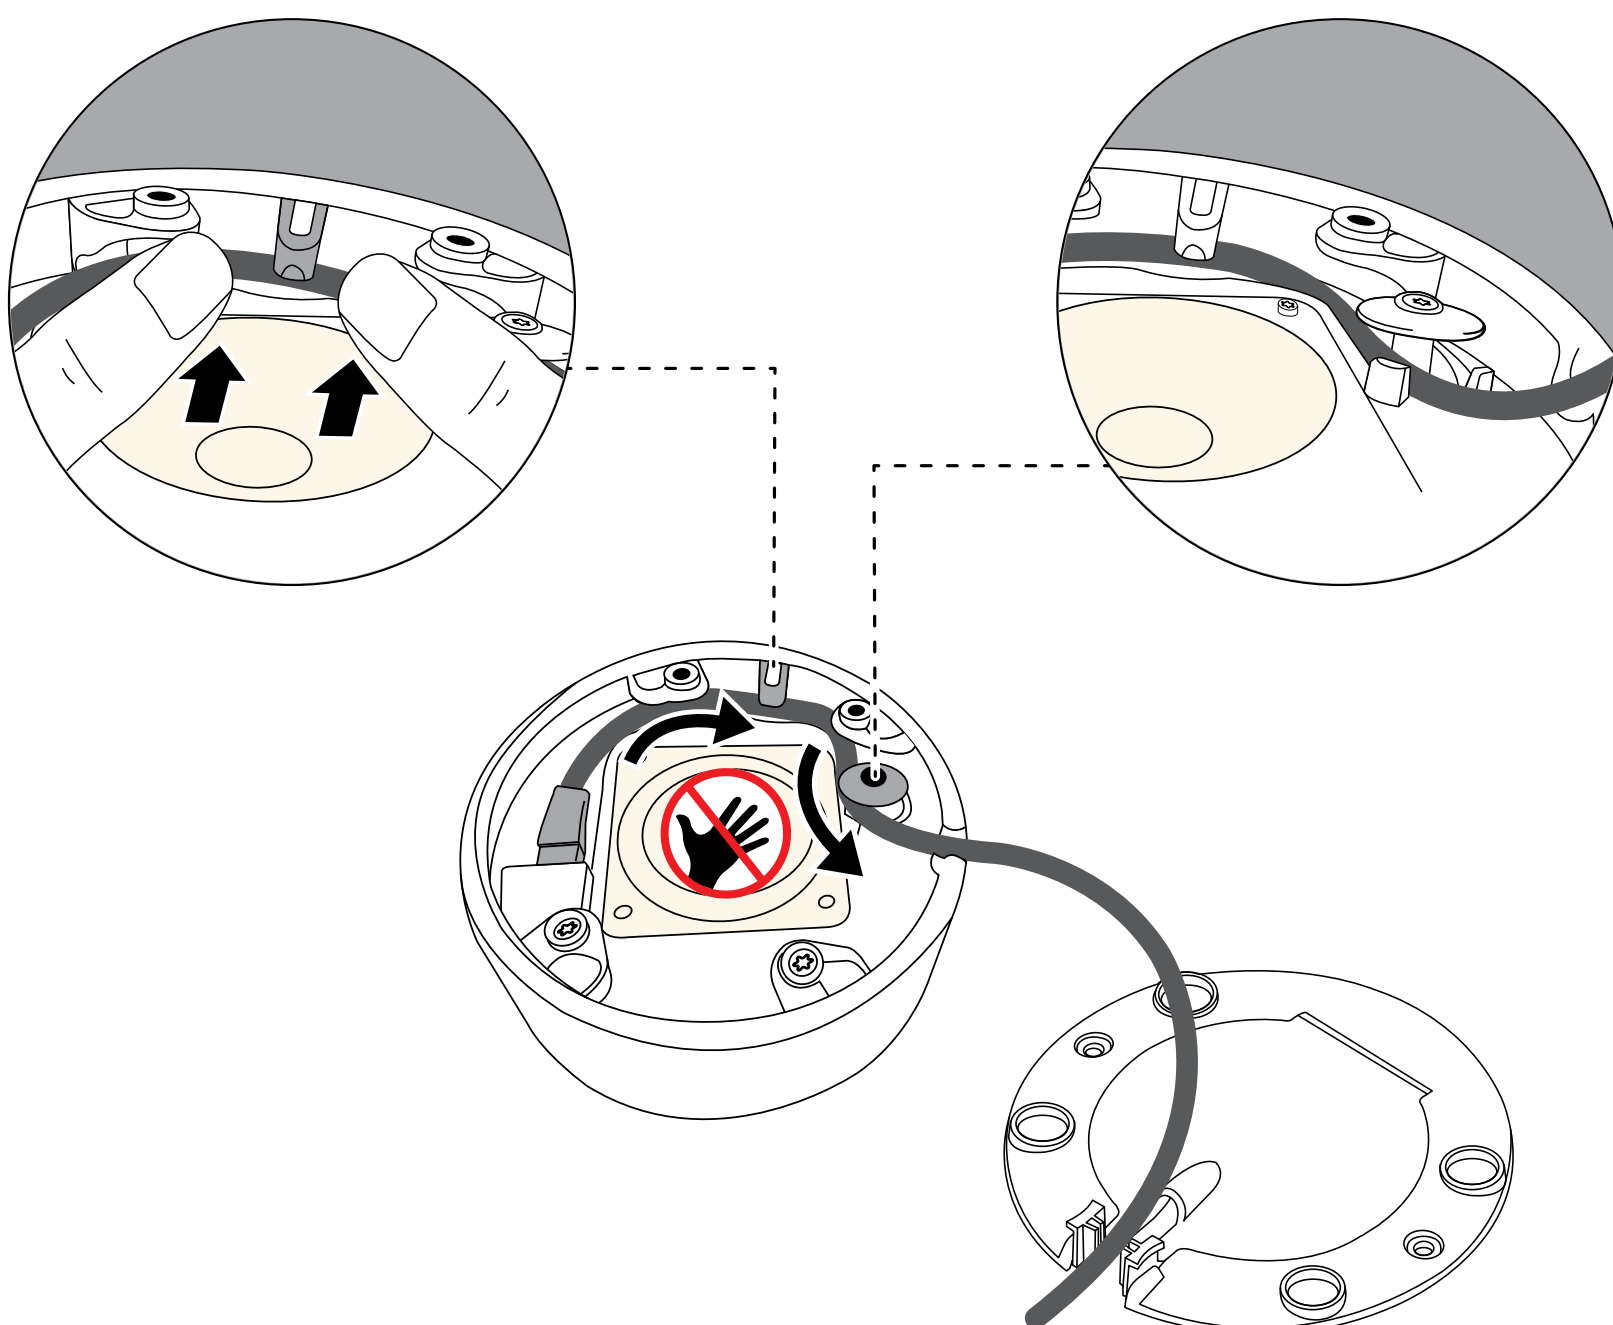


6

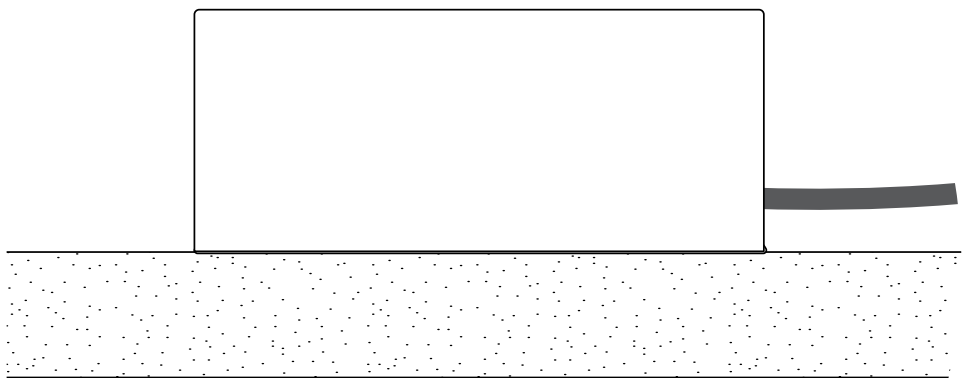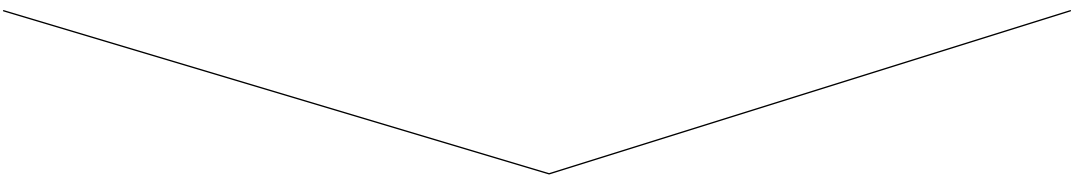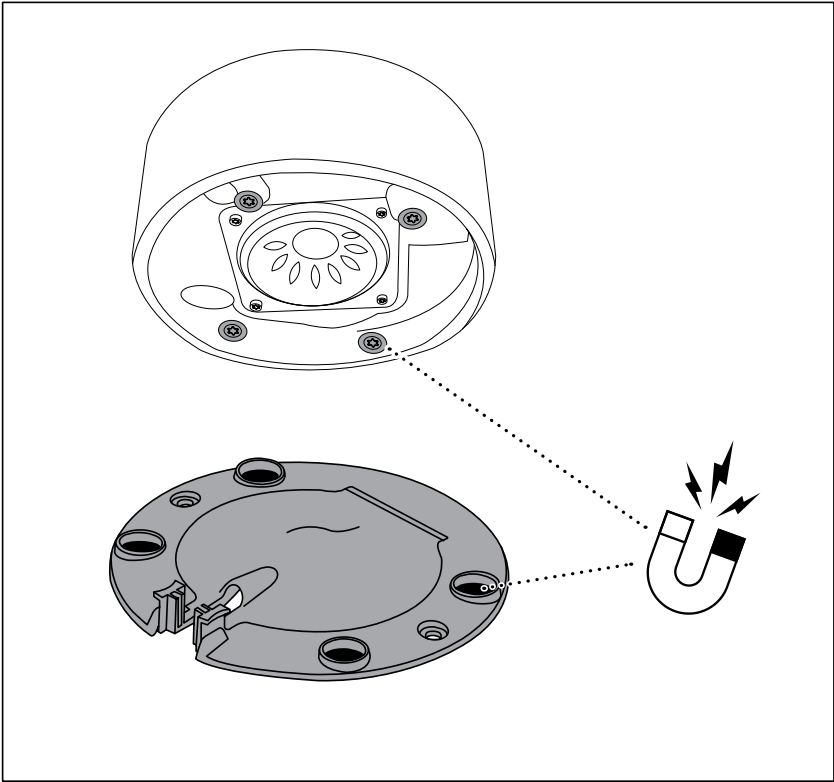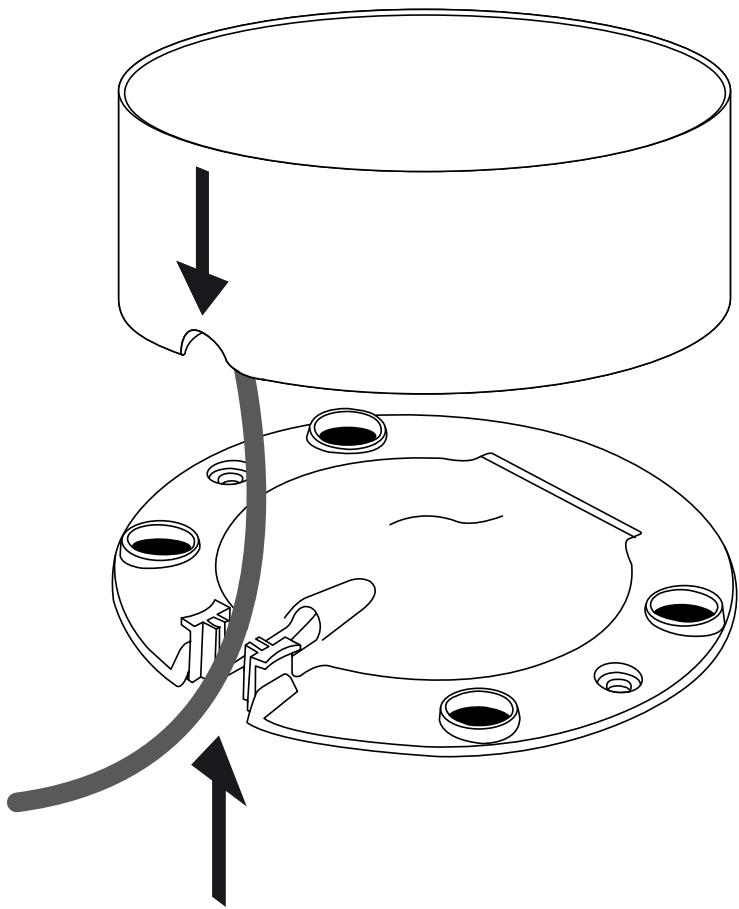


PanaCast SpeakerMic Adapter mounting




1

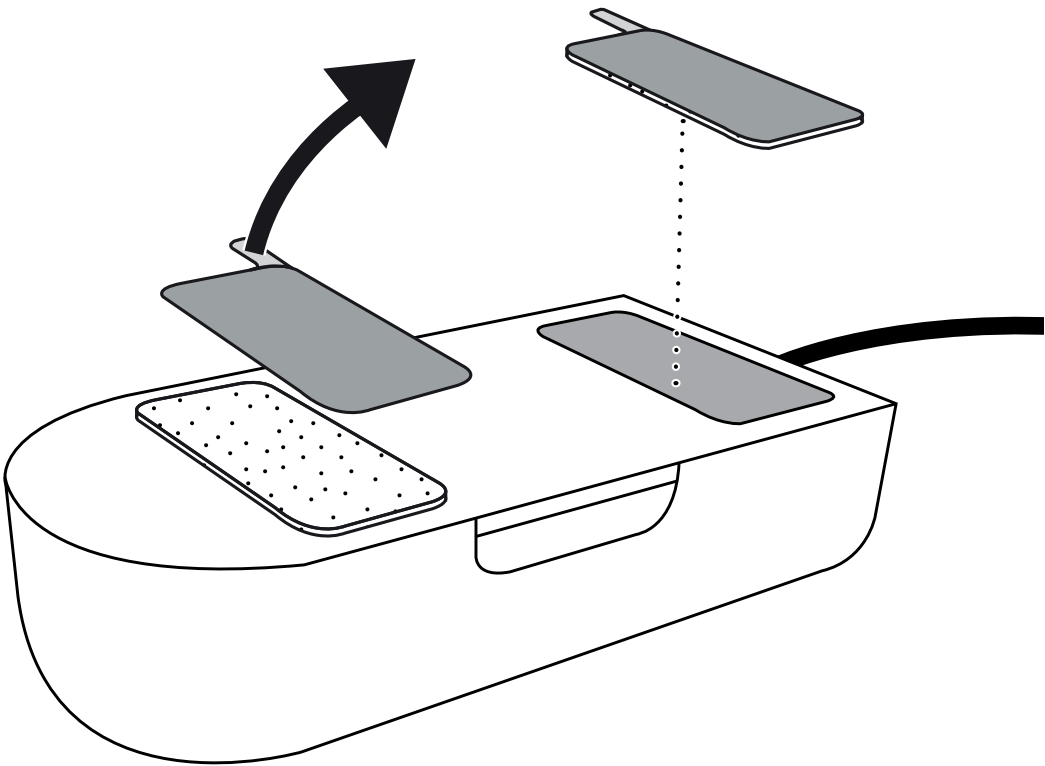


2

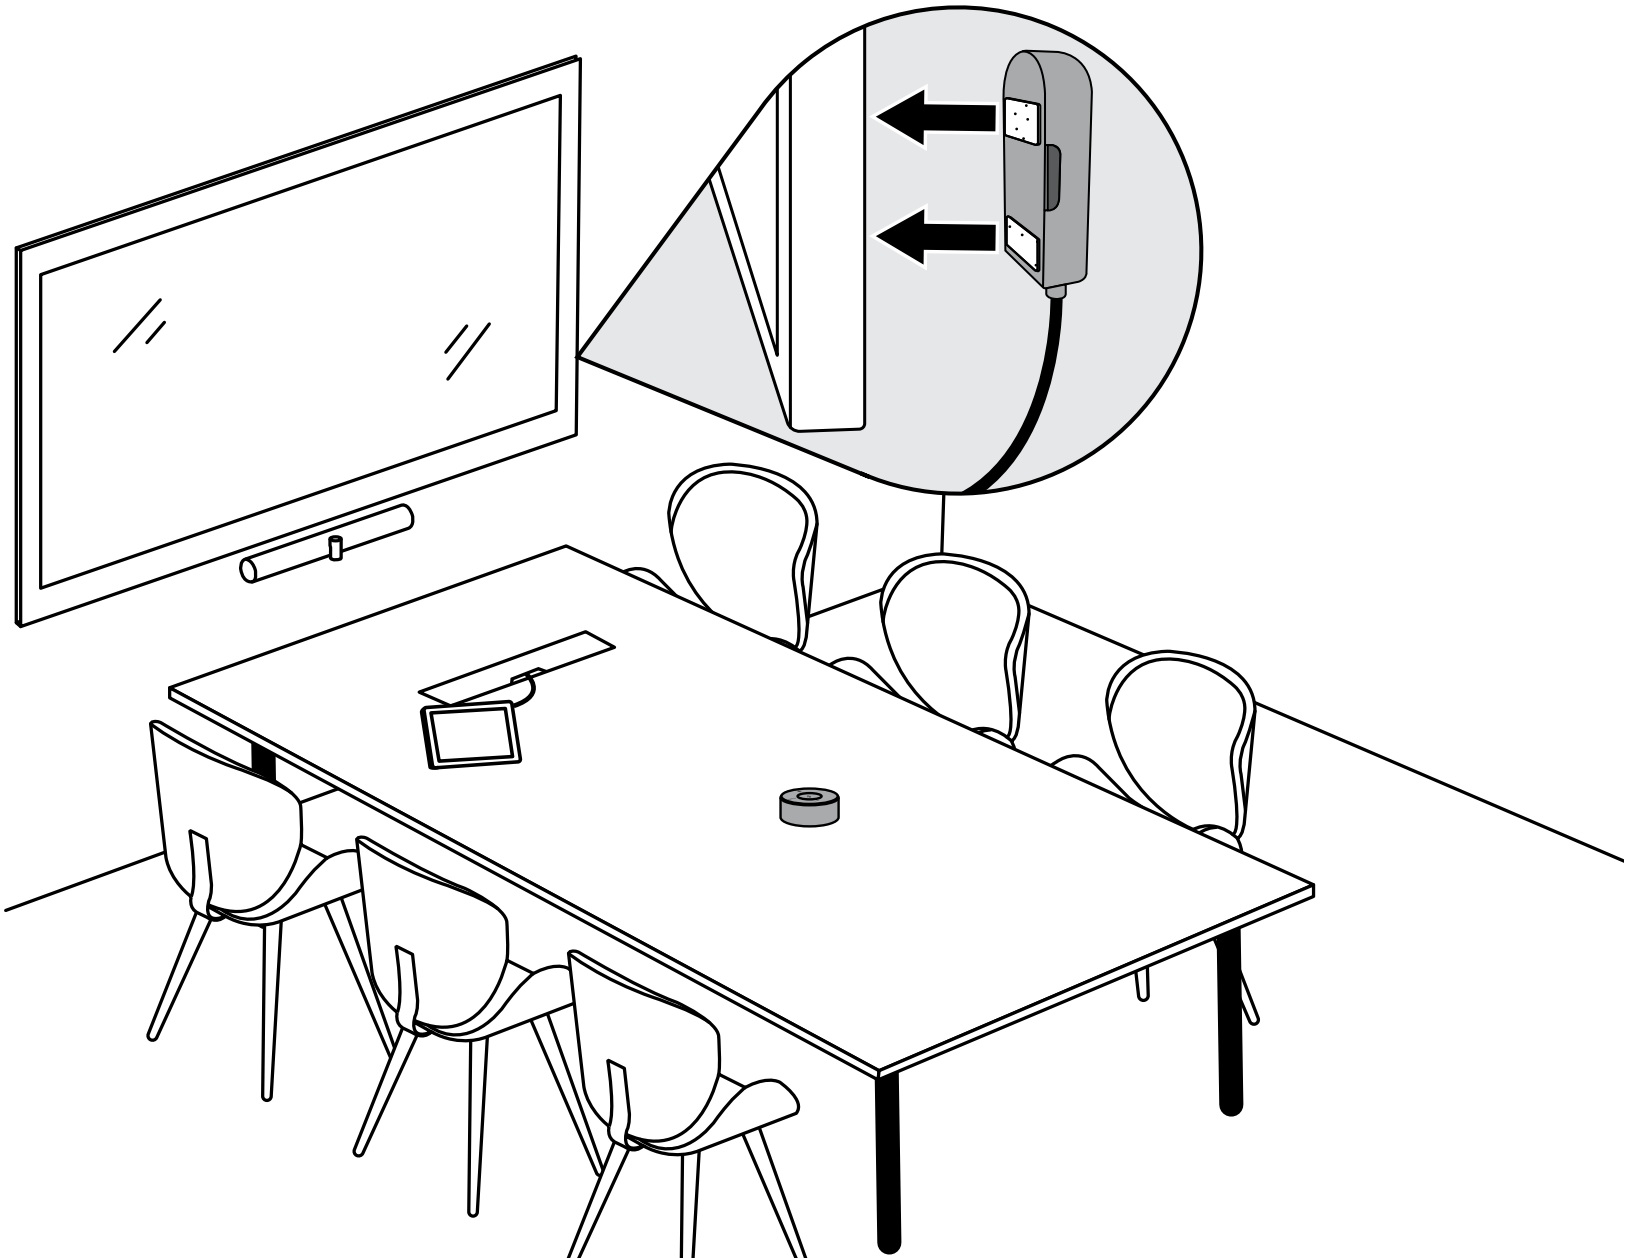

Cabling

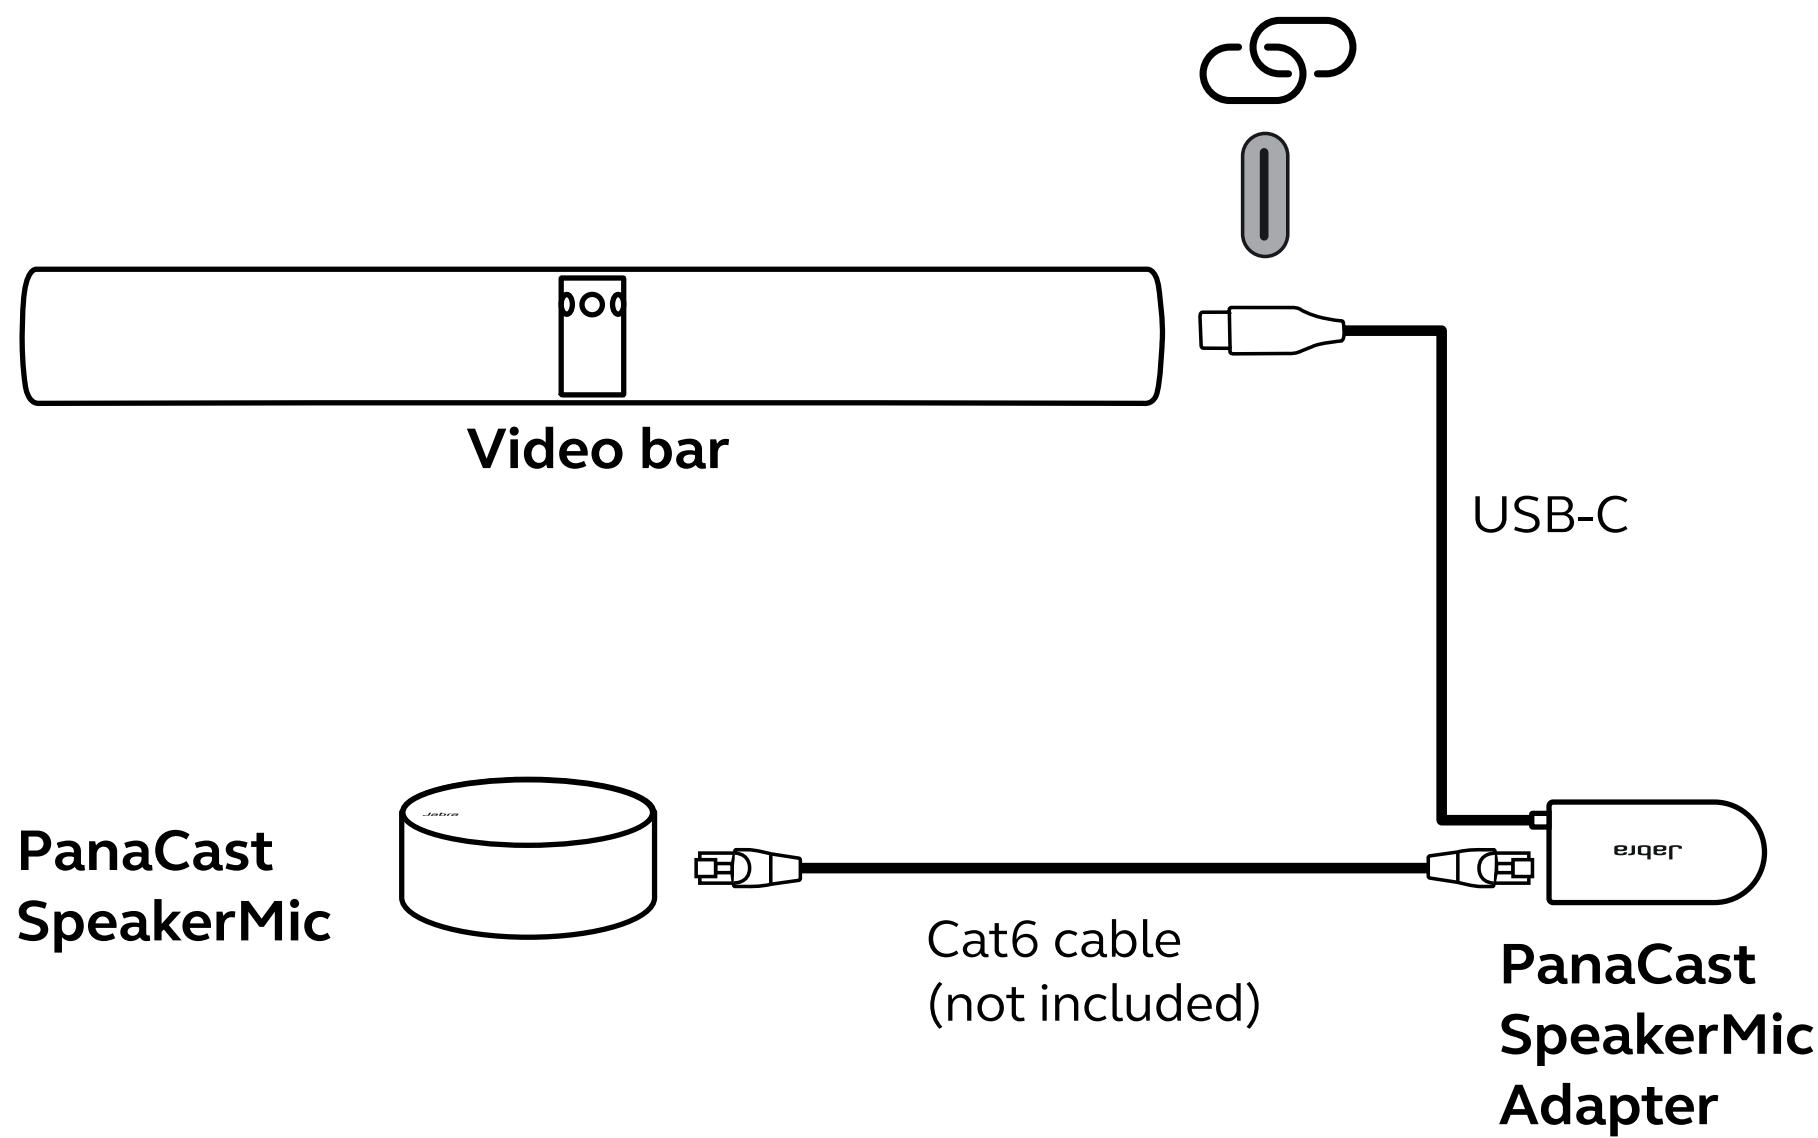

Route the Cat6 cable securely to prevent pulling, bending, or stepping on after installation.
Improper routing can result in temporary disconnections and may require a system restart.

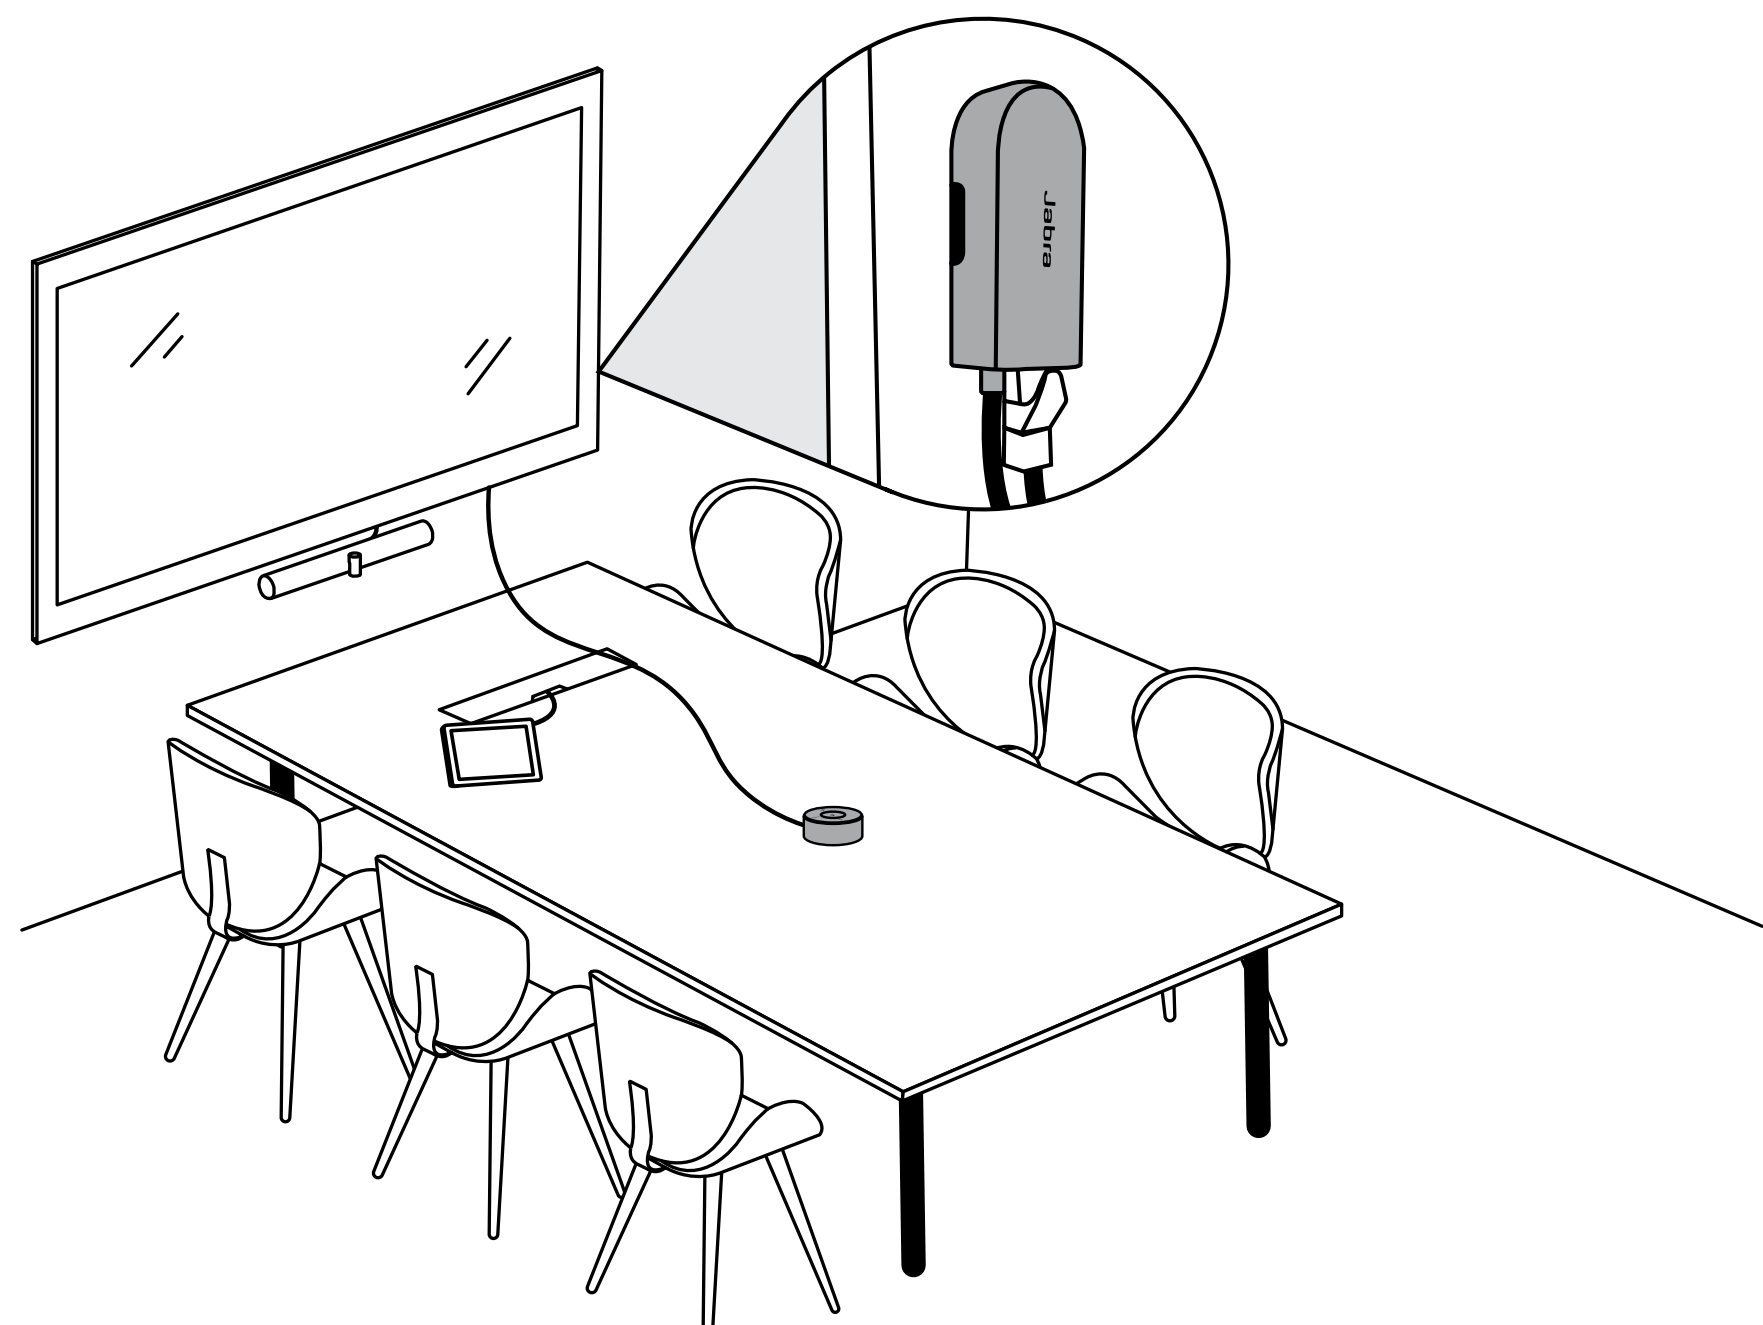

Restarting

The PanaCast SpeakerMic will automatically restart when restarting the [PanaCast 55 VBS](#).

The PanaCast SpeakerMic settings will remain the same when you restart the device.

Factory reset

The PanaCast SpeakerMic will automatically reset when factory resetting the [PanaCast 55 VBS](#).

Factory reset will restore the PanaCast SpeakerMic to its factory default settings.