

> MAXHUB XBar V70 Kit

A Teams-certified MDEP Android videobar with a 200MP Quad Sight lens camera system and integrated FlexMount - ideal for medium to large rooms.

Certified for
Microsoft Teams

Built on
Microsoft Device Ecosystem Platform



HFOV
125°



200MP
Quad Sight
Lens



Automatic
Privacy
Shutter



16 MEMS
Microphone
Array



Dual
20Watt
Speaker



10M (33ft)
Pickup
Range



FlexMount
Installation



Built on MDEP

Built on
Microsoft Device Ecosystem Platform




2-IN-1 Mounting Solution

Wall Mount

Desk Mount

Every Detail Every Angle

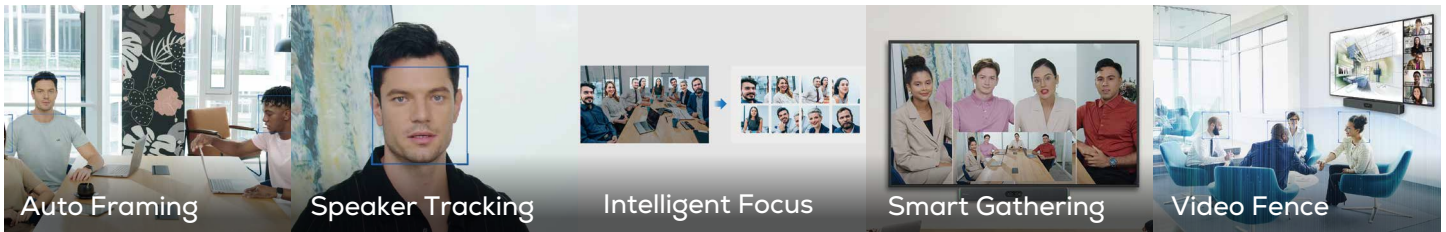


Every Word Made Clear



Sustainable by Design



Fast, Flawless Installation

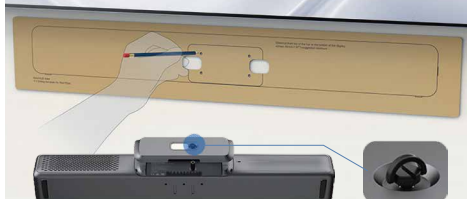

Peace of Mind, 3-Year Guaranteed



XBar V70

Camera		Speaker	
Camera Quantity	4	Speaker Quantity	2
Pixel	50MP × 4	Sound Channel	2.0
Sensor	1/1.55 inch	Total Power (Max.)	20W + 20W
Aperture	F/2.4	Sensitivity	100dB SPL @20W, +/-3dB at 1/2 meter
Resolution & Frame Rate		Sound Pressure (Max.)	89dB SPL@20W, +/-3dB at 1/2 meter
H.264 / MJPEG	3840 × 2160, 2560 × 1440, 1920 × 1080, 1280 × 720, 1024 × 576, 960 × 540, 800 × 600, 640 × 360	Frequency Range	80 Hz ~ 20 KHz
YUY2	1920 × 1080, 1280 × 720, 640 × 360	Microphone	
ZOOM	8x hybrid Zoom	Microphone Quantity	16-mic array
Wide Camera	130° (D), 125° (H), 50° (V)	Pickup Range	10 m
Telephoto Camera	52° (D), 42° (H), 32° (V)	Frequency Range	20 Hz ~ 16 KHz
Privacy Shutter	Electrical and automatical lens shutter	Sensitivity	-36 ± 1 dBFS
AI Feature	Auto Framing Speaker Tracking Intelligent Focus Smart Gathering Video Fence	Sampling	48 KHz
		Expansion	Supports 2 expansion microphones
		AI Feature	Noise Reduction Echo Cancellation Anti-Reverberation AEC (Acoustic Echo Cancellation) ANS (Automatic Noise Suppression) AGC (Automatic Gain Control) Full-duplex
Operating System		Input/Output Port	
MDEP	Supported	USB-A (2.0) × 1	For firmware update and debug
OS	Andriod 13	HDMI In × 1	Up to 4K@60Hz
Network		HDMI Out × 2	Up to 4K@60Hz, CEC supported
Wi-Fi	Wi-Fi 6, 2×2 MIMO	USB-B 3.0 (Device) × 1	For BYOD Mode
Wi-Fi Protocol	802.11 a/ b/ g/ n/ ac/ ax	DC In × 1	For 19V power supply
Working Band	2.4 GHz + 5 GHz	Audio In × 1	To connect third-party device for audio input
Bluetooth	5.2 + BLE	RJ45 (Internet) × 1	For network connection
Network	1000 Mbps	RJ45 (M Link) × 1	To connect to the panel
Power		RJ45 (Ext) × 1	To connect MAXHUB exclusive accessories (microphone, camera, etc.)
Power Adapter	AC 100-240 V Input and DC 19V/4.5A Output	USB-A (3.0) × 1	For firmware update and debug
		Audio Out × 1	To connect third-party device for audio output
Physical Specification			
Product Dimension (L×W×H)	840.6 × 117.6 × 104 mm / 33.1 × 4.6 × 4.1 in		
Package Dimension (L×W×H)	962 × 169 × 246 mm / 37.9 × 6.7 × 9.7 in		
Net Weight	4.3 kg / 9.7 lb		
Gross Weight	7.0 kg / 15.4 lb		
Standard Accessories			
Power Adapter	× 1		
AC Cable (1.5 m / 4.9 ft)	× 1		
HDMI Cable (3 m / 9.8 ft)	× 2		
Ethernet Cable (3 m / 9.8 ft)	× 1		
Mounted Components	× 1		

Panel AP30

Display		Input/Output Port	
Size	11.6 inch	RJ45 (Internet)	× 1
Resolution	1920 × 1080	RJ45 (Ext)	× 1
Frequency Refresh Rate	60 Hz	DC In (Power)	× 1
Backlight Unit	ELED	Type-C (Ingest)	× 1
Brightness With Glass	250 nits (Min.) 300 nits (Max.)	USB 2.0 (Pairing Wireless Dongle)	× 1
Life Time	≥ 20000 hours	Power	
Touch System		Power Input	19V DC 4.5A
Type	Capacitive touch	Power Output	Type-C PD 65W (Max.)
Surface Treatment	Anti-fingerprint, Anti-glare	Physical Specification	
		Product Dimension (L×W×H)	278 × 164 × 82.4 mm / 11 × 6.4 × 3.2 inch
		Product Weight	1.16 kg / 2.56 lb
		Package Dimension (L×W×H)	1 pcs: 570 × 246 × 101 mm 4 pcs: 590 × 440 × 280 mm 1 pcs: 3.12 kg
Accessories		Package Weight	1 pcs: 3.12 kg
Type-C Cable (1.5 m / 4.92 ft)	× 1	Sensor	
Ethernet Cable (7.5 m / 24.61 ft)	× 1	Motion Sensor	PIR sensor for automatic wake-up
Screwdriver	× 1	Operating System	
Power Adapter	× 1	MDEP	Supported
AC Cable (1.5 m / 4.9 ft)	× 1	OS	Andriod 13

Statement: Product specifications and appearance may vary and are subject to change without notice.