


MAXHUB Mic Pod






DM30 delopymnt guide **For XBar V50 / XBar V70**


V1.0

MAXHUB

Connection


Direct connection to XBar via Daisy Chain.

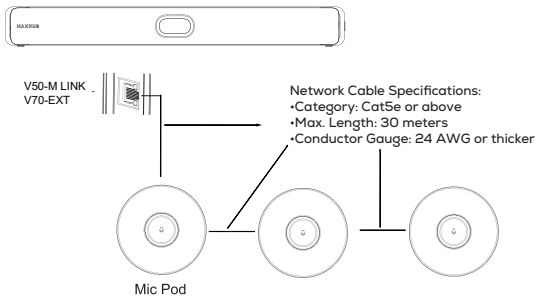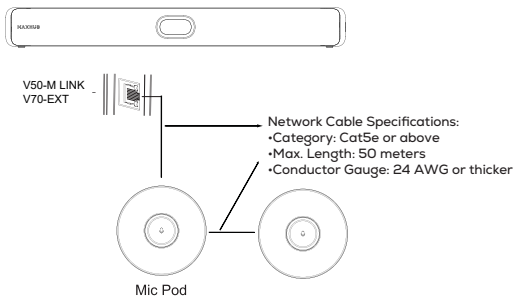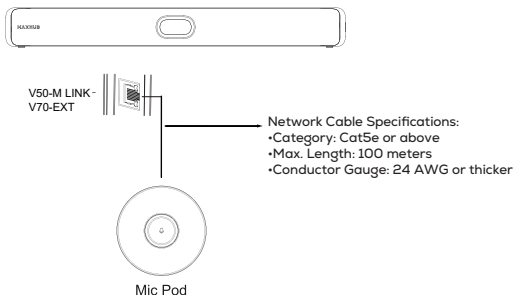

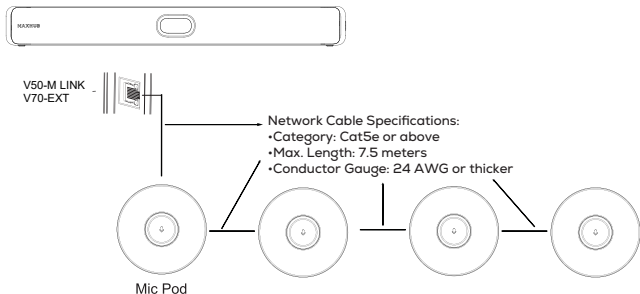

Connection

Connection to XBar via PoE switch in daisy chain.

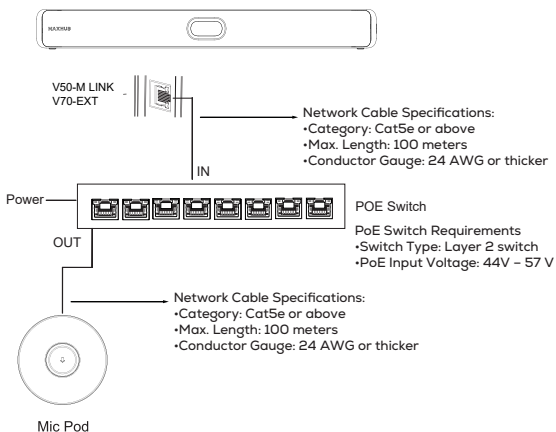



V50-M LINK
V70-EXT

IN

Network Cable Specifications:

- Category: Cat5e or above
- Max. Length: 100 meters
- Conductor Gauge: 24 AWG or thicker

Power

OUT




POE Switch

PoE Switch Requirements

- Switch Type: Layer 2 switch
- PoE Input Voltage: 52 V – 57 V

Network Cable Specifications:

- Category: Cat5e or above
- Max. Length: 50 meters
- Conductor Gauge: 24 AWG or thicker



Mic Pod



V50-M LINK
V70-EXT

IN

Network Cable Specifications:

- Category: Cat5e or above
- Max. Length: 100 meters
- Conductor Gauge: 24 AWG or thicker

Power

OUT




POE Switch

PoE Switch Requirements


- Switch Type: Layer 2 switch
- PoE Input Voltage: 52 V – 57 V

Network Cable Specifications:

- Category: Cat5e or above
- Max. Length: 30 meters
- Conductor Gauge: 24 AWG or thicker

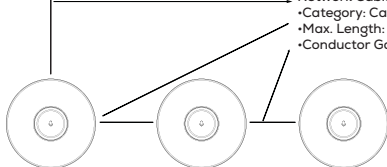




Mic Pod

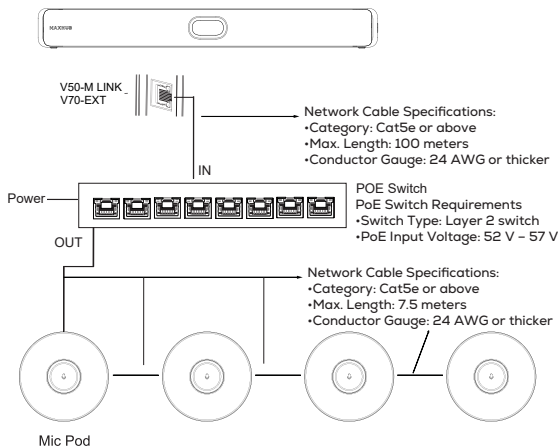

Connection

Connection to XBar via a PoE switch using star-cascade topology.

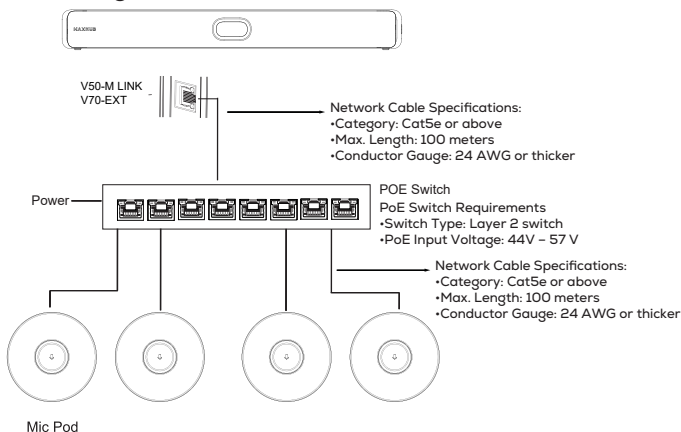

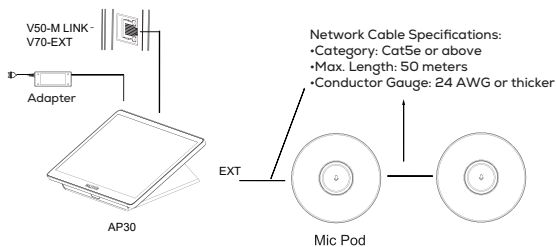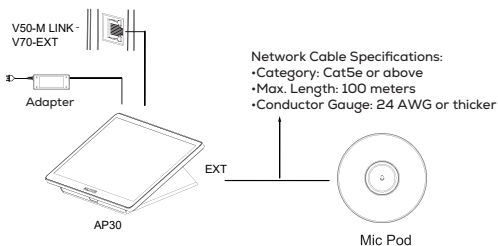

Firmware Updates

The firmware of DM30 will be updated automatically when connected to the XBar V50 or XBar V70.

MAXHUB

