



Touchscreen Core

Wall Mount Installation Guide

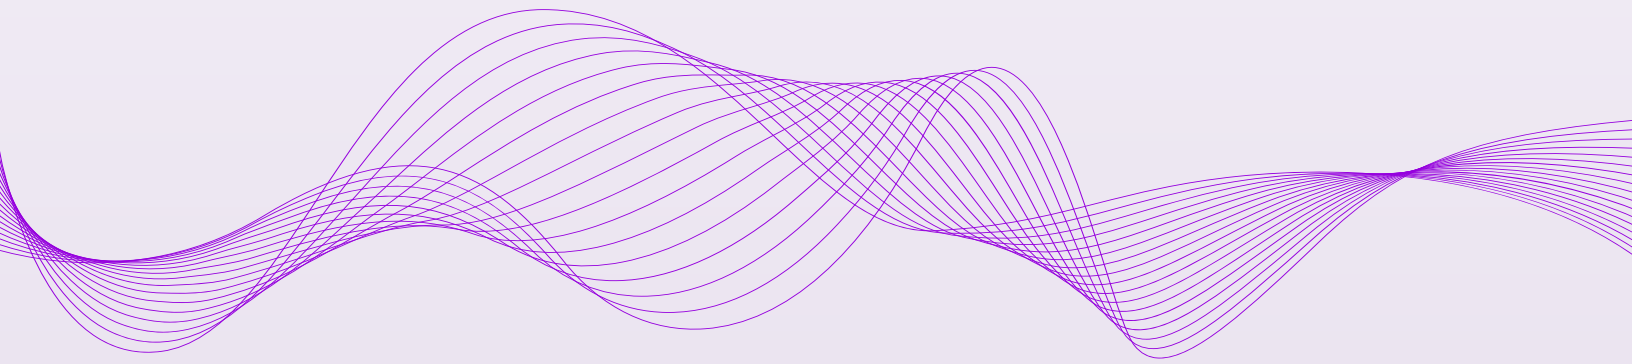

What's included:

A.

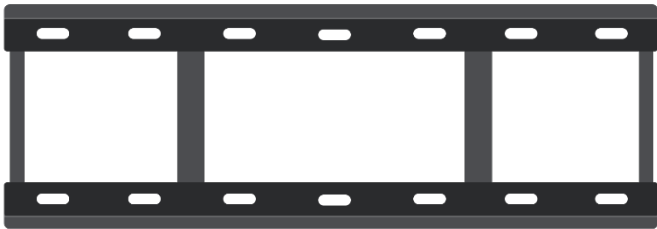

1 x Mounting bracket

B.



8x ($\Phi 10 \times 50\text{mm}$ (1.97"))
Expansion Rubber Plugs

C.



8x ($\Phi 20 \times \Phi 8.5 \times 1.5\text{mm}$ (0.06"))
Gaskets

D.



8 x M7.0 x 55mm (2.16")
Screws


Our touchscreens can be installed on multiple wall types including concrete, brick, and wood stud walls. Ensure that the chosen wall is stable and not subject to movement, capable of supporting at least four times the weight of the mounted equipment. The mounting hardware included with this product may not be adequate for installation on certain wall structures. Use appropriate wall anchors that will support the weight of the panel and mounting bracket for the chosen type of wall.

Note: The images in this document are for illustration purposes only and do not represent the exact shape or size of the parts included. We have included the technical drawing of the mount at the end of the guide for planning purposes.


Assembly Instructions:

Note: For product protection and safety reasons, this product should only be installed by qualified professionals, requiring two or more persons. Before beginning, be sure to follow all local building codes and guidelines.

Step 1: Use the mounting bracket to mark a minimum of eight (8) hole positions on the wall. Use a levelling tool to keep the mounting bracket level. For installation on hollow walls, use a stud locator to find the studs. Position the mounting bracket so that it spans the distance of at least two (2) studs before marking hole positions.

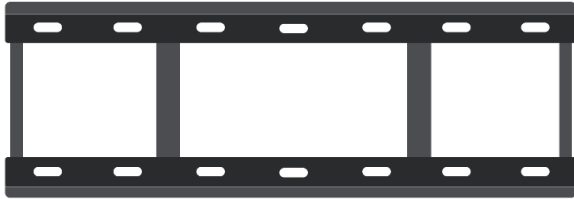


Hold the wall plate against the wall.

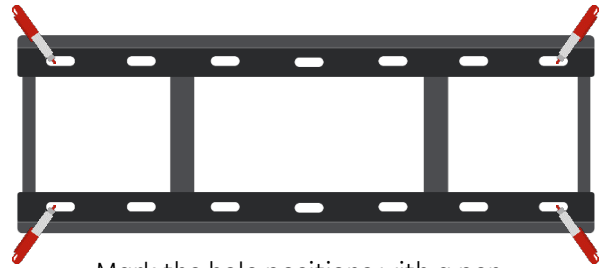


Mark the hole positions with a pen.

Step 2: Remove the mounting bracket and drill eight (8) pilot holes in the marked positions at least 50mm deep when going directly into studs. When fastening to concrete or brick walls, use masonry anchors. Drill holes slightly smaller than the width of your chosen anchor plugs. Hammer in the anchor plugs (labelled B) flush to the wall surface.


Step 3: Reposition and level the mounting bracket (labelled A) on the wall over the holes and tighten using eight (8) screws and washers (labelled C & D).

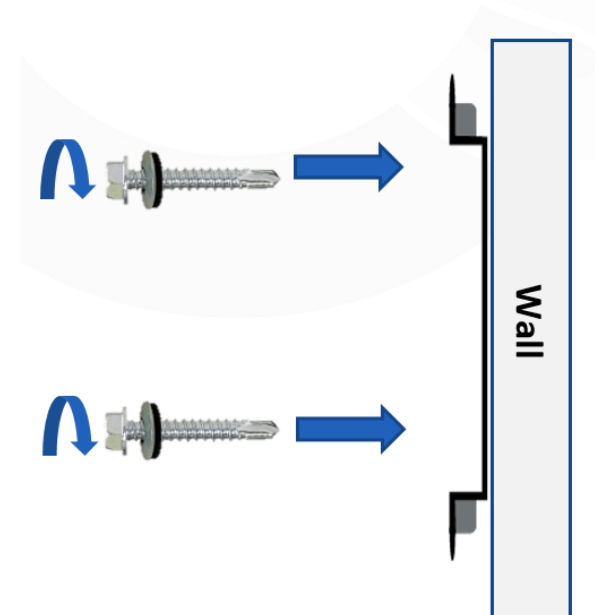


Step 4: Set the screen on the mounting bracket using the mounting arms already attached to the screen.

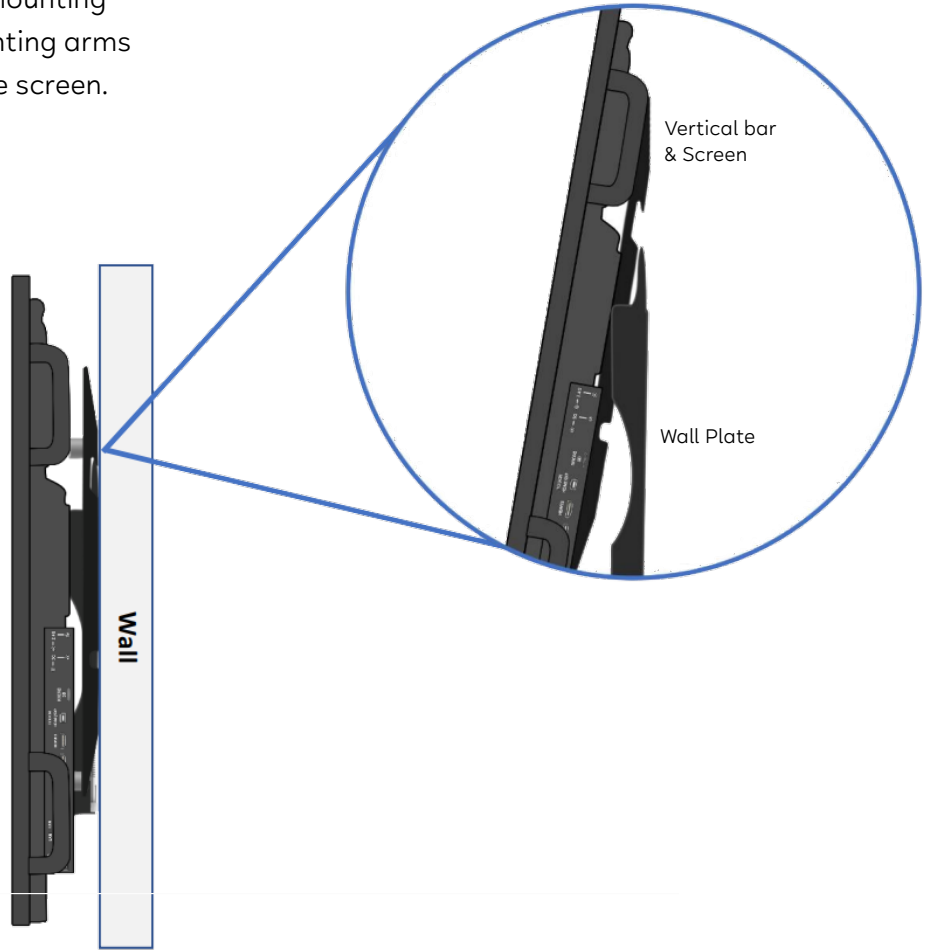

Step 5: Attach and tighten the two (2) safety screws located on the underside of the mounting arms that will secure them to the mounting bracket.

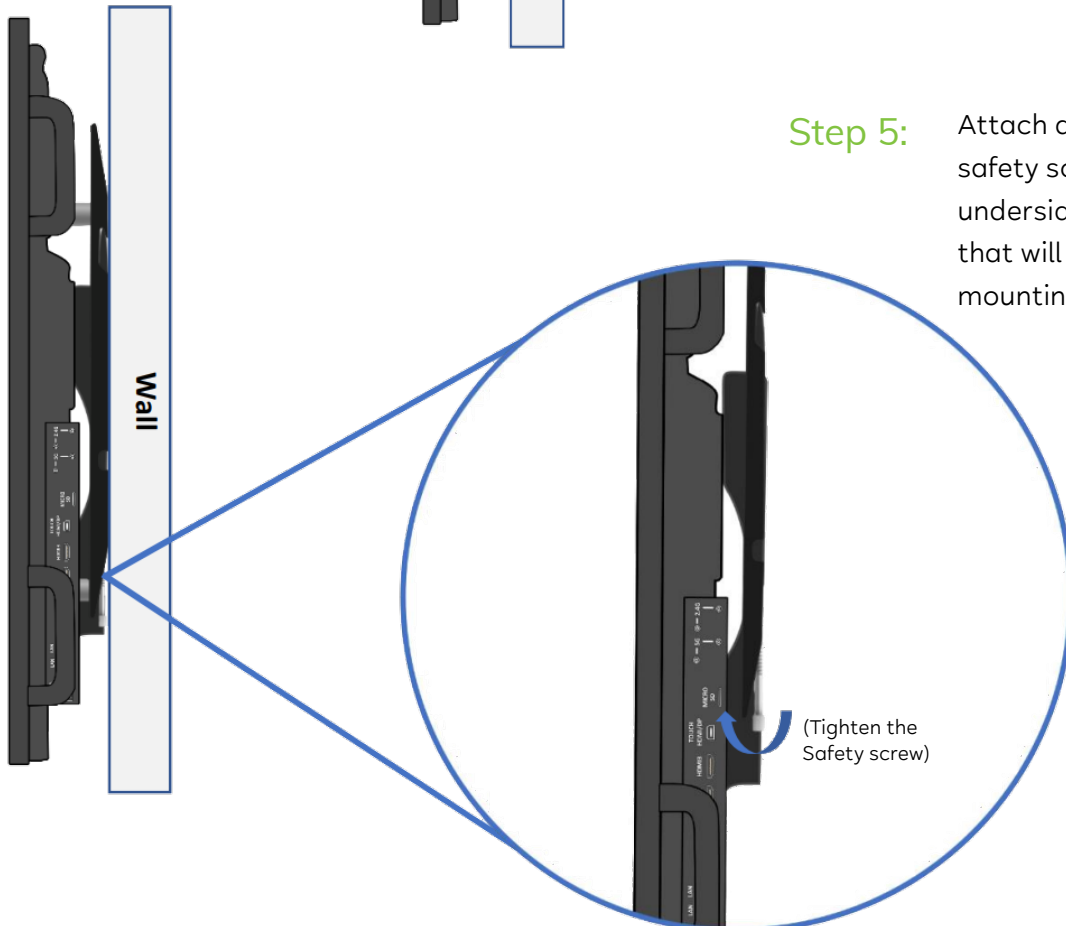

Technical Drawing

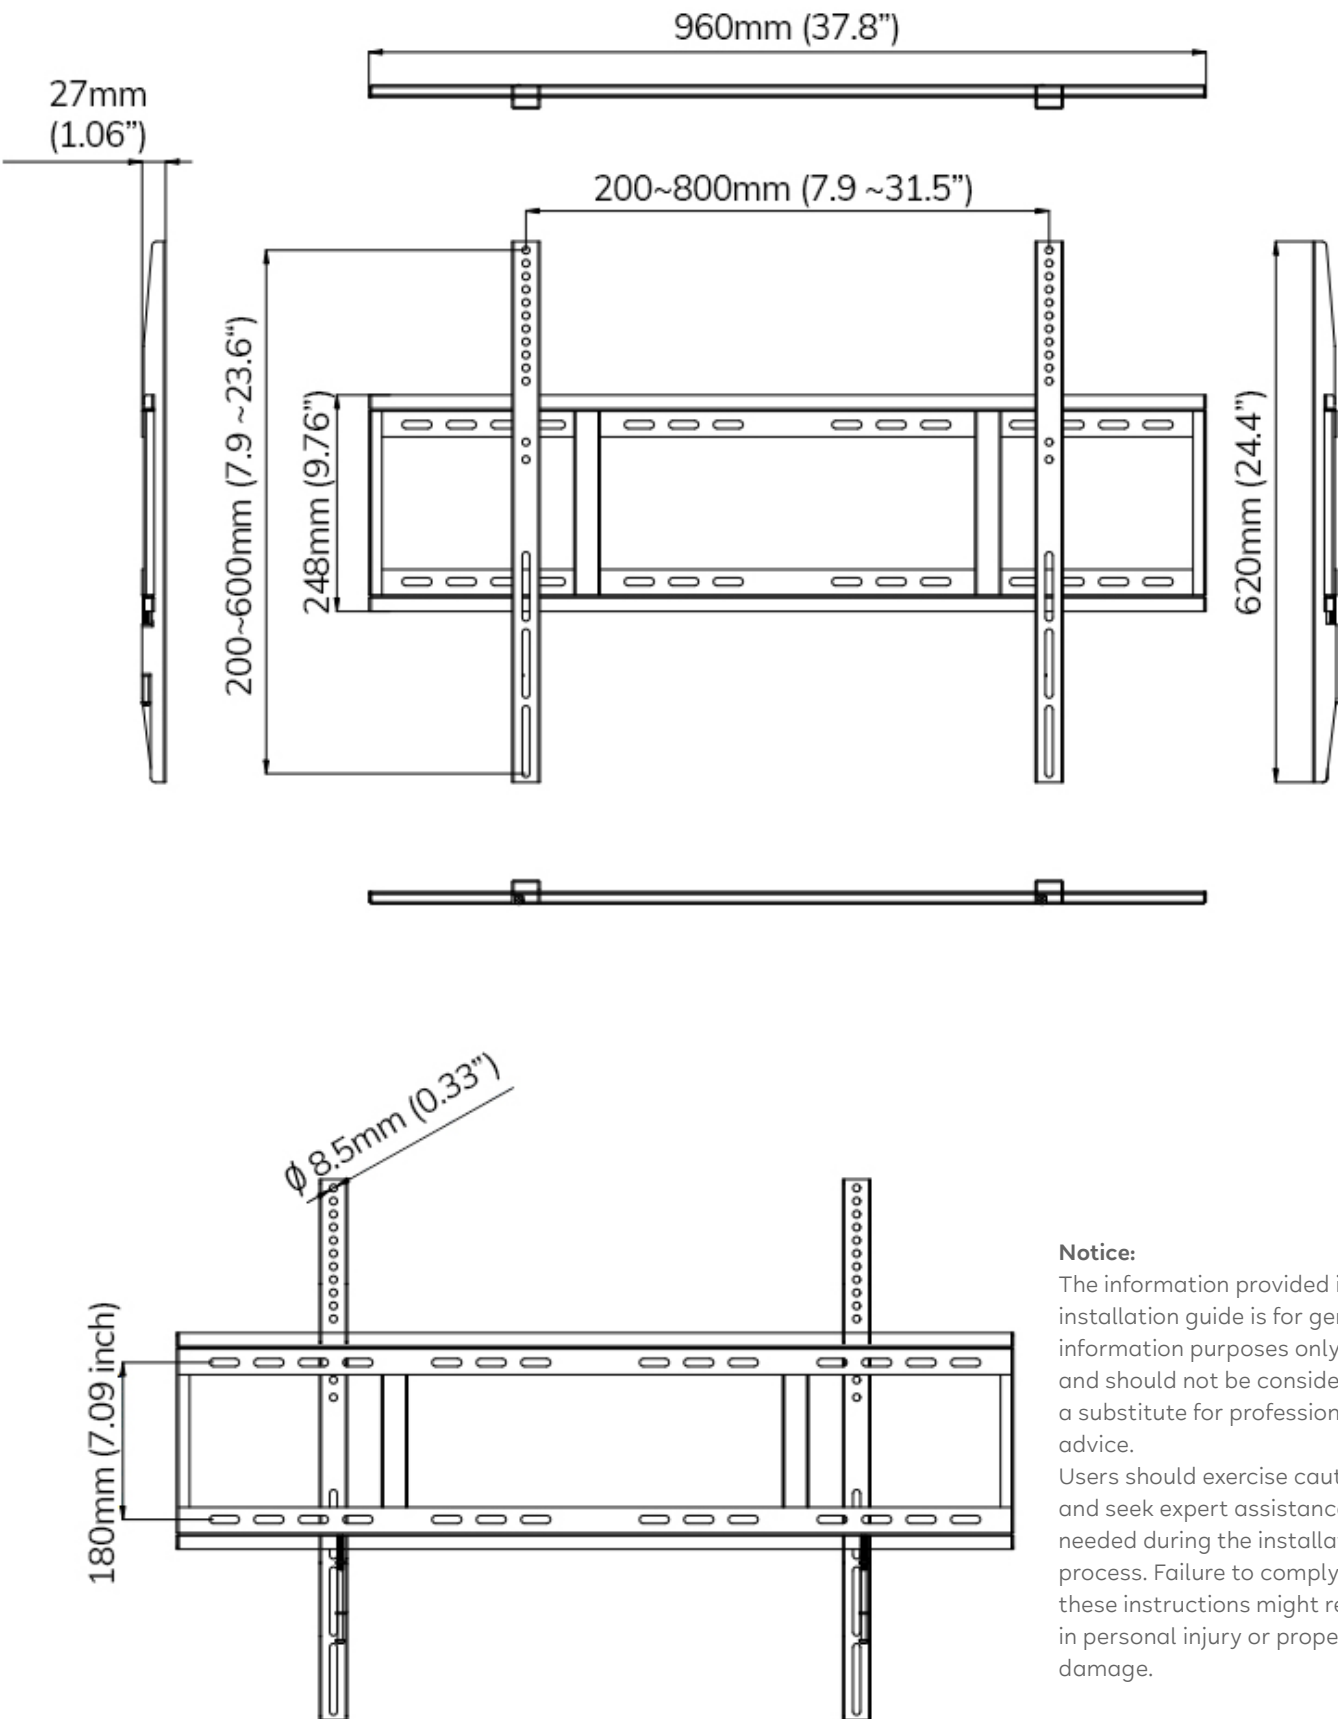

Notice:
The information provided in this installation guide is for general information purposes only and should not be considered a substitute for professional advice. Users should exercise caution and seek expert assistance as needed during the installation process. Failure to comply with these instructions might result in personal injury or property damage.

Additional Documents

You can access additional documents and guides on the product by visiting the resources tab on our website. Access the Resources Tab by scanning the QR code given below.



Contact Support

USA, Canada and Rest of the World

 (+1) 855 898 8111

 support@onescreensolutions.com

Mexico and South America

 (+57) 318 280 3611

 guru.es@onescreensolutions.com

Middle East, Africa and Central Asia

 (+971) 56 410 3115 - Ext: 2001

 support.emea@onescreensolutions.com