label 料号：label Part NO.:

Q40G0047813A02

客 户 Customer	PHILIPS
型 号 Model	32BDL5050D
销 向 Sales Area	EU

安规签核Safety parts:

Yes ■ No □

内销中文字体要求高度1.8mm以上

Yes ■ No □

针对带有UL logo的标签，其厂家须在最小包装上标示UL Recognized Component Mark 公司名称，型号及 UL file no.

条码印刷:
barcode print:

1.所有条码读码等级：C级及以上，客户有特殊要求除外；

REVISION

VERSION A

版本变更说明:
Version Changed Description:

备注Remark:

Aug-29-25
xiaoling.zheng

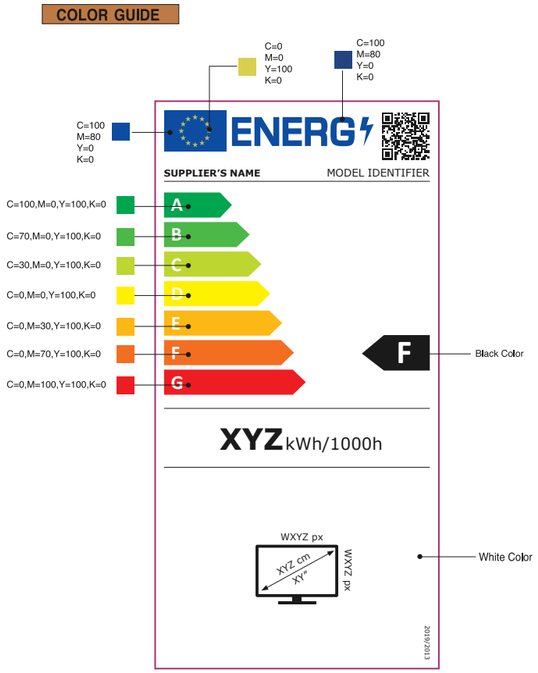

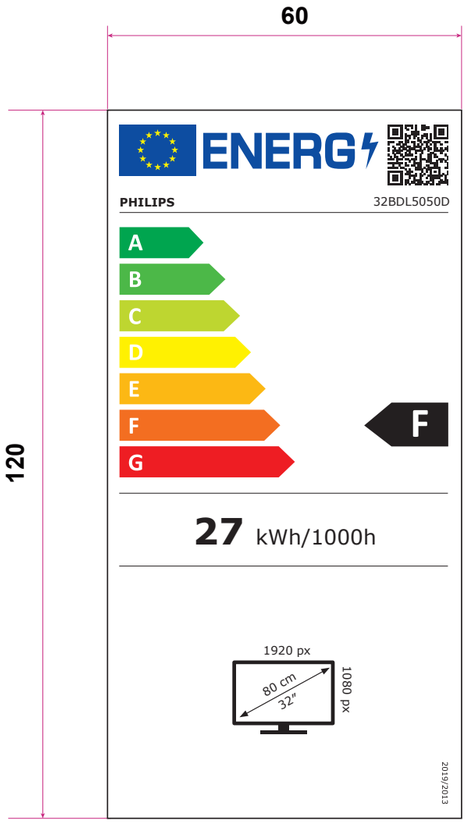

NOTE:
1.印刷如上图
Printing as the drawing
2.尺寸:具体见上图所示（公差：+/-0.2mm)
Dimension:as the above drawing(Tolerance:+/-0.2mm)
3.材质：80g铜版纸带不干背胶, 表面上光油, 贴于纸箱上
4.颜色：如图所示
Color:See the drawing
5.粘着力：在钢板上测试，单位:Kgf/25mm(铜版纸自带永久胶≥1.2Kgf/25mm,PET/PC自带永久胶≥1.2Kgf/25mm)
粘着力测试方法:将label切成25mm宽，长度200mm,一端粘贴于钢板上，以180°方向的力拉label另一端，所得拉力即为粘着力(粘着力为所得拉力的平均值)。用拉力测试仪进行测试。
Adhesion: tested on steel plate, unit: Kgf/25mm (copper paper comes with permanent glue ≥ 1.2Kgf/25mm, PET/PC comes with permanent glue ≥ 1.2Kgf/25mm)
Adhesion test method: Cut the label into 25mm wide and 200mm long, stick one end on the steel plate, pull the other end of the label with a force of 180°, and the tensile force obtained is the adhesive force.(Adhesion is the average value of the obtained tensile force). Use a tensile tester to test.
6.耐高温测试：在钢板上耐温范围为-20～100°C，100°C保持8小时后不翘角,不分层,不脱落,不起泡等。
在被贴物面上耐温范围为-20～65° C，在65°C保持8小时后不翘角,不分层,不脱落,不起泡及无油墨脱、褪色、变色等现象。
High temperature resistance test: The temperature resistance range on the steel plate is -20～100°C. After keeping at 100°C for 8 hours, there will be no warping, no delamination, no falling off, no blistering, etc.
The temperature resistance range on the surface of the affixed object is -20～65°C. After keeping at 65°C for 8 hours, there will be no warping, no delamination, no shedding, no blistering, no ink detachment, fading, discoloration and other phenomena.
7.温湿度循环测试：循环条件：在被贴物面上，温度-20～65°C，湿度30～90%，时间 96小时。每分钟温度变化不低于5°C,时间96小时后不翘角不分层不脱落不起泡及无油墨脱、褪色、变色等现象。
Temperature and humidity cycle test: cycle conditions: on the surface of the object, the temperature is -20～65°C, the humidity is 30～90%, and the time is 96 hours. The temperature change per minute is not less than 5°C, and the angle will not be warped after 96 hours
No delamination, no shedding, no blistering, no ink detachment, fading, discoloration, etc.
8.包装方式：卷状
9.裁切需均匀且印刷不可有溢墨及颜色不均等不良现象
Printing ink can not have overflow and printing color can not be uneven etc.
10.其它测试要求详见（FQ-背胶类产品测试检验规格）

冠捷电子科技（福建）有限公司
TPV Electronics (Fujian) Co., Ltd.
地址(Add)：中国福建省福清市元洪路上郑Shangzheng,Yuanhong Road, Fuqing City, Fujian Province, China
电话(Tel)：+86-591-85285555 85285559
传真(Fax)：+86-591-85285447
邮编(Postcode)：350301

1） 根据 TPV 推行 RoHS 的有关规定，
所有的原材料及辅助材料必须符合 RoHS 的有关规定
2）所有原材料的规定物质：如镉（Cd) 汞（Hg) 铅（Pb) 六价铬 PBB's PBDE's 及镉（Cd)+汞（Hg)+铅（Pb)+六价铬（针对随机出货的包装材料）的具体含量依据最新版 RD EMS-01<<供应商环境管理物质管控标准>>的具体限值要求执行

1)According to the rule abut RoHS of TPV,All raw material and assistant material and assistant material should accord with the rule of RoHS
2)All the stated substance of raw material: the actual content of Cd/Hg/Pb/Cr/PBB's/PBDE's and Cd+Hg+Pb+Cr(aim at the packing material with the product), should accord with the latest version of RD EMS-01<<The controlled standard aboutenvironment substance for supplier>>.