



Contents

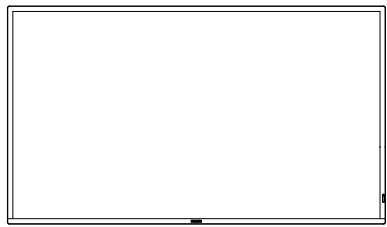

LCD Display



Remote Control and AAA Batteries



Quick Start Guide



Power Cord



IR Sensor Cable




Philips Logo Plate


* Differences according to regions.
Display design and accessories may differ from those illustrated above.




1 Unboxing

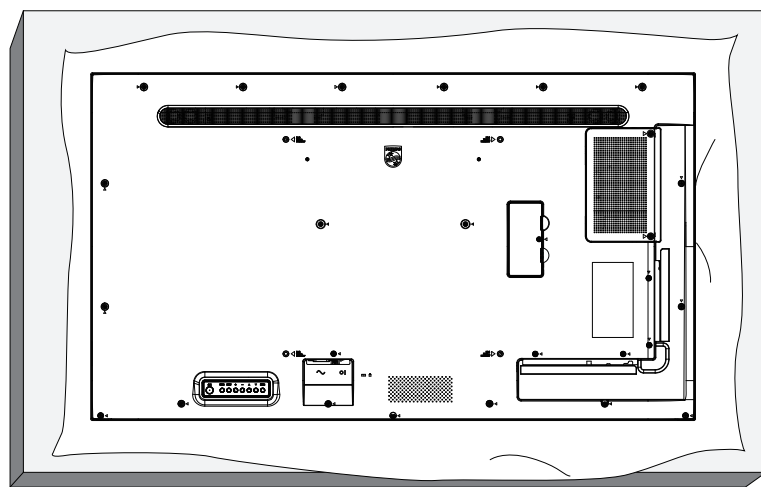


2 Control Panel

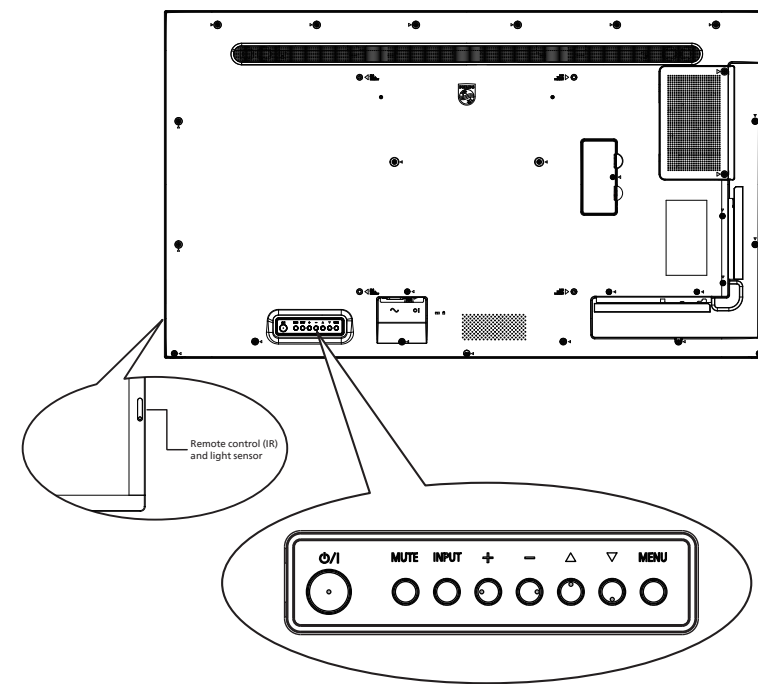


3 Input/Output Terminals

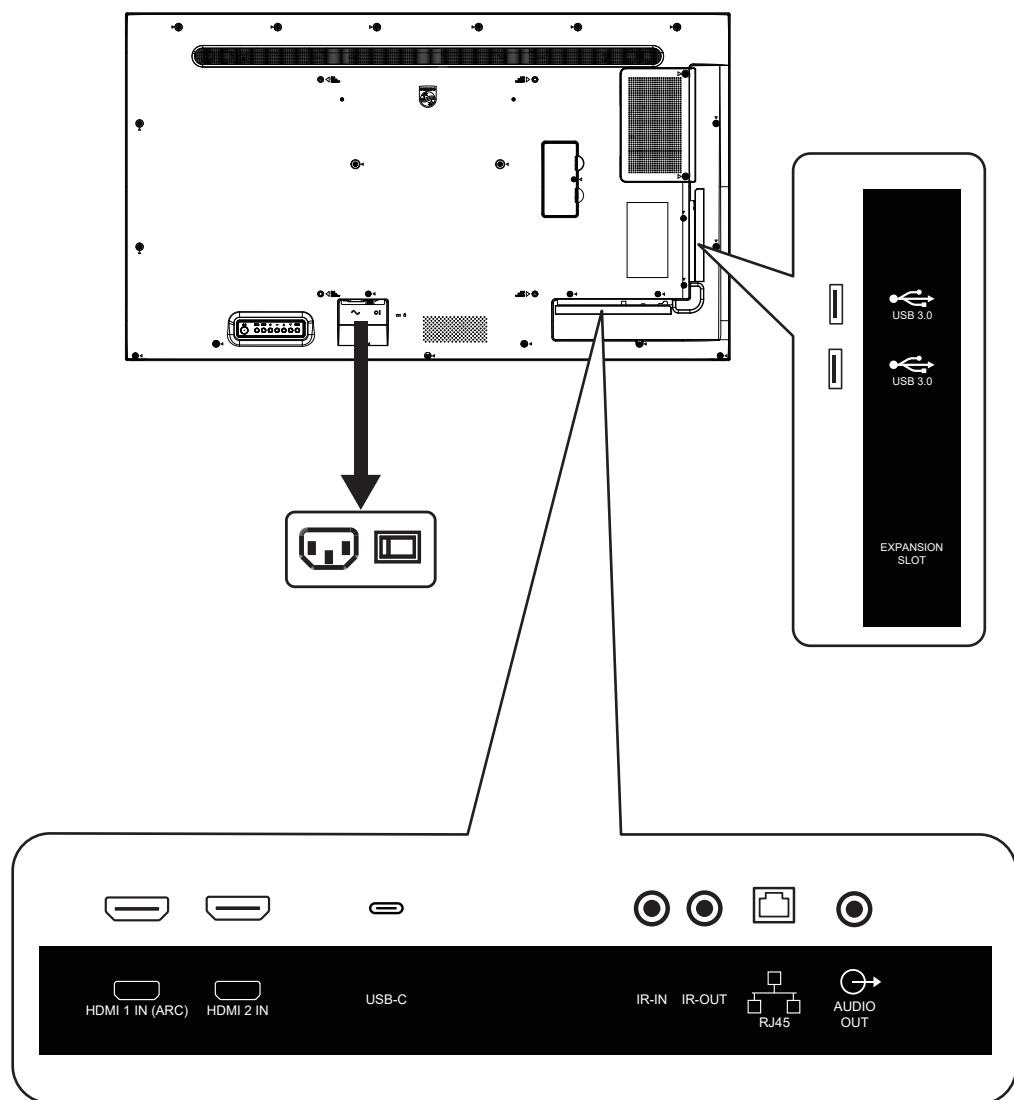

4 Connection


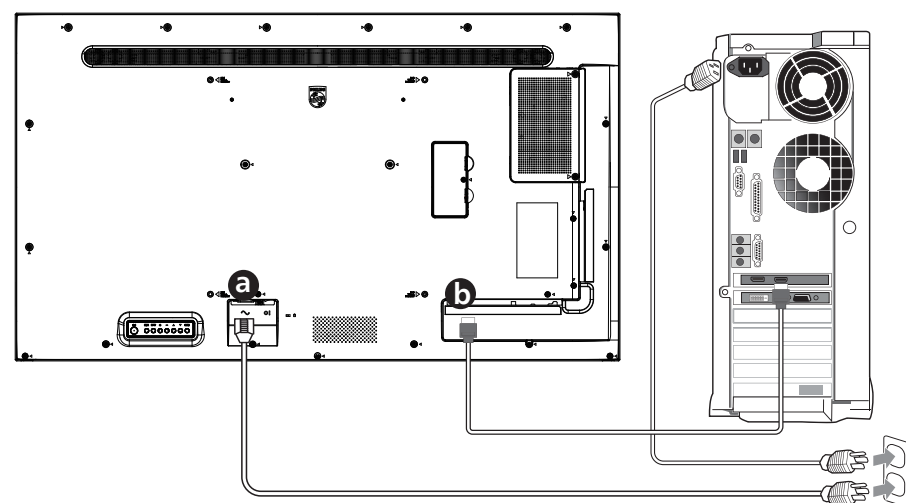


AC IN





HDMI

5 Installation

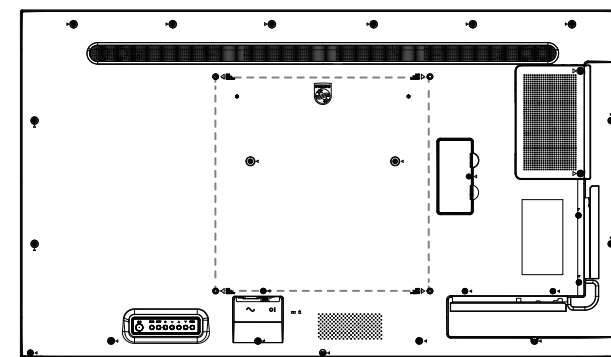

M6 * (10+X) mm
(X=Thickness of Wall Mount BKT)
43BDL2050A: 200mmx200mm
50BDL2050A: 400mmx400mm
55BDL2050A: 400mmx400mm

6 Mounting in Portrait Orientation

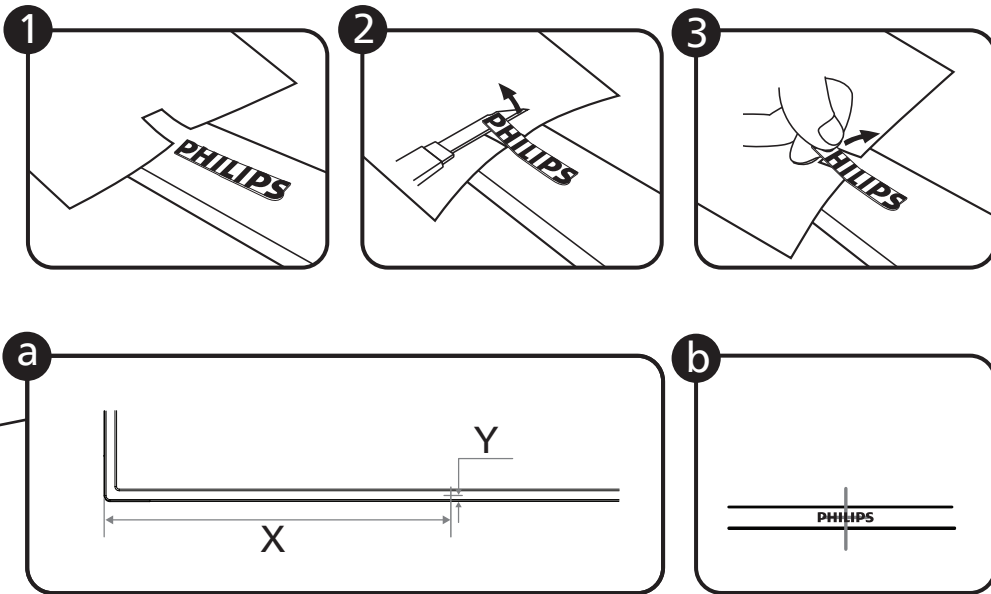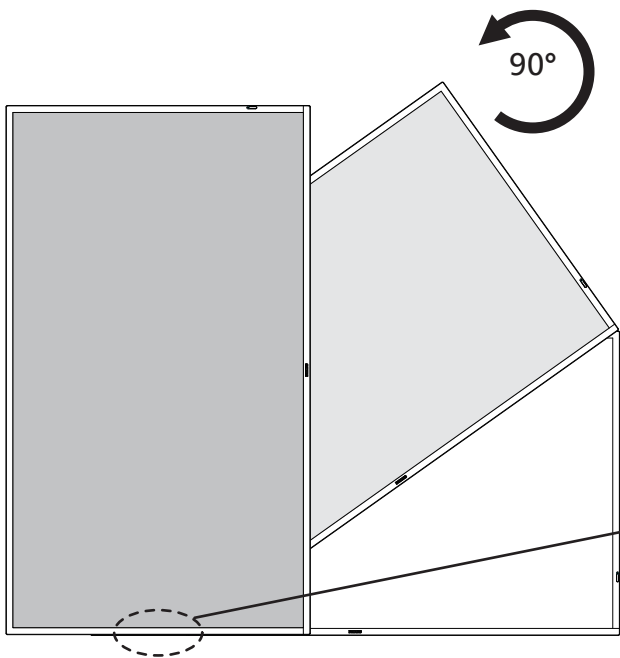


43BDL2050A: X=280.6mm Y=7.4mm
50BDL2050A: X=324.5mm Y=7.9mm
55BDL2050A: X=356.3mm Y=7.4mm

PHILIPS

Signage Display
2000 Series

43BDL2050A
50BDL2050A
55BDL2050A

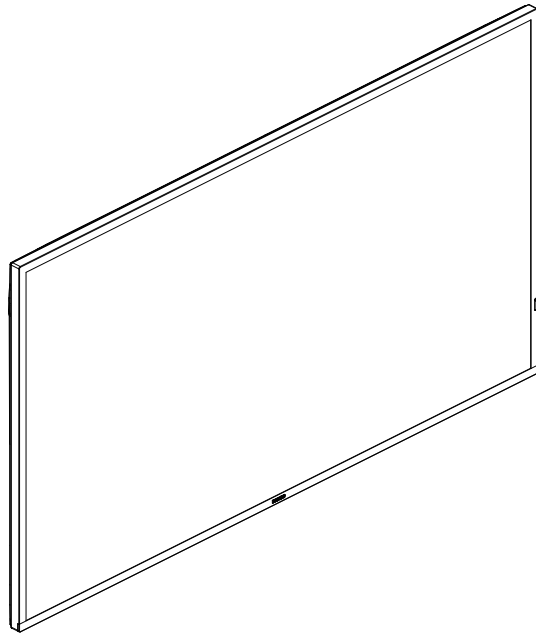

Quick start



For more information, please visit:
<https://www.philips.com/ppds>

EU Energy Labelling



43BDL2050A



50BDL2050A



55BDL2050A



2026 © MMD Hong Kong Holding Limited. All rights reserved.

This product has been manufactured by and is sold under the responsibility of MMD Hong Kong Holding Limited, and MMD Hong Kong Holding Limited is the warrantor in relation to this product. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. and are used under license.

Specifications are subject to change without notice.

Version: V1.00 2026-04-14



Q41G55M281329A