


Key Features

- Keep content visible in bright spaces with 700-nit brightness and anti-glare haze
- Deliver smooth 4K playback and multitasking powered by Android 14 octa-core processing
- Integrate easily into signage systems via USB-C, HDMI, and CMS compatibility
- Simplify professional installations with hidden cable routing and LAN passthrough
- Centralize remote management using ViewSonic Manager scheduling and monitoring tools



Product Description

The ViewSonic EP5543 is a commercial ePoster designed for always-on visual communication in corporate, hospitality, and higher education environments. Featuring 700-nit brightness with 25% anti-glare haze and reliable 24/7 operation, the EP5543 delivers clear, impactful messaging in brightly lit commercial spaces. An all-in-one freestanding design with a built-in Mini PC compartment, integrated AC power output, and hidden cable routing streamlines deployment without wall mounting or complex IT setup. Built on an octa-core Android 14 platform with 8GB RAM and 128GB storage, the EP5543 delivers smooth 4K multimedia playback and reliable commercial performance. Pre-installed with Revel Digital CMS and supporting additional platforms via Google Play Store, it enables centralized content management with support for JPEG, PNG, MP4, and HTML5. Ideal for corporate communications, campus announcements, and hospitality signage, the EP5543 delivers clear, always-on visual communication.

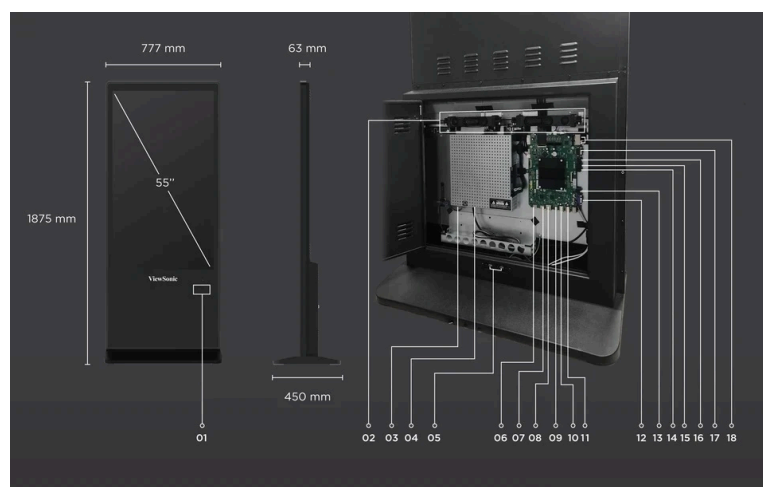

- | | | |
|-------------------------|-----------------------------|-----------------------|
| 1. Remote IR sensor | 8. DP-In x1 & HDMI-In x1 | 15. Audio Out |
| 2. Internal Speakers | 9. USB Type C | 16. SPDIF |
| 3. AC-IN & Power switch | 10. USB Type A 3.2 Gen 1 x2 | 17. RS-232 |
| 4. AC Out | 11. USB Type A 2.0 x2 | 18. LAN x2 (In & Out) |
| 5. USBx2 (rear housing) | 12. VGA In | |
| 6. HDMI-Out | 13. Audio In | |
| 7. HDMI-In | 14. Mic In | |

DISPLAY

Panel Size:	55"
Type/Tech:	TFT LCD (ADS type, DLED backlight)
Display Area (mm):	1209.6(H) x 680.4 (V)
Aspect Ratio:	9:16
Native Resolution:	2160 x 3840
Colors:	1.07G (8 bit + FRC)
Brightness:	700 nits (typ.)
Contrast Ratio:	1200:1 (typ.)
Response Time:	8 ms
Viewing Angles:	H= 178 , V=178 (typ).
Backlight Life:	30,000 hours (typ.)
Surface Treatment:	Anti-Glare, pencil hardness 7H, Haze=25%
Orientation:	Portrait

INPUT

HDMI:	(2.0) x 2
RGB / VGA:	x1
DisplayPort:	(1.2) x1
Audio:	x1 (3.5mm)
MIC(Microphone):	x1 (3.5mm)
RS232:	x1

OUTPUT

HDMI:	X1
Audio:	x1 (Earphone out)
SPDIF:	x1

LAN

RJ45:	x2
-------	----

USB

Type A:	x4 (2.0x2 ; 3.0x2)
---------	---------------------

OTHERS

Type-C x1 (USB2.0, DP1.2. PD15W)

SPEAKERS

20Wx2

COMPATIBILITY

RGB PC/HDMI PC:	1920x1080@60Hz
HDMI:	2160x3840 @60Hz
DisplayPort:	2160x3840 @60Hz

ANDROID VERSION

14.0

MULTIMEDIA

Photo: JPG, BMP, PNG Video: MP4, MOV, MKV, DAT, MPG, MPEG, AVI, TS, WMV, RM, RMVB, FLV Audio: MP3, WAV, AAC, AVI. MKV

PRELOADED SOFTWARE*

Revel Digital Player (Activation requires a separate subscription license, sold separately for Revel Digital.)
Manager

POWER

Voltage:	100~240VAC +/- 10% wide range
Consumption:	61.7W (Typ.), 230W (Max.) Standby mode < 0.5W ; Off mode <0.3W

OPERATING CONDITIONS

Temperature (° C):	0°C to 40°C
Humidity:	20% ~ 80% non-condensing

DIMENSIONS (W X H X D)

Physical (inch / mm):	30.64 x 73.82 x 17.72 inches / 778.5 x 1875 x 450 mm
Packaging (inch / mm):	38.19 x 80.08 x 23.98 inches / 970 x 2034 x 609 mm

WEIGHT

Net (lb / kg):	138.89 lbs / 63 kg
Gross (lb / kg):	159.84 lbs / 72.5 kg

REGULATIONS

cTUVus, FCC, Energy Star 8.0, CE, CB, RoHS, ErP, EEI, WEEE
--

PACKAGE CONTENTS

• Power cord • Remote control • Bottom metal cover and screws • Key • Quick start guide • Compliance statement
--