

Pair CTP25 with Yealink MeetingBoard Pro

Introduction

After pairing is complete, you can control MeetingBoard Pro on the CTP25 to perform operations such as conferencing and screen projection.

Before you Begin

- For the compatibility of CTP Touch Panel and Yealink MeetingBoard, refer to [Rooms Accessories Compatibility Lists](#).
- For how to install the CTP Touch Panel, refer to [Yealink CTP25 Quick Start Guide](#).


Connect CTP25 to MeetingBoard Pro

Direct Connection

- Use a network cable to connect the VCH port of the MeetingBoard Pro to the Internet port of the CTP25.


MeetingBoard Pro

* Connector Panel (Left)

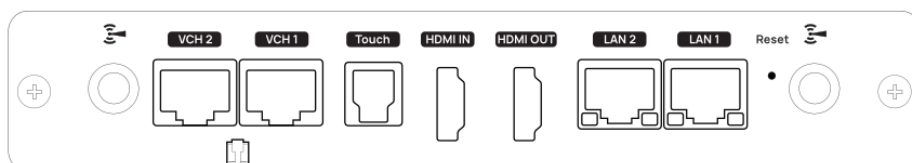

CTP25

* Connector Panel (Back)

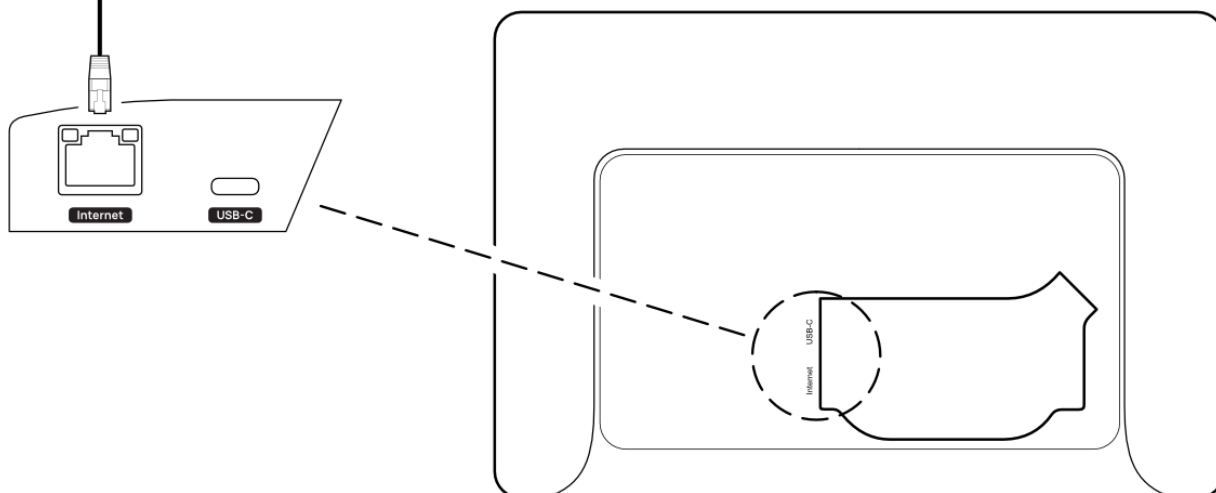


LAN Pair

1. Use a network cable to connect the Internet port to the external network port.

! The MeetingBoard Pro and the CTP25 must be on the same LAN.

2. Use the power adapter to connect the CTP25 to the power port.

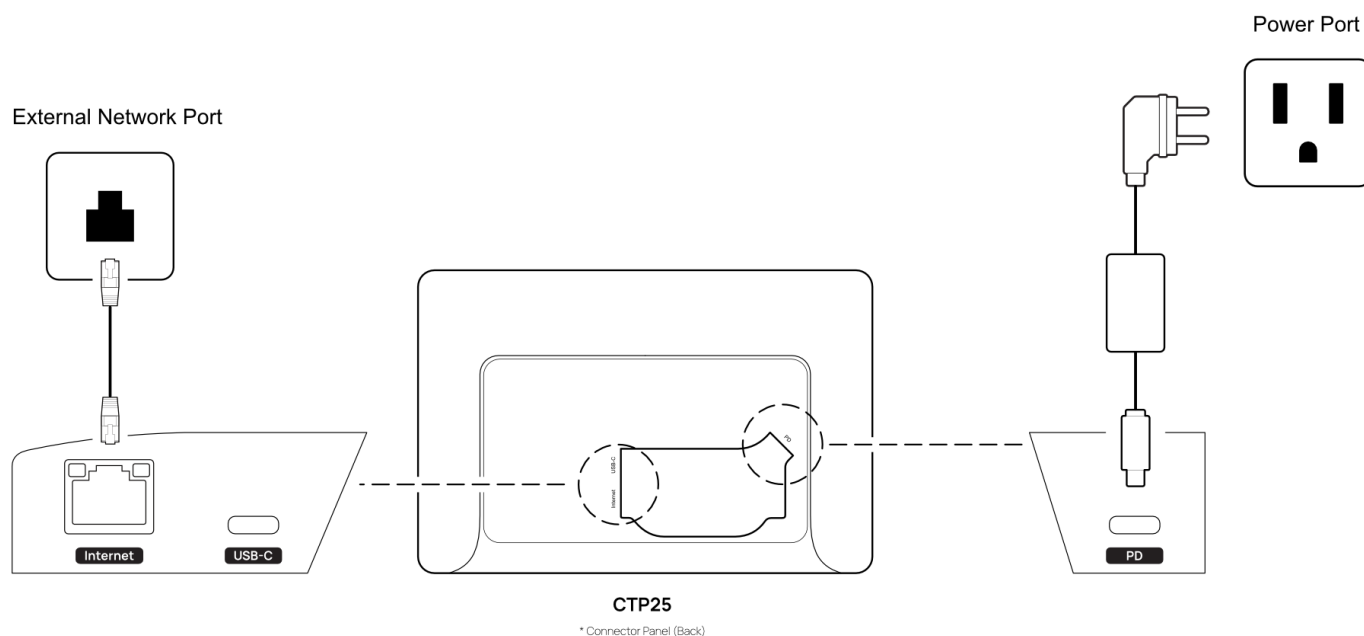


Pair CTP25 with MeetingBoard Pro

! If you choose the direct connection method, pairing is not required.

Auto Pair


- On the CTP25 screen, select the device you need to pair, and tap **Pair**.

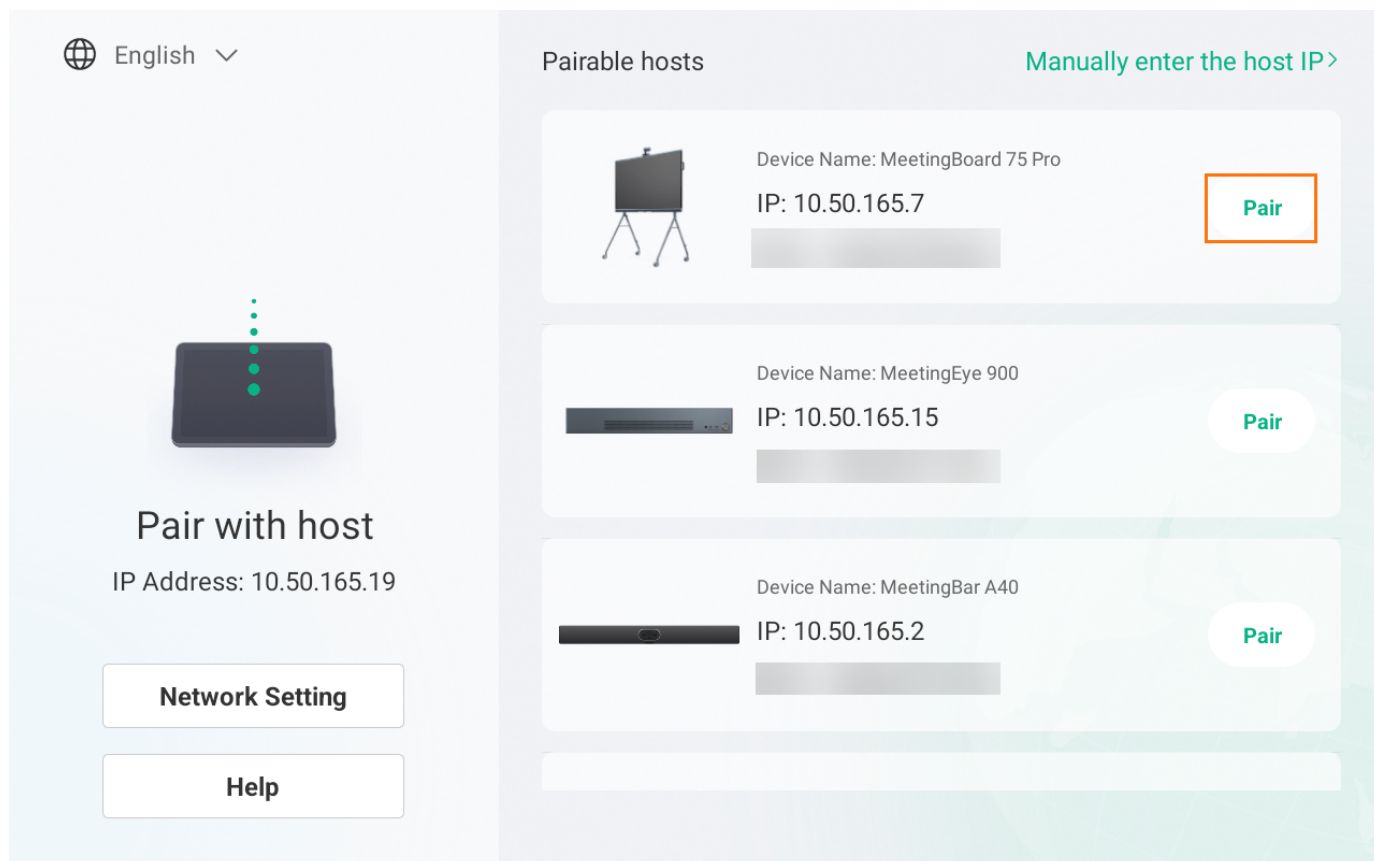


Manual Pair

If the host is not found in the list, you can manually enter the host IP for pairing.


1. On the MeetingBoard Pro screen, tap **Settings** > **About**, and find the device IP address.
2. On the CTP25 screen, tap **Manually enter the host IP**.

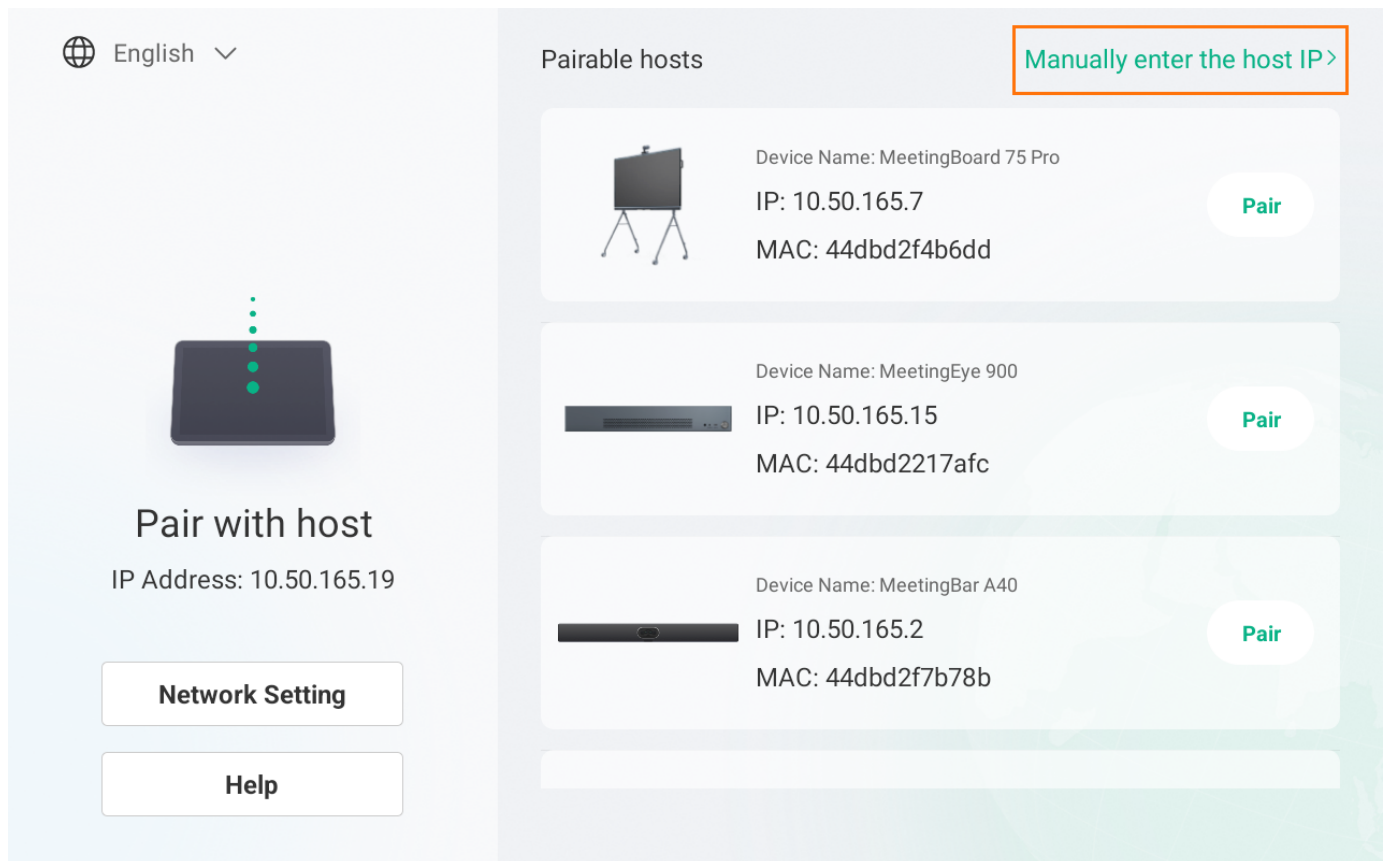


3. Enter the device IP address, and tap **Pair**.

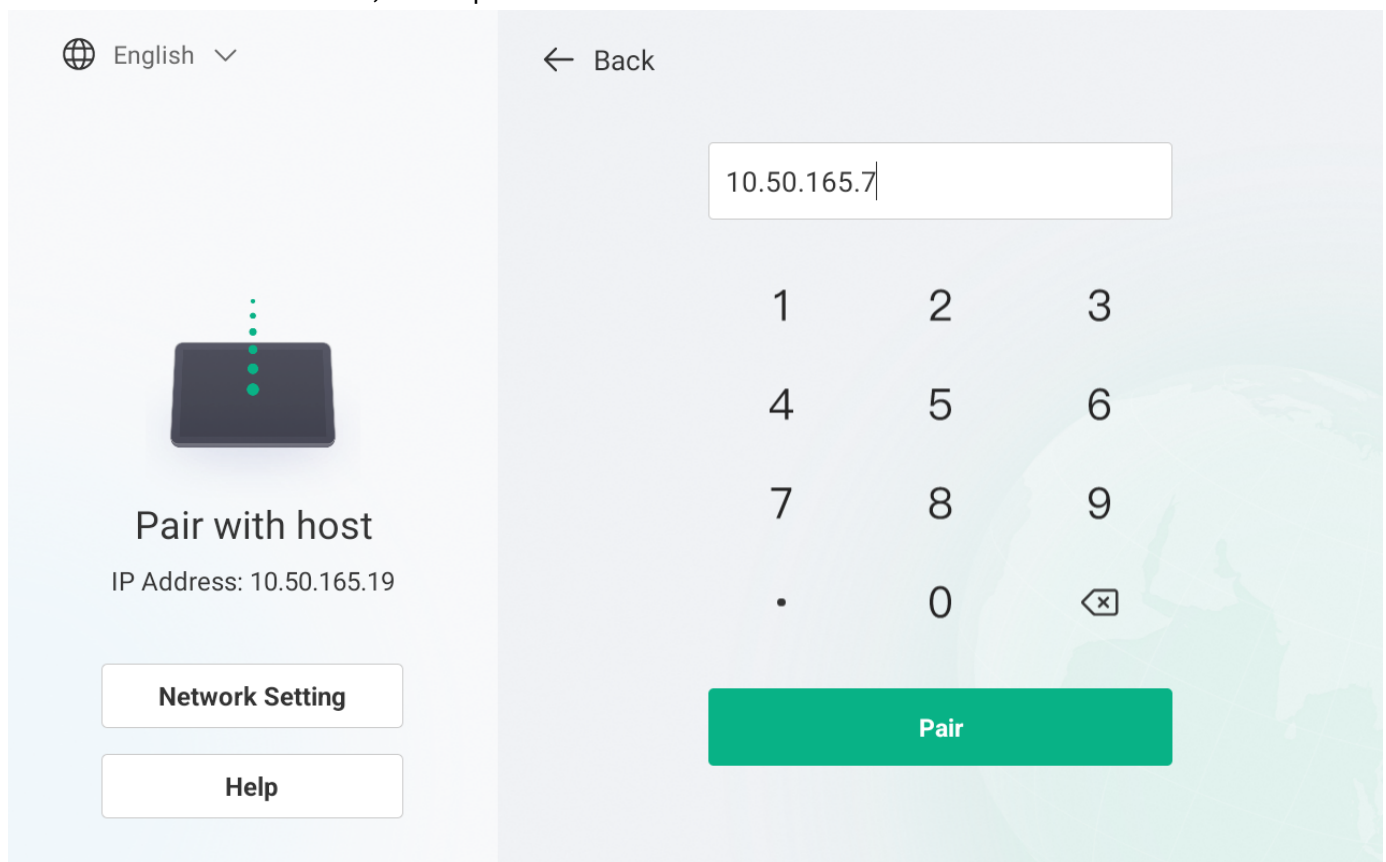

4. Enter the pairing code displayed on the MeetingBoard Pro screen.

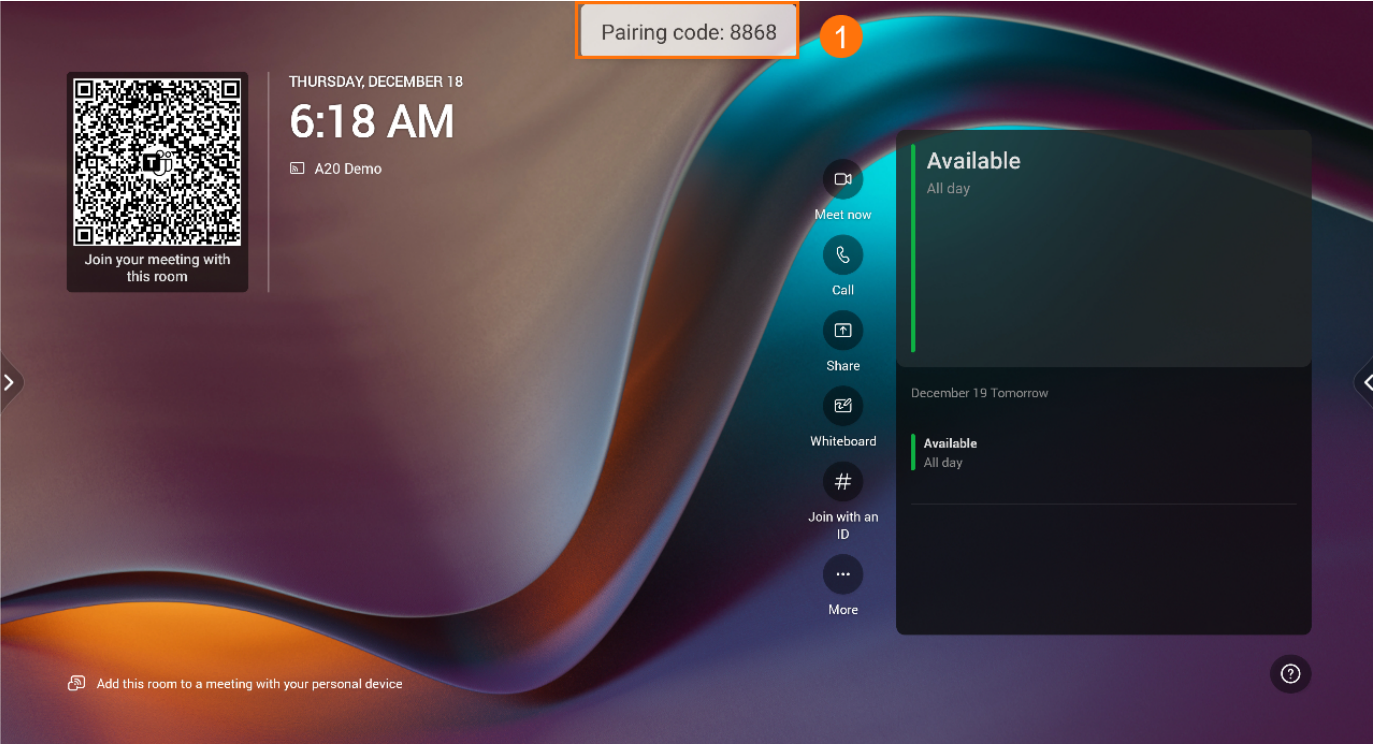

MeetingBoard Pro

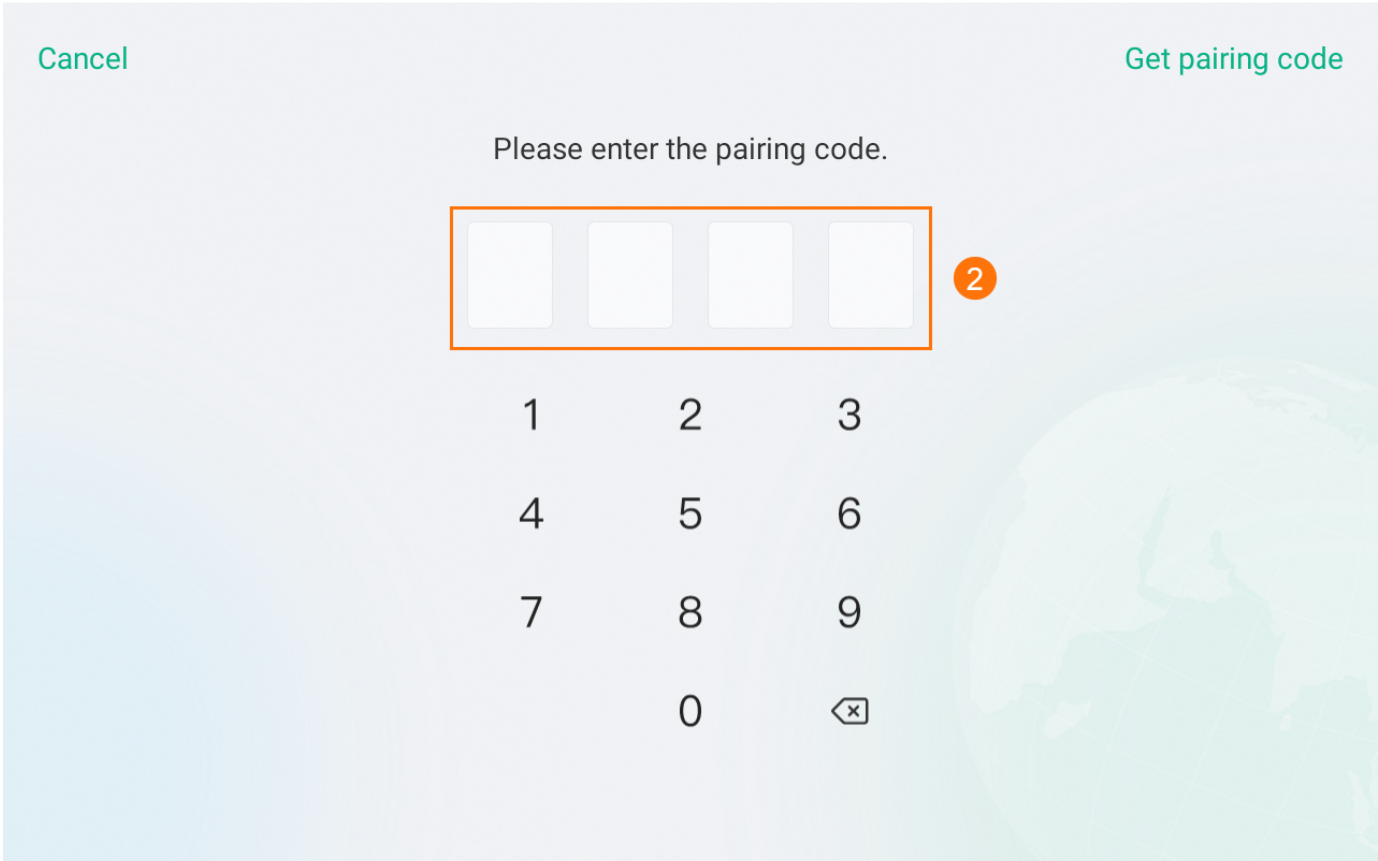

CTP25