

PANACAST U30

Custom Wallpapers



ENHANCED BYOD

BYOD rooms bring flexibility into the meeting space for environments that use more than one video platform or don't wish to use a dedicated in-room compute. As BYOD configurations have evolved, not all rooms may use the same cable configurations. In order to educate end users on how to start their meetings, IT admins often use print-outs laid on the table or walls that could get lost or become out-of-date. Instead, having instructions shown directly onto the front of room display keeps things tidy.

PanaCast U30's enhanced BYOD mode already has a built-in default standby screen, instructing users on how to plug in their computers. However, IT admins may want to customize that screen to either match their company logos and colors, provide more detailed instructions for configuration, or to simply use the screen as a sort of digital signage while a meeting is not in use.

DEFAULT BYOD WALLPAPERS


There are two built-in options for wallpaper: **USB-C cable instructions** and **USB-C and HDMI cable instructions**. Note that single-cable USB-C BYOD configurations are compatible with laptops using DP-Alt mode. Older laptops without DP-Alt mode may still require both HDMI and USB-C to run a BYOD meeting. If the wallpaper is set to the USB-C instructions and a user attempts to use single-cable BYOD with a laptop that does not support DP-Alt mode, the U30 will prompt the user to connect an HDMI cable.

CONFIGURE CUSTOM WALLPAPER

Custom wallpapers can be configured if the device is set to Jabra as the service provider. To configure a custom wallpaper, create an image in either **PNG** or **JPG** format. For best results, it is recommended to create an image with a 16:9 image ratio (1920x1080 pixels). The maximum file size supported is 10 MB.

Navigate to the device's Web Console settings by entering its IP address into a web browser. Login with the username and password. If this is your first time logging in to the device, the default username is **admin** and the password is the last 6 characters of the device's serial number.

Select the **System** tab on the left-hand side, then **Bring-Your-Own-Device**. Navigate to the **Default Screen** section and click the radio button for **Custom Wallpaper from Web Console**. Then, select the up arrow to upload a file. Click **Save** on the top.

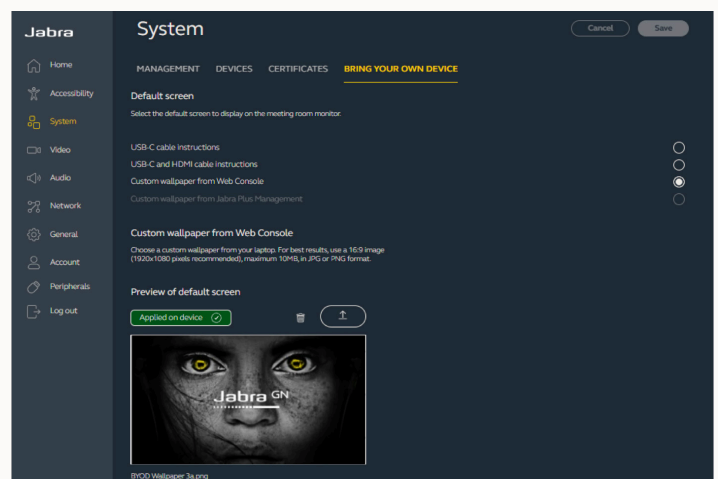

SYSTEM REQUIREMENTS

Custom Wallpapers is supported on the PanaCast U30 running Value Pack 1 and later with Jabra BYOD selected as the service provider. Custom wallpapers are planned to release with other PanaCast video bars in future value pack updates.

