Accessories

- Base (1pcs)
- Lifting column (1pcs)
- Wall Mount (1pcs)
- Salver(1pcs)
- Control pad box
- Hanging bar (2pcs)
- Control pad (1pcs)
- AC Power Cable (1pcs)
- USB transferable Cable(1pcs)
- AC Power transferable Cable (1pcs)



A -Base(1pcs)



B-Lifting column -(1pcs)

C-Wall Mount (1pcs)

D-Salver(1pcs)

E- Control pad box

F- Hanging bar (2pcs)

G-Control pad (1pcs)

H-AC Power Cable (1pcs)

I-USB transferable Cable (1pcs)

J-AC Power transferable Cable (1pcs)

Other accessories：

①Hexagon socket countersunk head screws	KM10*25	4pcs	
②Cross recessed pocket hexagon head screw	M8*25	8pcs	
③Cross recessed pocket hexagon head screw	M5*15	2pcs	
④Cross recessed T-head with collar screw	TM4*6	9pcs	
⑤Plastic bolts	/	4pcs	
⑥Hex nut	6mm	1pcs	
⑦Cross recessed pocket hexagon head screw	M6*20	4pcs	
⑧Cross screwdriver (Self-Provided)	/	1pcs	
⑨Monkey spanner (Self-Provided)	/	1pcs	

1 Step1: Install the Wall Mount C on the lifting column B (figure 1).



figure 1

2 Step2: Install the Salver D on the lifting column B(figure 2).



figure 2

3 Step3: Connect the power cable between the lifting column B and the base A, install the lifting column and tighten the screws (figure 3).

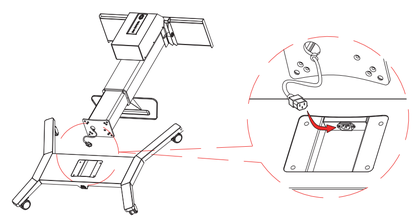

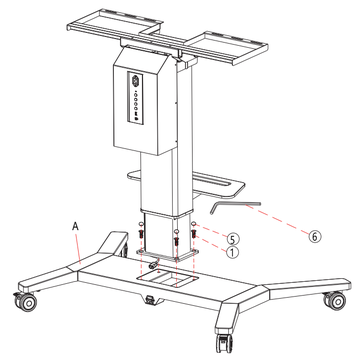

figure 3

4 Step4: Install the Control pad box E on the lifting column B (figure 4).



figure 4

5 Step5: When using the Electric Stand, the control pad and the AC power cable should be connected to the Electric Stand, and connected to the power supply (figure 5).



figure 5

6 Step6: Turn the Wall Mount C from horizontal to vertical. For details, refer to the Quick Start Guide.(figure 6).

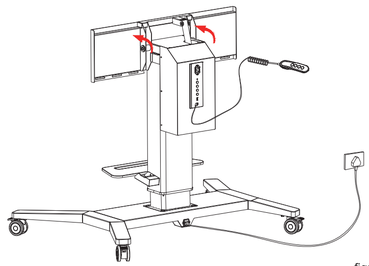

figure 6

7 Step7: Assemble the Interactive Flat Panel and hanging bar F with right screw（②or⑦）based on actual use demand. (figure 7).

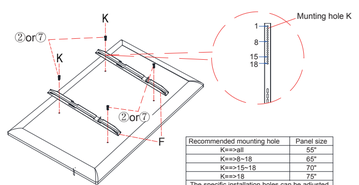

Recommended mounting hole	Panel size
K==>all	55"
K==>8~18	65"
K==>15~18	70"
K==>18	75"

The specific installation holes can be adjusted according to the actual needs, refer to the installation height of the intelligent panel.

figure 7

8 Step8: Hang the Interactive Flat Panel to the Electric Stand by Wall Mount, and tighten the screws (figure 8).



figure 8

9 Step9: Plugging the AC Power transferable Cable and the USB transferable Cable in, user can interact with the Interactive Flat Panel (figure 9).



figure 9

10 Step10: Done, as shown in figure 10.



figure 10

Electric Stand Installation Guide



- For using this product properly and safely, please follow the contents of the Installation and Operation Manual to install.
- It is suggested that this Electric Stand applies to the 55-75 inch intelligent panel.
- This stand can carry a maximum weight of 100KG.