

Pair VCM35 with Yealink MeetingEye


Introduction

Yealink VCM35 is a wired video conferencing microphone array specially designed for the new generation of Yealink Video Conferencing System. Its built-in 3-microphone array with a 20ft (6m) and 360° voice pickup range is an ideal solution for any conference room that needs the best audio experience. With the Yealink Acoustic Echo Canceling and Yealink Noise Proof Technology, Yealink VCM35 can effectively reduce ambient noise up to 90 dB and give you a high-quality audio experience in full-duplex calls. Yealink VCM35 supports star-cascaded deployment, and its extremely high scalability and flexibility make deployment more convenient and faster and can fully cover conference rooms of various sizes.

Before You Begin


- For the compatibility of VCM35 and Yealink MeetingEye, refer to [Rooms Accessories Compatibility Lists](#).
- For how to install the VCM35, refer to [Yealink VCM35 Quick Start Guide](#).
- A PoE switch is required to connect more than two VCM35.
- A PoE switch is required to connect VCM35 and VCH51 at the same time.

Connect one or two VCM35

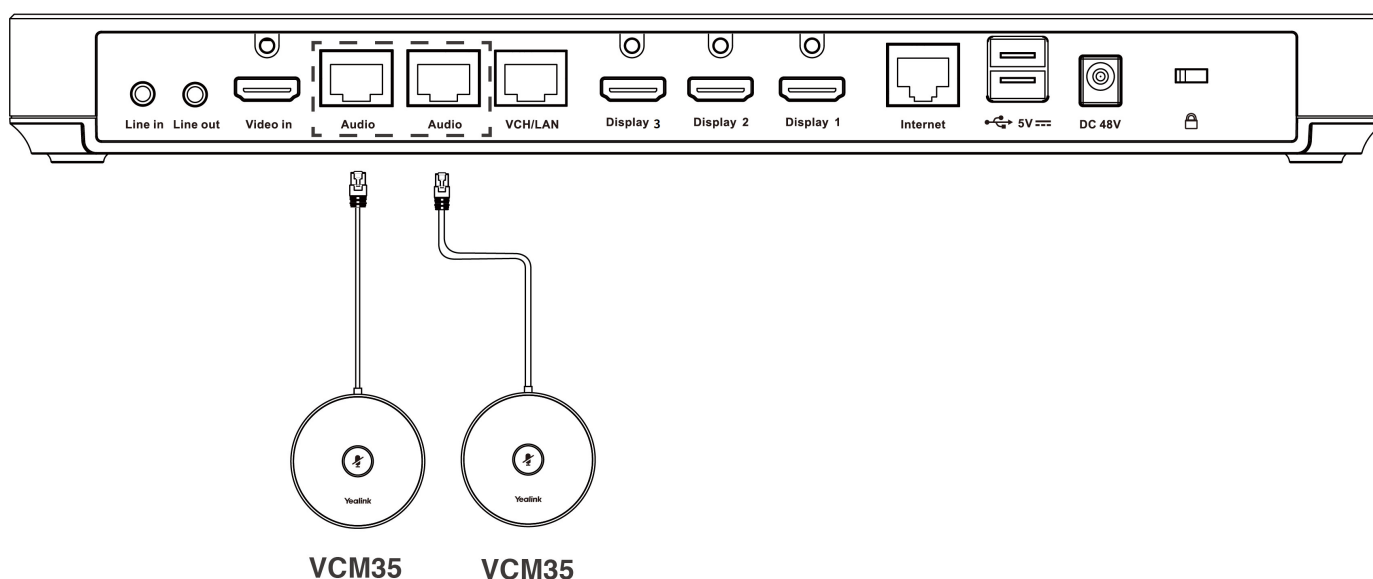

Connect Multiple VCM35

Meeting Eye 500

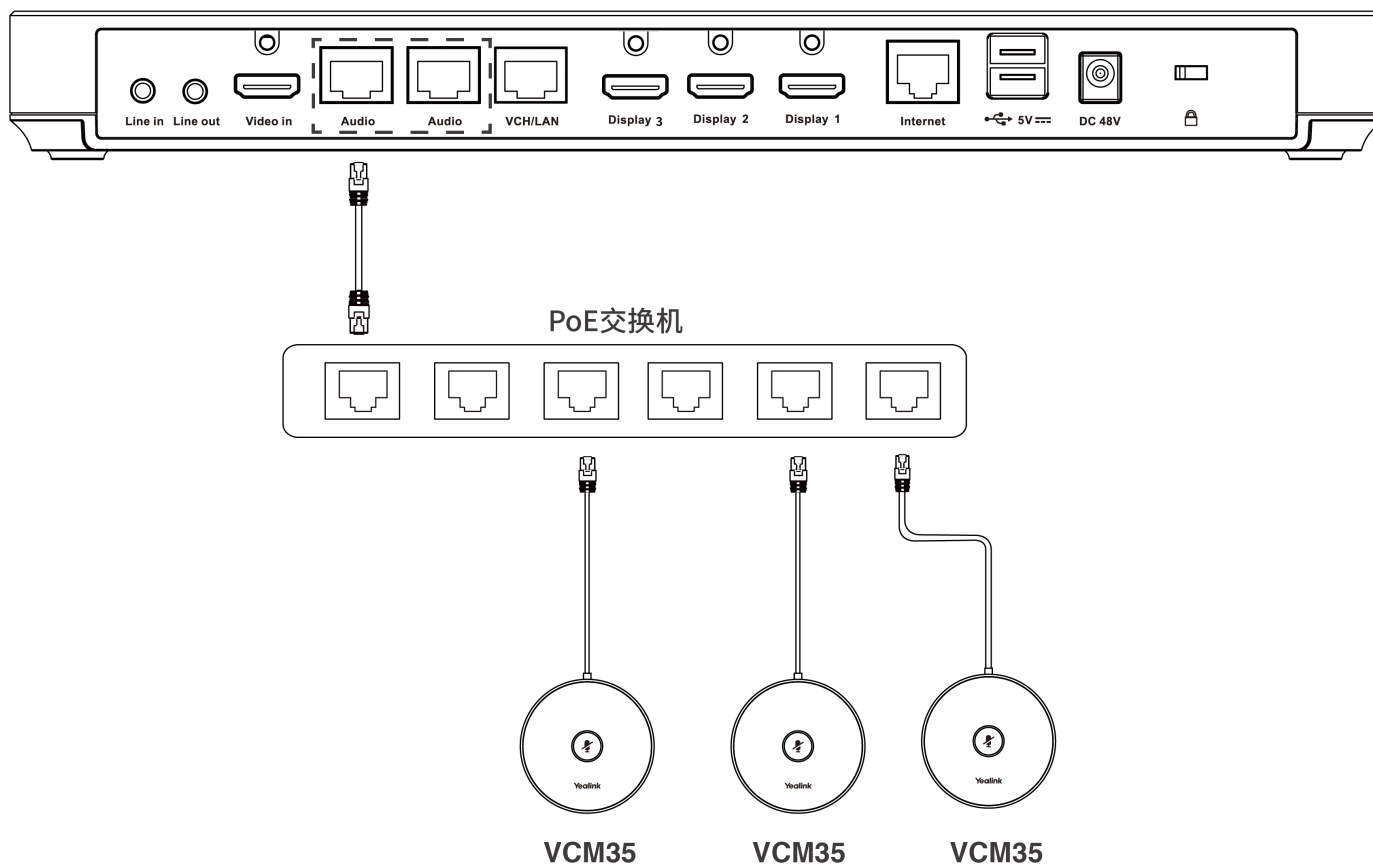

Update VCM35

The VCM35 automatically obtains the ROM package from Yealink MeetingEye. If you need to use the latest version of VCM35 firmware, please update Yealink MeetingEye to the latest version. For more information, please refer to [Firmware Update](#). The VCM35 does not support individual updates.