

Pair VCM35 with Yealink MeetingBar

Introduction

The Yealink VCM35 is a wired video conferencing microphone array designed for the latest generation of Yealink Video Conferencing Systems. Featuring a built-in 3-microphone array with a 16-foot (5-meter) voice pickup range, the VCM35 provides an exceptional audio experience, making it an ideal choice for conference rooms requiring high-quality sound.

Equipped with Yealink Acoustic Echo Canceling and Noise Proof Technology, the VCM35 effectively reduces ambient noise by up to 90 dB, ensuring clear, full-duplex audio during calls.

The VCM35 supports star-cascaded deployment, offering excellent scalability and flexibility. This design simplifies installation and enables coverage of various room sizes, providing a versatile and efficient solution for diverse conferencing needs.

Before You Begin


- For the compatibility of VCM35 and Yealink MeetingBar, refer to [Rooms Accessories Compatibility Lists](#).
- For how to install the VCM35, refer to [Yealink VCM35 Quick Start Guide](#).

Connect VCM35 to Yealink MeetingBar


Connect a VCM35

Connect VCM35 to the VCH Port of Yealink MeetingBar. The display prompts **Mic array connection**.


MeetingBar

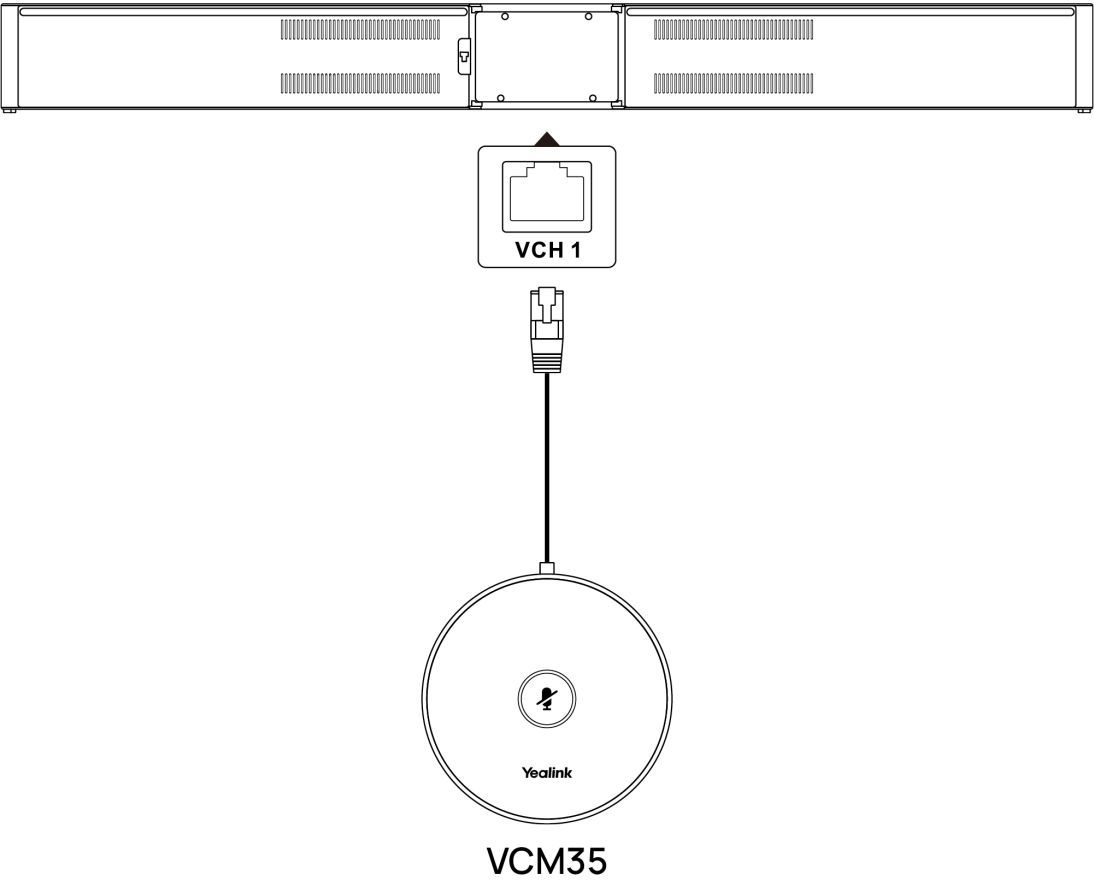

Connect multiple VCM35

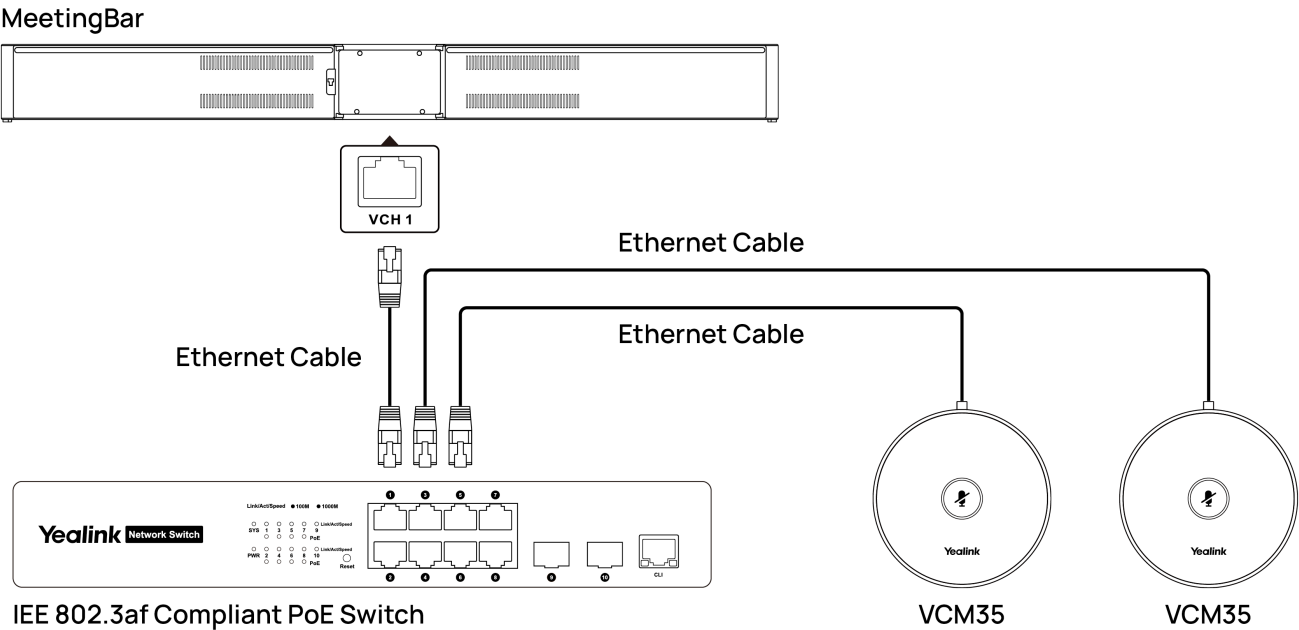

Connect VCM35 and VCH51 simultaneously

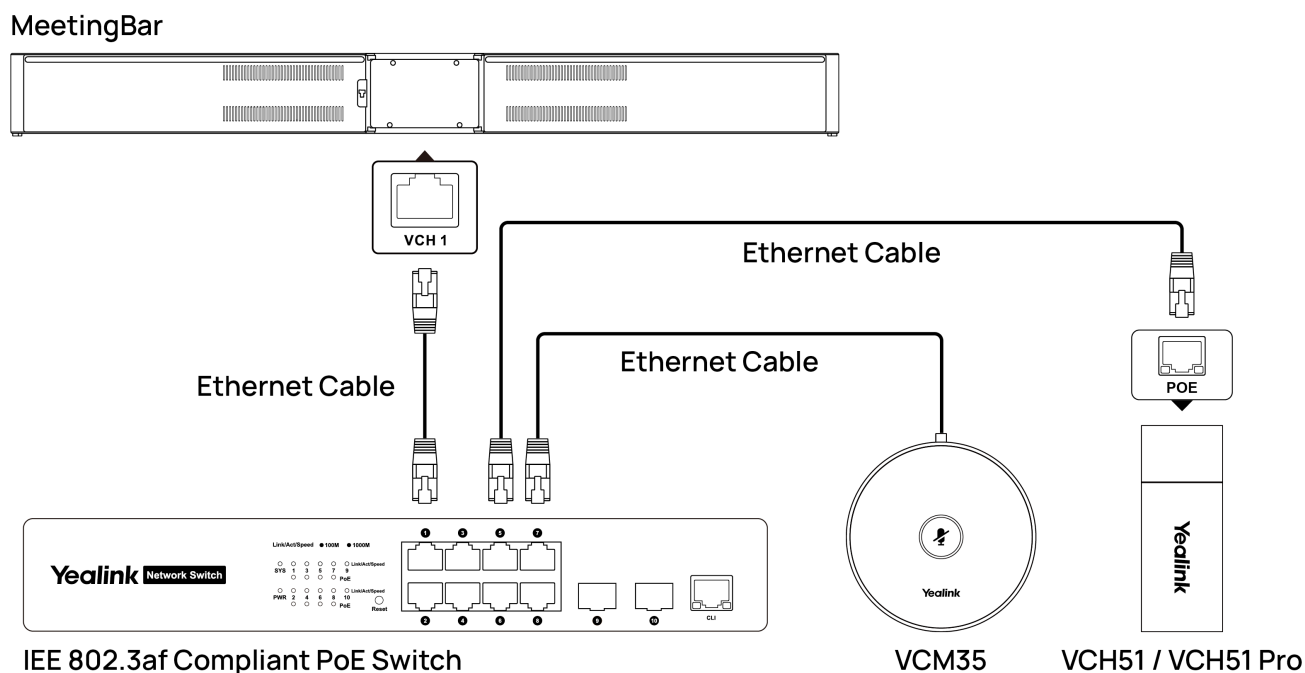

Update VCM35

The VCM35 automatically obtains the ROM package from Yealink MeetingBar. If you need to use the latest version of VCM35 firmware, please update the Yealink MeetingBar to the latest version. For more information, please refer to [Firmware Update](#). The VCM35 does not support individual updates.

FAQ

Can VCM35 and the built-in microphone of Yealink MeetingBar pick up sound at the same time?

- When using VCM35 with A10/A20/A30, it functions as an external microphone and does not support picking up sound with the built-in microphone simultaneously.
- When using VCM35 with A40, it functions as an extension microphone. VCM35 supports simultaneous audio pickup with the built-in microphone. It automatically selects between VCM35 and the endpoint's built-in microphone based on the audio source location.

For more information about the sound pickup of the built-in microphone and external microphone, please refer to [Can the built-in microphone and external microphone pick up sound at the same time?](#)

After connecting Yealink MeetingBar to the VCM35, the VCM35 cannot pick up the audio, and there is no response when touching the VCM35 mute button.

Yealink MeetingBar does not support the simultaneous use of multiple different types of microphones, such as the simultaneous use of VCM35 and VCM36-W.

How to reset the VCM35 microphone?

The VCM35 microphone does not support reset.